

DBH OLIVE AVENUE CAMPUS REMODEL

5555 E. OLIVE AVENUE
FRESNO, CA 93727

Contract # 24-S-09

The County of Fresno
Department of Public Works and Planning
2220 Tulare St., 8th Floor
Fresno, California 93721

PROJECT MANUAL

Pre-bid Conference: Wednesday, February 12, 2025, 10:00 A.M.

Bid Date: Thursday, February 27, 2025
2:00 P.M. (1400 hours and 00 seconds)

Budget / Account – 0400 / 10072 / 8872 / 8150 / 91940



Development Services & Capital Projects Division

Department of Public Works and Planning

CONTRACT # 24-S-09

ADDENDUM 01

Contract # 24-S-09


Dated: February 21, 2025

The foregoing documents are amended in the respects as herein set forth. This addendum and the amendments herein shall become part of said documents and of any contract entered into pursuant to said documents.

PLEASE ACKNOWLEDGE THIS ADDENDUM ON YOUR PROPOSAL. IF YOU HAVE GIVEN THE CONTRACT DOCUMENTS TO SOMEONE ELSE, PLEASE FORWARD THIS ADDENDUM.

2025-02-21

Date Signed



Architect of Record: _____

Barry Mast, Lic.# C-38769

FRESNO COUNTY
Department of Public Works and Planning
Development Services and Capital Projects Division
m/a 2220 Tulare Street, Eighth Floor
Fresno, CA 93721 (559) 600-4536
bmast@fresnocountyca.gov

A. BID FORMS: PAPER

- a. Section 0002113 Instructions to Bidders
1.06. SUBMISSION OF PROPOSAL

DELETE: A Electronic Bid Submittal

The bidder has the option to submit the bid for this Project electronically. The bidder must either attach an electronic bid bond or provide an original bid bond (or other form of bid security authorized by Public Contract Code Section 20129(a)), prior to the bid opening.

Bidders submitting online may use one of the accepted electronic sureties (Tinubu Surety or Surety 2000) to submit their bid bond; or may submit cash, cashier's check, certified check, or a bidder bond to Design Services at 2220 Tulare St., Seventh Floor, Fresno, CA 93721. Those submitting bid bonds directly to Design Services must submit their bid bond:

1. Under sealed cover
2. Marked as a bid-bond
3. Identifying the contract number and the bid opening date on the cover

If necessary, please e-mail DesignServices@fresnocountyca.gov or call (559) 353-4919 or (559) 600-4543, so that arrangements may be made to hand deliver your bid bond. Each proposal shall be submitted in a sealed envelope labeled to clearly indicate the contract and contents.

REPLACE with: A. Electronic Bid Submittal

The bidder has the option to submit the bid for this Project electronically. The bidder must either attach an electronic bid bond or provide an original bid bond (or other form of bid security authorized by Public Contract Code Section 20129(a)), prior to the bid opening.

Bidders submitting online may

1. use one of the accepted electronic sureties (Tinubu Surety or Surety 2000) to submit their bid bond; or
2. attach to the online bid a scan of a notarized paper bid, followed by delivery of the original paper notarized bidder's bond by the admitted surety insurer so that it is received by Design Services no later than 4:00 PM on the fifth (5th) calendar day after the bid opening.; or
3. submit cash, cashier's check, certified check, or a bidder bond so that it is received by Design Services prior to the bid opening.

Hardcopy bid bonds shall be

- submitted in a sealed envelope
- addressed to "Department of Public Works and Planning, Office of the Design Engineer" and
- labeled with
 - the name of the bidder,
 - contract number,
 - name of the project, and
 - the statement "Do Not Open Until The Time Of Bid Opening – BID BOND."

The address for hand delivery is listed in the Notice to Bidders for the bid opening (Seventh Floor, Fresno County Plaza Building, 2220 Tulare St., Fresno, CA 93721). The address for delivery by mail is Sixth Floor, Fresno County Plaza Building, 2220 Tulare Street, Fresno, CA 93721).

B. BID FORMS: BID EXPRESS

Bid Security Form Section 004313 – 1 replaced with Bid Security Form
Section 004313 - 1A and replaced Required Documents with Required Documents A.
Updated to add the option of attaching a scan of a notarized paper bid bond.

C. CONTRACT CONDITIONS

- a. Section 005213 Agreement
Article III

DELETE:

The Contractor agrees that the work under the contract shall be completed as determined by the Owner within **TWO HUNDRED FIFTY (250) CALENDAR DAYS** from the date shown in the Notice to Proceed.

REPLACE with:

The Contractor agrees that the work under the contract shall be completed as determined by the Owner within **TWO HUNDRED FIFTY (250) WORKING DAYS** from the date shown in the Notice to Proceed.

D. SPECIFICATIONS

- a. Section 015000 Temporary Facilities and Controls
1.2 USE CHARGES

DELETE:

B. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use with metering. Provide connections and extensions of services and metering as required for construction operations.

C. Electric Power Service from Existing System: Electric power from Owner's existing system is available for use with metering. Provide connections and extensions of services and metering as required for construction operations.

E. DRAWINGS:

No changes

F. GENERAL CLARIFICATIONS:

Toshiba equipment listed on drawings sheet IT03, UPS CONFIGURATION, shall be Owner Furnished, Contractor Installed.

ADDENDUM 02

Contract # 24-S-09


Dated: February 25, 2025

The foregoing documents are amended in the respects as herein set forth. This addendum and the amendments herein shall become part of said documents and of any contract entered into pursuant to said documents.

PLEASE ACKNOWLEDGE THIS ADDENDUM ON YOUR PROPOSAL. IF YOU HAVE GIVEN THE CONTRACT DOCUMENTS TO SOMEONE ELSE, PLEASE FORWARD THIS ADDENDUM.

2025-02-25

Date Signed



Architect of Record: _____

Barry Mast, Lic.# C-38769

FRESNO COUNTY
Department of Public Works and Planning
Development Services and Capital Projects Division
m/a 2220 Tulare Street, Eighth Floor
Fresno, CA 93721 (559) 600-4536
bmast@fresnocountyca.gov

A. PROJECT MANUAL COVER

DELETE:

Thursday, February 27, 2025
2:00 P.M. (1400 hours and 00 seconds)

REPLACE with:

Thursday, March 6, 2025
2:00 P.M. (1400 hours and 00 seconds)

B. SECTION 001113 NOTICE TO BIDDERS

DELETE:

2:00 P.M., (1400 hours and 00 seconds)
Thursday, February 27, 2025

REPLACE with:

2:00 P.M., (1400 hours and 00 seconds)
Thursday, March 6, 2025

C. BID EXPRESS SOLICITATION

General Info

- a. Replace Deadline 02/27/2025 02:00 PM PST with 03/06/2025 02:00 PM PST

ADDENDUM 03

Contract # 24-S-09


Dated: March 3, 2025

The foregoing documents are amended in the respects as herein set forth. This addendum and the amendments herein shall become part of said documents and of any contract entered into pursuant to said documents.

PLEASE ACKNOWLEDGE THIS ADDENDUM ON YOUR PROPOSAL. IF YOU HAVE GIVEN THE CONTRACT DOCUMENTS TO SOMEONE ELSE, PLEASE FORWARD THIS ADDENDUM.

2025-03-03

Date Signed



Architect of Record: _____ Barry Mast, Lic.# C-38769

FRESNO COUNTY
Department of Public Works and Planning
Development Services and Capital Projects Division
m/a 2220 Tulare Street, Eighth Floor
Fresno, CA 93721 (559) 600-4536
bmast@fresnocountyca.gov

A. BID FORMS: Bid Express Solicitation

No changes

B. BID FORMS: Paper

No changes

C. SPECIFICATIONS / PROCUREMENT CONTRACTING REQUIREMENTS – DIVISION 00

- a. **Section 00 01 10 – Table of Contents**
No changes
- b. **Section 00 11 13 – Notice to Bidders**
No changes
- c. **Section 00 52 13 – Agreement**
No changes
- d. **Section 00 72 00 – General Conditions**
No changes

D. SPECIFICATIONS / SPECIAL PROVISIONS – DIVISION 01

No changes

E. DRAWINGS

- a. Replace the following sheets as attached.
 - i. A-107 FLOOR PLAN AREA D – Revised to include reference to enlarged plan at WORK/COPY [109]. See detail E9/A-408.
 - ii. A-408 ENLARGED PLANS AND INTERIOR ELEVS
 - 1. Revised to add detail E9 ENLARGED FLOOR PLAN at WORK / COPY [109].
 - 2. Revised detail A1 INTERIOR ELEVATIONS to add interior elevation at WORK / COPY [109] 1.
 - iii. M-104 MECHANICAL SCHEDULES – Revised to clarify ODU-1 and ODU-2 equipment. See OUTDOOR UNIT SCHEDULE, note 3.
 - iv. M-107 MECHANICAL DETAILS – ODU piping diagrams added. See details E, F, G, H and J.
 - v. E-011 CABLE AND CONDUIT SCHEDULE – Schedule revised. See item numbers 138 through 143.
 - vi. E-016 SITE PANEL SCHEDULED – PANEL SITE1 revised.
 - vii. E-017 FIXTURE AND DEVICES – EXTERIOR FIXTURE SCHEDULES, fixture type E6 revised.
 - viii. E-021 NEW SINGLE LINE DIAGRAM – AT&T system single line diagram revised.
 - ix. E-022 NEW SWITCHBOARD ELEVATION AND LAYOUT – Switchboard elevations and layouts revised to indicate preliminary bus duct and transformer design for basis of bid.
 - x. E-051 NEW ELECTRICAL UTILITY PLAN – Plan revised to include basis of bid estimated PG&E Rule 16 requirements.
 - xi. E-058 SITE LIGHTING PLAN – ELECTRICAL SITE PLAN revised to indicate fixture type E6 at all building ingress/egress points. See also sheet E-017.

F. GENERAL CLARIFICATIONS

- a. Refer to Responses to Requests for Clarification published on the County's Bid page.

- b. Disregard dashed wall-mounted equipment in OBSERV STAFF rooms 661 & 662. These will be overhead storage units provided by the County furniture supplier and are not part of this contract.
- c. Delete "New" from all Panel Schedule headers on sheet IT02 PANEL SCHEDULES. See sheet E-010 LOAD CALCULATIONS, ELECTRICAL EQUIPMENT for existing panel list and new designations.
- d. The new fire alarm system is a deferred submittal and shall be designed, permitted and installed by the Contractor as part of this contract. All other low-voltage systems such as Security and Data are not in this contract and will be provided by County Vendors. See also response to RFC 24S9-68.
- e. Contractor shall remove all existing asphalt and aggregate base, and prep soil as indicated on Civil drawings. Contractor shall provide new paving and aggregate base as indicated on pavement sections. See also sheet C9.
- f. Existing exterior light poles and bases shall remain as indicated on Architectural sheets AD101 and AS101 unless noted otherwise. Existing light pole fixtures shall be replaced per Electrical sheets E-017 and E-058.

END OF SECTION

SECTION 000107 - COUNTY ADOPTION AND ACKNOWLEDGEMENT & SEALS

DBH OLIVE AVENUE CAMPUS REMODEL

Contract # 24-S-09

Ernest "Buddy" Mendes, Chairman
Garry Bredefeld, Vice Chairman
Brian Pacheco
Luis Chavez
Nathan Magsig

4th District
2nd District
1st District
3rd District
5th District

Paul Nerland, County Administrative Officer

Steve White Digitally signed by Steve White
Date: 2025.01.29 10:49:18
-08'00'

Steven E. White, Director
Department of Public Works and Planning

2025-01-28

Date Signed



Architect: _____

Barry Mast, Lic. # C-38769

FRESNO COUNTY
Department of Public Works and Planning
Development Services and Capital Projects Division
m/a 2220 Tulare Street, Eighth Floor
Fresno, CA 93721 (559) 600-4536
bmast@fresnocountyca.gov

CONTRACT # 24-S-09

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

COUNTY ADOPTION AND
ACKNOWLEDGMENT & SEALS
SECTION 000107 - 2

2025-01-24

Date Signed



Civil Engineer Consultant: _____

Josh Gillander, PE, No. 92042

Provost & Pritchard Consulting Group

455 W. Fir Ave., Clovis, CA, 93611

(559) 449-2700

jgillander@ppeng.com

DBH OLIVE CAMPUS REMODEL
FRESNO, CA

COUNTY ADOPTION AND
ACKNOWLEDGMENT & SEALS
SECTION 000107 - 3

2025-01-25

Date Signed



Structural Engineer Consultant:

Robert Parrish, PE, SE, No. S2331

Provost & Pritchard Consulting Group / Parrish Hansen Structural Division

455 W. Fir Ave., Clovis, CA, 93611

(559) 449-2700

bparrish@ppeng.com

CONTRACT # 24-S-09

DBH OLIVE CAMPUS REMODEL
FRESNO, CA

COUNTY ADOPTION AND
ACKNOWLEDGMENT & SEALS
SECTION 000107 - 4

2025-01-24

Date Signed



Plumbing/Mechanical Consultant: _____

Michael D. Cantelmi, PE, No. M23588

Lawrence Engineering Group

4910 E. Clinton Way, Suite 101, Fresno, CA 93727
(559) 431-0101
mike@legfresno.com

DBH OLIVE CAMPUS REMODEL
FRESNO, CA

COUNTY ADOPTION AND
ACKNOWLEDGMENT & SEALS
SECTION 000107 - 5

2025-01-24

Date Signed



Electrical Consultant: _____

Joe Prevendar, EE, No. 16581

Electrical Power Systems

2187 Herndon Ave, Suite #102, Clovis, CA 93611
(559) 221-7230
joe@epsfresno.com

TABLE OF CONTENTS

INDEX TO TECHNICAL SPECIFICATIONS AND BID DOCUMENTS

SECTION NUMBER SECTION TITLE Number of Pages

DIVISION 00 – PROCUREMENT CONTRACTING REQUIREMENTS

00 01 01	COVER SHEET.....	1
00 01 07	COUNTY ADOPTION AND ACKNOWLEDGMENT & SEALS	5
00 01 10	TABLE OF CONTENTS	4
00 11 13	NOTICE TO BIDDERS	5
00 21 13	INSTRUCTIONS TO BIDDERS.....	7
00 22 13	BIDDERS' CHECKLIST.....	2
00 42 13	PROPOSAL FORM	2
	Bidder's Declaration	
	Bid Form	
00 43 13	BID SECURITY FORM.....	1
00 43 36	SUBCONTRACTOR LIST	5
00 45 19	NON-COLLUSION DECLARATION	1
00 46 56	TITLE 13 CARB CERTIFICATION	1
00 52 13	AGREEMENT.....	8
	Exhibit A – Self Dealing Transaction Disclosure Form	
00 65 36	GUARANTY	1
00 72 00	GENERAL CONDITIONS.....	65

SPECIAL PROVISIONS

SECTION NUMBER SECTION TITLE

GENERAL REQUIREMENTS SUBGROUP

DIVISION 01 - GENERAL REQUIREMENTS

01 25 00	SUBSTITUTION PROCEDURES
01 31 00	PROJECT MANAGEMENT AND COORDINATION
01 33 00	SUBMITTAL PROCEDURES
01 40 00	QUALITY REQUIREMENTS
01 42 00	REFERENCES
01 50 00	TEMPORARY FACILITIES AND CONTROLS
01 51 36	WATERING
01 56 39	TEMPORARY TREE AND PLANT PROTECTION
01 57 23	STORM WATER POLLUTION PREVENTION PLAN
01 57 27	DUST CONTROL

01 60 00	PRODUCT REQUIREMENTS
01 73 00	EXECUTION
01 77 00	CLOSEOUT PROCEDURES
01 78 23	OPERATION AND MAINTENANCE DATA
01 78 39	PROJECT RECORD DOCUMENTS
01 79 00	DEMONSTRATION AND TRAINING

FACILITY CONSTRUCTION SUBGROUP

DIVISION 02 - EXISTING CONDITIONS

02 01 20	PROTECTION OF UNDERGROUND FACILITIES AND SURVEY MONUMENTS
02 41 00	DEMOLITION
02 41 19	SELECTIVE DEMOLITION

DIVISION 03 - CONCRETE

03 10 00	CONCRETE FORMWORK
03 20 00	CONCRETE REINFORCEMENT
03 30 00	CAST-IN-PLACE CONCRETE
03 33 15	CONCRETE WALKS, CURBS, GUTTERS AND DRIVEWAYS
03 39 00	CONCRETE CURING

DIVISION 04 - MASONRY

04 22 00	CONCRETE UNIT MASONRY

DIVISION 05 - METALS

05 12 00	STRUCTURAL STEEL FRAMING
05 40 00	COLD-FORMED METAL FRAMING
05 50 00	METAL FABRICATIONS
05 52 13	PIPE AND TUBE RAILINGS

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES

06 10 00	ROUGH CARPENTRY
06 41 16	PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS
06 64 00	PLASTIC PANELING

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

07 21 00	THERMAL INSULATION
07 26 00	VAPOR RETARDERS
07 92 00	JOINT SEALANTS
07 92 19	ACOUSTICAL JOINT SEALANTS

DIVISION 08 - OPENINGS

08 11 16.13	INTERIOR ALUMINUM DOORS AND FRAMES
08 14 16	FLUSH WOOD DOORS
08 31 13	ACCESS DOORS AND FRAMES
08 41 13	ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS
08 71 00	DOOR HARDWARE

08 80 00	GLAZING
08 81 13	DECORATIVE GLASS GLAZING
08 83 00	MIRRORS

DIVISION 09 - FINISHES

09 22 16	NON-STRUCTURAL METAL FRAMING
09 29 00	GYPSUM BOARD
09 30 13	CERAMIC TILING
09 51 13	ACOUSTICAL PANEL CEILINGS
09 65 13	RESILIENT BASE AND ACCESSORIES
09 65 16	RESILIENT SHEET FLOORING
09 65 19	RESILIENT TILE FLOORING
09 65 36	STATIC-CONTROL RESILIENT FLOORING
09 68 13	TILE CARPETING
09 69 00	ACCESS FLOORING
09 91 13	EXTERIOR PAINTING
09 91 23	INTERIOR PAINTING

DIVISION 10 - SPECIALTIES

10 21 13.19	PLASTIC TOILET COMPARTMENTS
10 22 39	FOLDING PANEL PARTITIONS
10 26 00	WALL AND DOOR PROTECTION
10 28 00	TOILET, BATH, AND LAUNDRY ACCESSORIES
10 44 13	FIRE PROTECTION CABINETS
10 44 16	FIRE EXTINGUISHERS

DIVISION 11 - EQUIPMENT

11 52 13	PROJECTION SCREENS

DIVISION 22 – PLUMBING

22 00 00	PLUMBING

DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

23 00 00	GENERAL MECHANICAL PROVISIONS
23 00 01	HEATING, VENTILATING AND AIR CONDITIONING
23 09 23	DIRECT DIGITAL CONTROL AND ENERGY MANAGEMENT SYSTEM

DIVISION 26 – ELECTRICAL

26 00 00	GENERAL ELECTRICAL PROVISIONS
26 05 73	OVERCURRENT PROTECTIVE DEVICE/ARC FLASH
26 10 00	BASIC ELECTRICAL REQUIREMENTS
26 11 00	ELECTRICAL RELATED WORK
26 20 00	BASIC MATERIALS AND METHODS
26 21 00	ELECTRICAL IDENTIFICATIONS
26 30 00	SERVICE, DISTRIBUTION AND GROUNDING
26 30 20	PAD MOUNT TRANSFORMERS

26 31 00	DRY TYPE TRANSFORMERS
26 32 00	MOTOR CONTROL CENTERS AND CONTROLS
26 40 00	FIXTURES – LED
26 43 00	TRANSIENT VOLTAGE SURGE SUPPRESSION
26 49 50	HEAVY DUTY SAFETY SWITCHES
26 49 60	MANUAL TRANSFER SWITCHES
26 50 00	EQUIPMENT CONNECTIONS
26 92 40	AC VARIABLE FREQUENCY DRIVES
26 96 09	ELECT. COMMISSIONING AND FIELD TESTING

DIVISION 31 - EARTHWORK

31 11 00	CLEARING AND GRUBBING
31 22 19	FINISH GRADING
31 23 00	EARTHWORK

DIVISION 32 - EXTERIOR IMPROVEMENTS

32 11 23	AGGREGATE BASE
32 12 16	ASPHALT CONCRETE PAVING
32 17 13	PRECAST CONCRETE WHEEL STOPS
32 17 23	TRAFFIC MARKINGS
32 17 27	DETECTABLE WARNING TACTILE PANELS
32 31 19	DECORATIVE METAL FENCES AND GATES
32 33 00	SITE FURNISHINGS

END OF TABLE OF CONTENTS

BOARD OF SUPERVISORS

COUNTY OF FRESNO

STATE OF CALIFORNIA

NOTICE TO BIDDERS

Sealed proposals will be received at:

<https://www.bidexpress.com/businesses/36473/home>

and at the

Fresno County Department of Public Works and Planning, Office of the Design Engineer
Seventh Floor, Fresno County Plaza Building
2220 Tulare Street, Fresno, CA 93721

until

**2:00 P.M., (1400 hours and 00 seconds)
Thursday, February 27, 2025**

at which time the bidding will be closed.

If you have any questions about bid submission, please contact us at
DesignServices@fresnocountyca.gov or call (559) 353-4919 or (559) 600-4543.

Promptly following the closing of the bidding all timely submitted bids will be publicly opened and viewable via a livestream (the link for which will be posted at <http://www.fresnocountyca.gov/planholders>) for construction in accordance with the project specifications therefor, to which special reference is made as follows:

DBH OLIVE AVENUE CAMPUS REMODEL

**5555 E. OLIVE AVENUE
FRESNO, CA 93727**

Contract No. 24-S-09

The work to be done consists, in general, of remodeling the Department of Behavioral Health (DBH) building, an approximately 115,000 square foot office building located at 5555 E. Olive Avenue, Fresno, CA 93727. The building interior will be renovated to provide adult and children behavioral health service suites, adult and children urgent care suites, medical and records support suites, a multi-purpose/childcare suite, and staff offices.

Contract: #24-S-09

Working Days: Complete all work for submittals and ordering materials/equipment within 250 working days (refer to Section 005123, Agreement).

Prebid Conference: A pre-bid conference will be held at 10:00 a.m., on February, 12, 2025. A discussion of the project will be held and the project site will be open for examination. Contractors should meet at 5555 E. Olive Avenue, Fresno, CA 93727. Attendance at the pre-bid is **mandatory** for prime contractors; attendance by subcontractors is encouraged, but not required. The scheduled pre-bid will be the only opportunity for prospective bidders to visit the site in the presence of County staff, and requests for individual site visits with County staff will not be granted.

This project is subject to the contracting requirements and implementing regulations as amended in Title 13, Section 2449 General Requirements for In-Use Off-Road Diesel-Fueled Fleets, of the California Code of Regulations (13 CCR § 2449(i)). Bidders must submit a valid Certificate of Reported Compliance (CRC) issued by the California Air Resources Control Board at the time of bidding. Bidders are responsible for submitting their listed subcontractors' CRCs and any supporting documentation within five (5) calendar days of bid opening. Failure to submit the required CRCs may render a bid non-responsive.

Bidders may fill out a Request to be Added to Planholders list:

<https://www.fresnocountyca.gov/Departments/Public-Works-and-Planning/Construction-Bidding-Opportunities/Request-to-Be-Added-to-the-Planholders-List-Form>

Requesters will then be listed as a planholder for the project on the website and receive notifications and addenda issued for the project.

Prospective bidders may also select the project on <https://www.bidexpress.com/businesses/36473/home>. Those that demonstrate interest in the project will be added to the planholders list, and receive notifications and addenda issued for the project.

Electronic copies, in ".pdf" file format, of the official project plans and specifications, bid books and proposal sheets, as well as cross sections and such additional supplemental project information as may be provided, are available to view, download, and print at <http://www.fresnocountyca.gov/planholders>.

If a bidder is unable to submit a bid via Bid Express, Bid Books, which contain bid proposal sheets necessary to submit a bid, may be obtained within the Project Manual/Specifications documents posted on the Fresno County website.

Electronic bids shall be submitted via the Bid Express website. Hardcopy bids shall be submitted in a sealed envelope addressed to the Department and labeled with the name of the bidder, name of the project, the contract number, and the statement "Do Not Open Until the Time of Bid Opening."

Bid security in the amount of ten (10) percent of the amount of the bid, and in the form of a bid bond issued by an admitted surety insurer licensed by the California Department of Insurance, cash, cashier's check or certified check shall accompany the bid. You must either attach an electronic bid bond or provide an original bid bond (or other form of bid security authorized by Public Contract Code section 20129(a)), prior to the bid opening. Bid security shall be made in favor of the County of Fresno.

Hardcopy bid bonds shall be submitted in a sealed envelope addressed to the Department and labeled with the name of the bidder, the name of the project, the contract number, and the statement "Do Not Open Until the Time of Bid Opening – BID BOND"

A Summary of Bids and a list of subcontractors for the apparent low bidder will be posted at the above listed website, generally within 24 hours of the Bid Opening.

The apparent lowest bidder shall submit a Cost Distribution of the bid, otherwise known as a "Schedule of Values," (refer to Section 002113 Instructions to Bidders 1.16 Post-Bid / Pre-Award Information and Requirements) within eight (8) days of the Bid Opening.

All requests for substitutions (refer to Section 007200 General Conditions 2.45, Substitution of Materials) and questions regarding this project shall be in writing and shall be received by the Department of Public Works and Planning, Design Division, no later than 2:00 P.M. on the tenth (10th) calendar day prior to bid opening. All substitution requests and questions received after this deadline will not receive a response unless the Department of Public Works and Planning elects to issue an addendum to revise the bid opening date. In the event that the bid opening date is revised, the deadline for questions will be extended to no later than 2:00 P.M. on the tenth (10th) calendar day before the revised bid opening date. Questions shall be submitted on the "Request for Clarification" form provided on the project website at:

<https://www.fresnocountyca.gov/Departments/Public-Works-and-Planning/Construction-Bidding-Opportunities/24-S-09-DBH-Olive-Avenue-Campus-Remodel/Request-for-Clarification-Form>

Any changes to, or clarification of, the Contract documents and specifications, including approved substitutions, shall be in the form of a written addendum issued to planholders of record. Questions that prompt a change or clarification shall be included in the addendum with the subsequent answer.

Any oral explanation or interpretations provided with regard to this project are not binding.

No contract will be awarded to a contractor who has not been licensed in accordance with the provisions of the Contractors State License Law, California Business and Professions Code, Division 3, Chapter 9, as amended, or whose bid is not on the proposal form included in the contract document. A valid California Contractor's License, **Class B (General Building)**, is required for this project.

Asbestos certification from the Contractors State License Board and registration with the Division of Occupational Safety and Health is not required to bid this project. [Health and Safety Code 25914.2]

The Contractor and their subcontractors shall comply with all applicable statutes and regulations, and all provisions of Sections 2.51, 2.52 and 2.55 of the General Conditions, regarding payment of wages, hours of work and all other labor compliance issues.

Pursuant to Section 1773 of the Labor Code, the general prevailing wage rates in the county, or counties, in which the work is to be done have been determined by the Director of the California Department of Industrial Relations. These wages are set forth in the General Prevailing Wage Rates for this project, available at County of Fresno, Department of Public Works and Planning, 2220 Tulare Street, Sixth Floor, Fresno CA 93721-2104 and available from the California Department of Industrial Relations' Internet web site at <http://www.dir.ca.gov/DLSR/PWD>. Future effective general prevailing wage rates, which have been predetermined and are on file with the California Department of Industrial Relations are referenced but not printed in the general prevailing wage rates.

This project is subject to compliance monitoring and enforcement by the Department of Industrial Relations.

No contractor or subcontractor may be listed on a bid proposal for a public works project unless registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5 [with limited exceptions from this requirement for bid purposes only under Labor Code section 1771.1(a)].

No contractor or subcontractor may be awarded a contract for public work on a public works project unless registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5.

This contract is subject to state contract nondiscrimination and compliance requirements pursuant to Government Code, Section 12990.

Bids are required for the entire work described herein. Bids will be compared on the basis of the total lump sum bid.

In addition to the bid bond required by law of all bidders on public works projects, the successful bidder shall furnish a faithful performance bond, a payment bond and a warranty bond in accordance with the provisions of Section 2.36 of the General Conditions.

The successful bidder shall furnish a faithful performance bond in the amount of 100 percent of the contract amount and a payment bond in the amount of 100 percent of the contract amount. Each bond specified in this Notice (bid bond, faithful performance bond and payment bond) shall meet the requirements of all applicable statutes, including but not limited to those specified in Public Contract Code section 20129 and Civil Code section 3248.

Each bond specified in this Notice shall be issued by a surety company designated as an admitted surety insurer in good standing with and authorized to transact business in this state by the California Department of Insurance, and acceptable to the County of Fresno. Bidders are cautioned that representations made by surety companies will be verified with the California Department of Insurance. Additionally, the County of Fresno, in its discretion, when determining the sufficiency of a proposed surety company, may require the surety company to provide additional information supported by documentation. The County generally requires such information and documentation whenever the proposed surety company has either a Best's Key Rating Guide of less than **A** and a financial size designation of less than **VIII**. Provided, however, that the County expressly reserves its right to require all information and documentation to which the County is legally entitled from any proposed surety company.

Pursuant to Public Contract Code Section 22300, substitution of securities for any moneys withheld by the County of Fresno to ensure performance under the contract shall be permitted.

The Board of Supervisors reserves the right to reject any or all bids.

Board of Supervisors, County of Fresno

Paul Nerland, County Administrative Officer

Bernice E. Seidel, Clerk to the Board

Issue Date: January 28, 2025

INSTRUCTIONS TO BIDDERS

1.01 EXPLANATION TO BIDDERS

An explanation desired by bidders regarding the meaning or interpretation of the bid documents must be requested in writing no later than 10 days prior to the bid opening.

Oral explanations given before the award of the contract will not be binding. Any interpretation made will be in the form of an addendum to the bid documents, said addendum will only be issued by the County's Director of Public Works and Planning ("Director"). Any addenda or supplemental information will be published on the Fresno County website at <https://www.fresnocountyca.gov/planholders> and the planholders of record will be notified.

1.02 EXAMINATION OF PLANS, SPECIFICATIONS, SPECIAL PROVISIONS AND SITE OF WORK

The bidder is required to examine carefully the proposal, plans, specifications, special provisions, and contract forms for submitting a proposal. It is mutually agreed that the submission of a proposal shall be considered prima facie evidence that the bidder has made such examination and is satisfied with the conditions to be encountered in performing the work and as to the requirements of the plans, specifications, and special provisions of the contract documents.

1.03 PROPOSAL GUARANTEE

The bidder shall furnish a proposal guarantee, consisting of a bid bond, cash, certified check, or cashier's check, for ten percent (10%) of the total amount bid, including additives.

If security is provided in the form of a certified check or cashier's check, the County may make such disposition of same as will accomplish the purpose for which submitted. Checks deposited by unsuccessful bidders will be returned as soon as practicable after the bid opening.

1.04 PREPARATION OF PROPOSALS

The bidder shall prepare a proposal on the blank proposal form furnished by the County.

The bidder's proposal shall be executed by the individual, by one or more partners of the partnership, or by one or more of the officers of the corporation submitting it. If the proposal is made by an individual, a name and post office address must be shown. If made by a partnership, the name of each member of the partnership must be shown. If made by a corporation, the proposal must show the name of the state under which the corporation was chartered and the name of the president, vice president, secretary and treasurer.

1.05 SUBCONTRACTORS

Every person submitting a bid to perform the work called for in the bid request shall set forth in this bid:

- A. The name and the location of the place of business, and the California contractor's license number, and the public works contractor registration number issued pursuant to Section 1725.5 of the Labor Code, of each subcontractor who will perform work or labor or render service to the general contractor in or about the construction of the work or improvement in an amount in excess of one-half (1/2) of one percent (1%) of the general contractor's total bid; and
- B. The portion of the work which will be done by each subcontractor.

The attention of bidders is directed to the provisions of Public Contract Code Section 4100 et seq which set forth the consequences and possible penalties which may result from a failure to comply strictly with the foregoing requirements for listing of subcontractors.

1.06 SUBMISSION OF PROPOSAL

A. Electronic Bid Submittal

The bidder has the option to submit the bid for this Project electronically. The bidder must either attach an electronic bid bond or provide an original bid bond (or other form of bid security authorized by Public Contract Code Section 20129(a)), prior to the bid opening.

Bidders submitting online may use one of the accepted electronic sureties (Tinubu Surety or Surety 2000) to submit their bid bond; or may submit cash, cashier's check, certified check, or a bidder bond to Design Services at 2220 Tulare St., Seventh Floor, Fresno, CA 93721. Those submitting bid bonds directly to Design Services must submit their bid bond:

- 1. Under sealed cover
- 2. Marked as a bid-bond
- 3. Identifying the contract number and the bid opening date on the cover

If necessary, please e-mail DesignServices@fresnocountyca.gov or call (559) 353-4919 or (559) 600-4543, so that arrangements may be made to hand deliver your bid bond.

Each proposal shall be submitted in a sealed envelope labeled to clearly indicate the contract and contents.

B. Bid Submittal by Personal Delivery or by Mail

The bidder has the option to submit the bid by personal delivery or by mail. The bidder shall specify, on the blank Proposal form, a lump sum price in both words and figures for each bid item, including alternates, additives and supplemental items. If the bid is not submitted electronically, then all words and figures shall be written on the Proposal form in ink. In the case of a discrepancy between the prices written in words and those written in figures,

the written words shall govern. The bidder's proposal shall be signed in ink by the individual executing the bid on behalf of the bidder.

The required Proposal Guarantee must accompany the proposal.

When sent by mail, a sealed proposal must be addressed to the Fresno County Department of Public Works and Planning, Office of the Design Engineer, Sixth Floor, Fresno County Plaza Building, 2220 Tulare Street, Fresno, CA 93721. All proposals shall be filed prior to the time and at the place specified in the NOTICE TO BIDDERS. Proposals received after the time for opening of the proposals will be returned to the bidder unopened.

1.07 IRREGULAR PROPOSALS

Proposals that do not conform to bid requirements may be rejected as nonresponsive. Proposals shall be considered irregular and may be rejected for various reasons, including but not limited to the following:

- A. The proposal forms furnished by the County are not used or are altered.
- B. There are unauthorized additions, conditional or alternate proposals or irregularities of any kind which tend to make the proposal incomplete or indefinite.
- C. The bidder adds any provision reserving the right to accept or reject an award, or to enter into a contract pursuant to an award.
- D. The bid fails to contain a price for each bid component.

1.08 DISQUALIFICATION OF BIDDERS

Any one or more of the following may be considered to constitute sufficient cause for disqualification of a bidder and rejection of that bidder's proposal:

- A. More than one proposal for the same work from an individual, partnership or corporation.
- B. Evidence of collusion among bidders. Participants in such collusion will receive no recognition as bidders for any future work of the County until such participant shall have been reinstated as a qualified bidder.
- C. Lack of competency or inadequate machinery, plant or other equipment as considered necessary to perform this project, as may be revealed by financial statement if required.
- D. Unsatisfactory performance record as shown by past work for the County, judged from the standpoint of workmanship and progress.
- E. Prior commitments or obligations which in the judgment of the County might hinder or prevent the prompt completion of the work.

- F. Failure to pay, or satisfactorily settle, all bills due for labor or materials which remain pending under any former contract(s) at the time of submittal of the bid for this project.
- G. Failure to comply with any prequalification requirements of the County.
- H. Failure to furnish full amount of Proposal Guarantee with bid or failure to sign bid bond.

1.09 WITHDRAWAL OR REVISION OF PROPOSALS

A bidder may, without prejudice, withdraw a proposal after it has been deposited, provided the request for such withdrawal is received in writing before the time set for opening proposals. The request shall be executed by the bidder or the bidder's duly authorized representative and shall include the name of the individual authorized to receive the withdrawn proposal. Said individual shall be required to present photo identification prior to withdrawing the proposal. The bidder may then submit a revised proposal provided it is received prior to the time set for opening proposals.

1.10 PUBLIC OPENING OF PROPOSALS

Proposals will be opened and read publicly at the time and place indicated in the Notice to Bidders. Bidders or their authorized agents are invited to be present.

1.11 BID PROTEST PROCEDURE / RELIEF OF BIDDER

A. BID PROTEST PROCEDURE

Any bid protest must be submitted in writing and delivered by the Bidder by either of the following means: (1) via e-mail to DesignServices@fresnocountyca.gov; or (2) via certified mail, return receipt requested to the following address: Design Division, Department of Public Works and Planning, 2220 Tulare Street, Sixth Floor, Fresno, CA 93721.

The bid protest must be received no later than 5:00 p.m. of the seventh (7th) calendar day following the deadline for submittal of the specific bid document(s) placed at issue by the protest. Any Bidder filing a protest is encouraged to submit the bid protest via e-mail, because the deadline is based on the Department's receipt of the bid protest. A bid protest accordingly may be rejected as untimely if it is not received by the deadline, regardless of the date on which it was postmarked. The Bidder's compliance with the following additional procedures also is mandatory:

The initial protest document shall contain a complete statement of the grounds for the protest, including a detailed statement of the factual basis and any supporting legal authority.

The protest shall identify and address the specific portion of the document(s) forming the basis for the protest.

The protest shall include the name, address and telephone number of the person representing the protesting party.

The Department will provide a copy of the initial protest document and any attached documentation to all other Bidders or proposers who appear to have a reasonable prospect of receiving an award depending upon the outcome of the protest.

The Board of Supervisors will issue a decision on the protest. If the Board of Supervisors determines that a protest is frivolous, the party originating the protest may be determined to be irresponsible and that party may be determined to be ineligible for future contract awards.

The procedure and time limits set forth herein are mandatory and are the Bidder's sole and exclusive remedy in the event of a bid protest. Failure by the Bidder to comply with these procedures shall constitute a waiver of any right to further pursue the bid protest, including the subsequent filing of a Government Code Claim or legal proceedings.

B. RELIEF OF BIDDER

A bidder who claims a mistake in their bid must follow the procedures in Public Contract Code Section 5100 et seq in seeking relief of their bid.

1.12 AWARD OF CONTRACT

The award of the contract, if it is awarded, will be to the lowest responsible bidder whose proposal complies with all the prescribed requirements. The award, if made, will be within 68 days after the opening of proposals.

If the County finds that it will be unable to award the contract within 68 calendar days after the opening of proposals, the Director may request any or all bidders to extend all terms of their proposal(s) to a specified date. It is possible that additional extensions may subsequently be requested. If a bidder does not elect to extend the terms of their proposal beyond the 68 calendar days following opening of proposals, or does not respond within 10 days to any request for an extension, that bidder's proposal will be deemed as having expired 68 calendar days following opening of the proposals, and that bidder's proposal will not be considered for award of the contract.

The successful bidder will be notified in writing, by letter mailed to the address shown on their proposal, that their bid has been accepted and that they have been awarded the contract.

The right is reserved by the County to reject any or all proposals, to waive technicalities (such as immaterial bid irregularities), to advertise for new proposals, or to proceed to do this work otherwise, if in the judgment of the awarding authorities the best interests of the County will be promoted thereby.

1.13 CANCELLATION OF AWARD

The awarding authority reserves the right to cancel the award of any contract at any time before the execution of said contract by all parties without any liability against the County.

1.14 CONTRACT BONDS

The bidder to whom the award is made shall, within ten days, enter into a written contract with the County. The bidder shall forfeit the Proposal Guarantee in case the bidder does not follow through with execution of the written contract within ten days after the contract is awarded.

The successful bidder shall furnish a faithful performance bond in the amount of 100 percent (100%) of the contract amount and a payment bond in the amount of 100 percent (100%) of the contract amount, and one-year Warranty Bond in the amount of 10 percent (10%) of the contract amount. Said bonds shall be submitted in triplicate.

The payment bond shall contain provisions such that if the Contractor or their subcontractors shall fail to pay (a) amounts due under the Unemployment Insurance Code with respect to work performed under the contract, or (b) any amounts required to be deducted, withheld and paid over to the Employment Development Department and to the Franchise Tax Board from the wages of the employees of the Contractor and subcontractors pursuant to Section 13020 of the Unemployment Insurance Code with respect to such work and labor, then the surety will pay these amounts. In case suit is brought upon the payment bond, the surety will pay a reasonable attorney's fee to be fixed by the court.

The contract form is attached hereto for the Contractor's information only. Execution of the contract by the successful bidder will not be required until after the bid award is made. Liability and Workers Compensation Insurance requirements shall be as set forth in the Agreement.

1.15 BUILDERS RISK INSURANCE

The Contractor shall obtain and maintain in force Builder's Risk Insurance against loss or damage from all perils. The policy shall cover the entire structure on which the work of this contract is to be done, up to the full insurable value thereof (except that if the contract is for remodeling, alteration, repair, or maintenance, then the policy shall cover the value of the contract therefore), including items of labor and materials connected therewith on the site, materials in place or to be used as part of the permanent construction including materials stored and partially paid for by the County as provided in Division 00-General Conditions, surplus materials, shanties, protective fences, bridges, or temporary structures, miscellaneous materials and supplies incident to the work, and such scaffolding, stagings, towers, forms and equipment as are not owned or rented by the Contractor, the cost of which is included in the cost of the work. EXCLUDED: This insurance does not cover any tools owned by mechanics, any tools, equipment, scaffolding, staging, towers, and forms owned or rented by the Contractor, the capital value of which is not included in the cost of the work, or any structures erected for the Contractor's administration of the project.

All subcontractors shall be insured to the extent of their portion of the work under the Contractor. The Contractor shall request, and is responsible to confirm with its insurer, that the County and all subcontractors are named, both as additional insured and as additional loss payees, on the Builder's Risk insurance policy. The County, Contractor, and all subcontractors waive all rights, each against the others, for damages arising from perils covered by the insurance required under the terms of this article, except such rights as they may have to the proceeds of the Builder's Risk insurance obtained and maintained by the Contractor. The Contractor shall file a certificate of such insurance with the County upon issuance of the policy, and with any subcontractors upon its request.

1.16 POST-BID / PRE-AWARD INFORMATION

Within eight (8) calendar days after bid opening, the apparent low bidder shall submit the following information to the DesignServices@fresnocountyca.gov:

- a. A cost distribution of the bid, with costs shown for major items of work as defined by either the project specification index, the Uniform Construction Index (UCI), or other method as appropriate for the project and approved by the Engineer.
- b. The cost distribution shall distinguish between work to be done by the bidder's own forces and work that will be subcontracted (including those who are to furnish materials or equipment fabricated to a special design); all subcontractors shall be named, regardless of the dollar amount of subcontracted work. Bidders' attention is also directed to California Public Contract Code Section 4100 et seq regarding subcontracting.

The County reserves the right to reject any proposed subcontractor, installer, or supplier who cannot show satisfactory evidence of meeting the qualifications required by the specification documents. In the event of such rejection, the apparent low bidder shall, within five working days, submit the name and qualifications of a replacement subcontractor, installer, or supplier satisfactory to the County. Such replacement submittal shall be in accordance with all specification requirements.

No adjustment of bid prices shall be made in the event of such replacement.

This information may be used in the evaluation of bids. If the project is awarded, the cost distribution will be used in determining amounts payable on progress payments and final payment.

The County may request that bidders other than the apparent low bidder submit similar cost distribution or qualification information, for the purpose of evaluating bids.

Upon completion of the bid evaluation process, cost distributions or qualification information submitted by other than the apparent low bidder will be returned upon request.

END OF SECTION

BIDDERS' CHECKLIST (BUILDING CONTRACTS)

Because of numerous technical irregularities resulting in rejected proposals for projects, the following checklist is offered for the bidders' information and use in preparing the proposal. This checklist is not to be considered as part of the contract documents. Bidders are cautioned that deleting or not submitting a form supplied in the bid documents (even if the form does not require signature) may result in an irregular bid.

PROPOSAL/BID SHEET (Section 004213)

Bidder name on each sheet. Price for each item including: each additive, deductive, supplemental or alternate items. Make no additions such as "plus tax", "plus freight", or conditions such as "less 2% if paid by 15th". Use ink or typewriter. Acknowledge addenda.

BID SECURITY FORM - Read the Notices and Notes (Section 004313)

Indicate type of bid security provided.
Provide contract license information.

State business name and if business is a:

Corporation - list officers

Partnership - list partners

Joint Venture - list members

If Joint Venture members are corporations or partnerships, list their officers or partners.

Individual - list Owner's name and firm name style

Signature of Bidder – BID MUST BE SIGNED!

Corporation - by an officer

Partnership - by a partner

Joint Venture - by a member

Individual - by the Owner

If signature is by a Branch Manager, Estimator, Agent, etc., the bid must be accompanied by a power of attorney authorizing the individual to sign bids, otherwise the bid may be rejected.

Business Address - Firm's Street Address

Mailing Address - P.O. Box or Street Address

BID SECURITY (PROPOSAL GUARANTEE)

Ten percent (10%) of the total amount bid (to include supplemental or additive items).

Type of Bid Security:

Cash - Not recommended; cash is deposited in a clearing account and is returned to bidders by County warrant. This process may take several weeks.

Cashier's or Certified Checks - Will be held until the bid is no longer under consideration. If submitted by a potential awardee, they will be returned when the contract bonds are submitted and approved.

Bid Bonds - Must be signed by the bidder and by the attorney-in-fact for the bonding company. Signature of attorney-in-fact should be notarized and the bond should be accompanied by bonding company's affidavit authorizing attorney-in-fact to execute bonds. An unsigned bid bond will be cause for rejection. If the bid is submitted electronically, then the bidder must either attach an electronic bid bond or provide an original bid bond (or other form of bid security authorized by Public Contract Code Section 20129(a)), prior to the bid opening, as more thoroughly specified in the Instructions to Bidders, Section 1.04.A ("Electronic Bid Submittal").

SUBCONTRACTOR LIST (Section 004336)

One firm for each type of work to be subcontracted. Fill out as completely as possible. Name and location of place of business, California contractor's license number, public works contractor registration number issued pursuant to Section 1725.5 of the Labor Code, and description of work to be performed are required to be listed for each subcontractor in accordance with Public Contract Code section 4104.

NON-COLLUSION DECLARATION (Section 004519)

Must be completed, signed, and returned with bid.

TITLE 13 CARB CERTIFICATION (Section 004556)

Contractors, if applicable, must submit valid Certificates of Reported Compliance with their bid. Subcontractor certificates will be due no later than 4:00 PM on the fifth (5th) calendar day after the bid opening if not submitted with the bid.

GUARANTY OF WORK (Section 006536)

Does not need to be submitted with the bid. (Must be signed and submitted by the successful bidder together with the executed contract and requisite bonds and insurance certificates, within ten days after award of the Project.)

OTHER

If the bid forms have been removed from the Specifications booklet, staple the pages together.

Make sure the bid envelope is sealed and shows the project name, bid package and contract number.

If the bid is mailed, allow sufficient time for postal delivery prior to the bid closing time. Bids received after the scheduled time will be returned unopened. Be sure the statement "**DO NOT OPEN UNTIL TIME OF BID OPENING**" is on the envelope.

END OF SECTION

PROPOSAL TO THE COUNTY OF FRESNO

Contract: **DBH OLIVE AVENUE CAMPUS REMODEL**

Contract No.: **24-S-09**

Fund / Subclass / Org / Account / Program or Memo No.: **0400 / 10072 / 8872 / 8150 / 91940**

Work to be performed: The work to be done consists, in general, of remodeling the Department of Behavioral Health (DBH) building, an approximately 115,000 square foot office building located at 5555 E. Olive Avenue, Fresno, CA 93727. The building interior will be renovated to provide adult and children behavioral health service suites, adult and children urgent care suites, medical and records support suites, a multi-purpose/childcare suite, and staff offices.

The work to be done is shown on a set of Plans, entitled: "THE COUNTY OF FRESNO DEPARTMENT OF BEHAVIORAL HEALTH OLIVE AVENUE CAMPUS REMODEL – VOLUME 1" and "THE COUNTY OF FRESNO DEPARTMENT OF BEHAVIORAL HEALTH OLIVE AVENUE CAMPUS REMODEL – VOLUME 2"

Building No.: **632**

Project Address:
**5555 E. Olive Avenue
Fresno, CA 93727**

In case of a discrepancy between words and figures, the words shall prevail.

If this proposal shall be accepted and the undersigned shall fail to contract, as aforesaid, and to give the two bonds in the sums to be determined as aforesaid, each issued by a surety satisfactory to the Awarding Authority, within ten (10) days after the award of the contract, the Awarding Authority, at its option, may determine that the bidder has abandoned the contract, and thereupon this proposal and the acceptance thereof shall be null and void, and the forfeiture of such security accompanying this proposal shall operate and the same shall be the property of the County.

The undersigned, as bidder, declares that all addenda issued with respect to this bid have been received and incorporated into this Proposal. The bidder's signature on this Proposal also constitutes acknowledgement of all addenda.

The undersigned, as bidder, declares that the only persons, or parties interested in this proposal as principals are those named herein; that this proposal is made without collusion with any other person, firm or corporation; that the bidder has carefully examined the annexed proposed form of contract, and the plans therein referred to; and the bidder proposes and agrees if this proposal is accepted, that the bidder will contract with the County of Fresno to provide all necessary machinery, tools, apparatus and other means of construction, and to do all the work and furnish all the materials specified in the contract in the manner and time therein prescribed, and according to the requirements of the County as therein set forth, and that the bidder will take in full payment therefor the following lump sum price, to-wit:

BID FORM

BIDDER: BMY Construction Group, Inc.

Contract No.: 24-S-09 Project: DBH OLIVE AVENUE CAMPUS REMODEL	
Lump Sum Price Written In Words	In Figures
1.) Base Bid Seventeen Million six hundred eighty seven thousand Dollars	\$ 17,687,000

Acknowledgment of Addendum:			
Addendum No. <u> 1 </u>	Dated <u> 2/21/25 </u>	Addendum No. <u> 3 </u>	Dated <u> 3-3-25 </u>
Addendum No. <u> 2 </u>	Dated <u> 2/25/25 </u>	Addendum No. <u> </u>	Dated <u> </u>

END OF PROPOSAL FORM
END OF SECTION

BID SECURITY FORM

PROJECT: DBH OLIVE AVENUE CAMPUS REMODEL

CONTRACT: #24-S-09

Accompanying this proposal is security (check one only) in an amount equal to at least ten percent (10%) of the total amount of the bid:

Bid Bond ☒; Certified Check ☐; Cashier's Check ☐; Cash (\$ _____)

The names of all persons interested in the foregoing proposal as principals are as follows:

Business Name BMV Construction Group, Inc.

Note: If bidder or other interested person is a corporation, state legal name of corporation. If bidder is a co-partnership, state true name of firm.

Business Owners and Officers Names Eric Bower- President, Marissa Bower, Officer, Nick Wicks- Officer

Note: If bidder or other interested person is:

- a corporation, list names of the president, secretary, treasurer and manager thereof
- a partnership, list names of all individual co-partners composing firm.
- an individual, state first and last name in full.

Names of Owners and Key Employees Eric Bower - Owner

Note: List majority owners of your firm. If multiple owners, list all. Also include anyone, including key employees, who are actively promoting the contract. (SB1439)

Licensed in accordance with an act providing for the registration of Contractors:

Class A, B, C-8 Contractor License No. 686178 Expires 1/31/2027

DIR Registration Number 1000000147

Business Address: 5485 E. Olive Ave. Fresno, CA 93727

Mailing Address: 5485 E. Olive Ave. Fresno, CA 93727

Business Phone: (559) 243-4200 Fax Number: () N/A

Email Address estimating@bmyinc.com

Signature of Bidder:  Dated: 2/20/2025

NOTE: If bidder is a corporation, the legal name of the corporation shall be set forth above together with the signature of the officer or officers authorized to sign contracts on behalf of the corporation; if bidder is a co-partnership, the true name of the firm shall be set forth above together with the signature of the partner or partners authorized to sign contracts on behalf of the co-partnership; and if bidder is an individual, their signature shall be placed above. If signature is by an agent, other than an officer of a corporation or a member of a partnership, a Power of Attorney must be on file with the Owner prior to opening bids or submitted with the bid; otherwise, the bid will be disregarded as irregular and unauthorized.

END OF SECTION

CONTRACT # 24-S-09

BIDDER: BMY Construction Group, Inc.

SUBCONTRACTORS

The following named subcontractor(s) will perform with labor, or otherwise render services to the general contractor in or about the construction of the work or improvement in an amount in excess of one-half of one percent of the total bid presented herewith. Submission of subcontractor's name, location of business and description of work, California contractor's license number and public works contractor registration number issued pursuant to Section 1725.5 of the Labor Code, all are REQUIRED, by Section 4104 of the California Public Contract Code, to be submitted prior to bid opening. (The "location of business" must specify the city in which the subcontractor's business is located, and the state if other than California.) All other requested information shall be submitted, either with the bid or within 24 hours after bid opening.

Please fill out as completely as possible when submitting your bid. Use subcontractor's business name style as registered with the License Board.

FAILURE TO LIST SUBCONTRACTORS AS DIRECTED MAY RENDER THE BID NON-RESPONSIVE, OR MAY RESULT IN ASSESSMENT OF A PENALTY AGAINST THE BIDDER IN ACCORDANCE WITH SECTION 4110 OF THE CALIFORNIA PUBLIC CONTRACT CODE.

SUBCONTRACTOR: <u>CenCal Services</u>	
Business Address: <u>Fresno</u>	
Class: _____	License No. <u>976935</u> DIR Registration No. <u>1000002906</u>
Item No. or Description of Work: <u>Demolition</u>	
Dollar Amount: _____	OR Percentage of Total Bid: _____
Email Address: _____	

SUBCONTRACTOR: <u>CenCal Services</u>	
Business Address: <u>Fresno</u>	
Class: _____	License No. <u>976935</u> DIR Registration No. <u>1000002906</u>
Item No. or Description of Work: <u>Concrete</u>	
Dollar Amount: _____	OR Percentage of Total Bid: _____
Email Address: _____	

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: Ceiling Experts
Business Address: Roseville
Class: _____ License No. 917629 DIR Registration No. 1000006305
Item No. or Description of Work: Popcorn Acoustic Ceiling
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Popcorn Acoustic Ceiling~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Popcorn Acoustic Ceiling~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Legacy Insulation
Business Address: Salida
Class: _____ License No. 1070962 DIR Registration No. 100817223
Item No. or Description of Work: Insulation
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Popcorn Acoustic Ceiling~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: <u>American Window</u> Business Address: <u>Napa</u> Class: _____ License No. <u>1066478</u> DIR Registration No. <u>1000853023</u> Item No. or Description of Work: <u>Doors / Frames / Hardware</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: <u>American Window</u> Business Address: <u>Napa</u> Class: _____ License No. <u>1066478</u> DIR Registration No. <u>1000853023</u> Item No. or Description of Work: <u>Glass / Glazing</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: <u>Jackson Young</u> Business Address: <u>Clovis</u> Class: _____ License No. <u>1026018</u> DIR Registration No. <u>100056320</u> Item No. or Description of Work: <u>Metal Framing / Drywall</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: <u>Visalia Ceramic Tile</u> Business Address: <u>Visalia</u> Class: _____ License No. <u>481599</u> DIR Registration No. <u>100000896</u> Item No. or Description of Work: <u>Ceramic Tile</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: <u>~~XXXXXXXXXXXXXXXXXXXX~~</u> Business Address: <u>~~XXXXXXXXXXXXXXXXXXXX~~</u> Class: _____ License No. <u>~~XXXXXXXXXXXX~~</u> DIR Registration No. <u>~~XXXXXXXXXXXX~~</u> Item No. or Description of Work: <u>~~XXXXXXXXXXXX~~</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: DFS Flooring
Business Address: Fresno
Class: _____ License No. 999046 DIR Registration No. 1000006695
Item No. or Description of Work: Flooring
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Duration Painting
Business Address: Fresno
Class: _____ License No. 831 338 DIR Registration No. 1000511999
Item No. or Description of Work: Painting
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Painting~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Shelco
Business Address: Fresno
Class: _____ License No. 423565 DIR Registration No. 1000007336
Item No. or Description of Work: Toilet Compartments / Accessories
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Pyramid Systems
Business Address: _____
Class: _____ License No. 721011 DIR Registration No. 1000002660
Item No. or Description of Work: Casework
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

BIDDER: BMY Construction Group, Inc.

SUBCONTRACTOR: Johnson Fire Protection
Business Address: Visalia
Class: _____ License No. 945080 DIR Registration No. 1000022773
Item No. or Description of Work: Fire Sprinklers
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: American Inc.
Business Address: Visalia
Class: _____ License No. 292529 DIR Registration No. 1000000369
Item No. or Description of Work: Plumbing
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: ~~FOSSO~~
Business Address: ~~FOSSO~~
Class: _____ License No. ~~FOSSO~~ DIR Registration No. ~~FOSSO~~
Item No. or Description of Work: ~~FOSSO~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Berg Electric
Business Address: Rancho Cordova
Class: _____ License No. 85046 DIR Registration No. 1000000328
Item No. or Description of Work: Electrical
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: El Dorado Excavation
Business Address: Clovis
Class: _____ License No. 1046481 DIR Registration No. 10000062319
Item No. or Description of Work: Earthwork / Paving
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: <u>~~Emcor~~ Fresno Fence Connection</u> Business Address: <u>Fresno</u> Class: _____ License No. <u>692620</u> DIR Registration No. <u>1000014751</u> Item No. or Description of Work: <u>Fencing</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: <u>Emcor</u> Business Address: <u>Fresno</u> Class: _____ License No. <u>611215</u> DIR Registration No. <u>1000395293</u> Item No. or Description of Work: <u>HVAC</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: _____ Business Address: _____ Class: _____ License No. _____ DIR Registration No. _____ Item No. or Description of Work: _____ Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: _____ Business Address: _____ Class: _____ License No. _____ DIR Registration No. _____ Item No. or Description of Work: _____ Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: _____ Business Address: _____ Class: _____ License No. _____ DIR Registration No. _____ Item No. or Description of Work: _____ Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

6

CONTRACT: DBH OLIVE AVENUE CAMPUS REMODEL
CONTRACT NO.: 24-S-09

To the Board of Supervisors, County of Fresno:

NON-COLLUSION DECLARATION TO BE EXECUTED BY BIDDER AND SUBMITTED
WITH BID *

The undersigned declares:

"I am the Owner of
(Owner, Partner, Corporate Officer (list title), Co-Venturer)

BMV Construction Group, Inc., the party making the
foregoing bid.

The bid is not made in the interest of, or on behalf of, any undisclosed person, partnership, company, association, organization, or corporation. The bid is genuine and not collusive or sham. The bidder has not directly or indirectly induced or solicited any other bidder to put in a false or sham bid. The bidder has not directly or indirectly colluded, conspired, connived, or agreed with any bidder or anyone else to put in a sham bid, or refrain from bidding. The bidder has not in any manner, directly or indirectly, sought by agreement, communication, or conference with anyone to fix the bid price of the bidder or any other bidder, or to fix any overhead, profit, or cost element of the bid price, or of that of any other bidder. All statements contained in the bid are true. The bidder has not, directly or indirectly, submitted his or her bid price or any breakdown thereof, or the contents thereof, or divulged information or data relative thereto, to any corporation, partnership, company, association, organization, bid depository, or to any member or agent thereof, and has not paid, and will not pay, any person or entity for that purpose.

Any person executing this declaration on behalf of a bidder that is a corporation, partnership, joint venture, limited liability company, limited liability partnership, or any other entity, hereby represents that he or she has full power to execute, and does execute, this declaration on behalf of the bidder.

I declare under penalty of perjury under the laws of the State of California that the foregoing is true and correct and that this declaration is executed on

February 20, 2025 at Fresno, CA.
[date] [city] [state]

Eric Bower
(Printed or Typed Name)


(Signature)

(See Title 23 United States Code Section 112; Calif Public Contract Code Section 7106)

* **NOTE:** Completing, signing, and returning the Non-collusion Declaration is a required part of each Proposal. Bidders are cautioned that making a false certification may subject the certifier to criminal prosecution.

END OF SECTION

**TITLE 13, CALIFORNIA CODE OF REGULATIONS § 2449(I) GENERAL REQUIREMENTS
FOR IN-USE OFF-ROAD DIESEL-FUELED FLEETS**

In conformance with Title 13 § 2449(i), bidders will be required to attach copies of valid Certificates of Reported Compliance for the fleet selected for the contract and their listed subcontractors.

Before May 15th of each year, the prime contractor must collect a new valid Certificate of Reported Compliance for the current compliance year, as defined in section 2449(n), from all fleets that have an ongoing contract with the prime contractor as of March 1 of that year. Prime contractors must not write contracts to evade this requirement. Annual renewals must be provided to the Resident Engineer at least one week prior to the expiration date of the current certificate.

<https://ww2.arb.ca.gov/resources/fact-sheets/fact-sheet-contracting-requirements>

Choose all that apply:

- ☒ Bidder's Certificate of Reported Compliance has been attached to the bid.
- ☐ Bidder does not have a fleet subject to this regulation as outlined in Section 2449(i)(1)-(4).
- ☒ Listed subcontractors' certificates have been attached or will be submitted within five (5) calendar days of the bid opening.
- ☐ The following subcontractors do not have a fleet subject to this regulation as outlined in Section 2449(i)(1)-(4):

**FAILURE TO PROVIDE THE CERTIFICATES OF REPORTED COMPLIANCE AS
DIRECTED MAY RENDER THE BID NON-RESPONSIVE.**

END OF SECTION

CONTRACT # 24-S-09

California Environmental Protection Agency
Air Resources Board

January 1, 2025

**CERTIFICATE OF REPORTED COMPLIANCE
OFF-ROAD DIESEL VEHICLE REGULATION**

is issued to

BMY CONSTRUCTION GROUP INC.

This certificate indicates that the fleet listed above has reported off-road diesel vehicles to the California Air Resources Board and has certified they are in compliance with title 13 CCR, section 2449. All applicable vehicles owned by the individual, company, or agency must be reported and labeled, as specified in Section 2449, with all possible completeness, else this certificate is null and void. **Certificate expires 2/28/2026**



Jack Kitowski
Chief, Mobile Source Control Division
California Air Resources Board

Off-road Diesel Fleet Identification

153899

To verify the authenticity of this certificate, enter this number at
http://www.arb.ca.gov/doors/compliance_cert1.html

AGREEMENT

THIS AGREEMENT is made at Fresno, in Fresno County, California, by and between BMV Construction Group, Inc., hereinafter "Contractor", and the County of Fresno, hereinafter "Owner".

WITNESSETH, the Contractor and the Owner, for the consideration hereinafter named, agree as follows:

ARTICLE I. The Contractor agrees to furnish all labor, equipment and materials, including tools, implements, and appliances required, and to perform all the work in a good and workmanlike manner, free from any and all liens and claims of mechanics, materialmen, subcontractors, artisans, machinists, teamsters, and laborers required for:

DBH OLIVE AVENUE CAMPUS REMODEL
Contract No. 24-S-09

Located at 5555 E. Olive Avenue, Fresno, CA 93727, Fresno, California, all in strict compliance with the plans, drawings, and specifications therefore prepared by the Director of the Fresno County Department of Public Works and Planning and his authorized representatives, hereinafter called the Project Manager, and other contract documents relating thereto.

ARTICLE II. The Contractor and the Owner agree that the Advertisement (Notice to Bidders), the Wage Scale, the Proposal hereto attached, the Instructions to Bidders, the General Conditions of the contract, the Technical Specifications, the Drawings, and the Addenda and Bulletins thereto, the Contract Bonds and Certificates of Liability and Workers Compensation Insurance, and the Contract Change Orders, together with this Agreement form the Contract Documents, and they are as fully a part of the contract as if hereto attached or herein repeated. The Specifications and Drawings are intended to cooperate so that any work exhibited in the drawings and not mentioned in the specifications, or vice versa, is to be executed the same as if both are mentioned in the specifications and set forth in the drawings, to the true intent and meaning of the said drawings and specifications when taken together. Provided, however, that no part of said specifications that is in conflict with any portion of this Agreement, or that is not actually descriptive of the work to be done thereunder, or of the manner in which the said work is to be executed, shall be considered as any part of this Agreement, but shall be utterly null and void, and anything that is expressly stated, delineated or shown in or upon the specifications or Detailed Scope of Work shall govern and be followed, notwithstanding anything to the contrary in any other source of information or authority to which reference may be made.

ARTICLE III. The Contractor agrees that the work under the contract shall be completed as determined by the Owner within **TWO HUNDRED FIFTY (250) WORKING DAYS** from the date shown in the Notice to Proceed. Time of performance shall be deemed as of the essence hereof and it is agreed that actual damages to the Owner from any delay in completion beyond the date provided for herein, or any extension thereof until the work is completed or accepted, shall be all provable damages plus liquidated damages in the amount of **THREE THOUSAND 00/100 DOLLARS (\$3,000.00)** per day; that said liquidated damage was arrived at by a studied estimate of loss to the Owner in the event of a delay considering the following damage items which are extremely difficult or impossible to determine: Additional construction expense resulting from delay of completion including, but not limited to, engineering, inspection, rental and utilities; provided, however, the Owner may conditionally accept the work and occupy and use the same

if there has been such a degree of completion as shall in its opinion render the same safe, fit and convenient for the use for which it is intended and in such cases the Contractor and Surety shall not be charged for liquidated damages for any period subsequent to such conditional acceptance and occupation by the Owner but Owner may assess actual damages caused by failure of total completion during such period. The time during which the Contractor is delayed in said work by the acts or neglects of the Owner or its employees or those under it by contract or otherwise, or by the acts of God which the Contractor could not have reasonably foreseen and provided for, or by storms and inclement weather which delays the work, or by any strikes, boycotts, or like obstructive action by employee or labor organizations, or by any general lockouts or other defensive action by employers, whether general, or by organizations of employers, shall be added to the time for completion as aforesaid.

ARTICLE IV. COMPENSATION: The Owner agrees to make payments on account thereof as provided in the General Conditions in the total amount of **SEVENTEEN MILLION SIX HUNDRED AND EIGHTY SEVEN THOUSAND AND 00/100 DOLLARS (\$17,687,000.00)** in current funds for the performance of the contract which sum is computed as follows: **TOTAL BID LUMP SUM.**

ARTICLE V. The Contractor and the Owner agree that changes in this Agreement or in the work to be done under this Agreement shall become effective only when written in the form of a supplemental agreement or change order and approved and signed by the Owner and the Contractor. It is specifically agreed that the Owner shall have the right to request any alterations, deviations, reductions, or additions to the contract, plans, and/or specifications and the amount of the cost thereof shall be added to or deducted from the amount of the contract price aforesaid by fair and reasonable valuations thereof.

This contract shall be deemed completed when the work is finished in accordance with all Contract Documents as amended by such changes. No such change or modification shall release or exonerate any surety upon any guaranty or bond given in connection with this contract.

ARTICLE VI. In the event of a dispute between the Owner or Project Manager and the Contractor as to an interpretation of any of the specifications or as to the quality of sufficiency of material or workmanship, the decision of the Project Manager shall for the time being prevail and the Contractor, without delaying the job, shall proceed as directed by the Project Manager without prejudice to a final determination by negotiation, arbitration by mutual consent or litigation and should the Contractor be finally determined to be either wholly or partially correct, the Owner shall reimburse him for any added costs he may have incurred by reason of work done or material supplied beyond the terms of the contract as a result of complying with the Project Manager's directions as aforesaid. In the event the Contractor shall neglect to prosecute the work properly or fail to perform any provisions of this contract, the Owner, after three days' written notice to the Contractor, may, without prejudice to any other remedy it may have, make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due to the Contractor, subject to final settlement between the parties as in this paragraph hereinabove provided.

ARTICLE VII. TERMINATION: If the Contractor should be adjudged a bankrupt, or if he should make a general assignment for the benefit of his creditors, or if a receiver should be appointed on account of his insolvency, or if he or any of his subcontractors should persistently violate any of the provisions of the contract, or if he should persistently or repeatedly refuse or should fail, except in cases for which extension of time is provided, to supply enough properly skilled

workmen or proper material, or if he should fail to make prompt payment to subcontractors or for material or labor or persistently disregard laws, ordinances or the instructions of the Project Manager, then the Owner may, upon the certificate of the Project Manager, when sufficient cause exists to justify such action, serve written notice upon the Contractor and his surety of its intention to terminate the contract, such notice to contain the reasons for such intention to terminate the contract, and unless within five (5) days after the serving of such notice, such violations shall cease and satisfactory arrangements for correction thereof be made, the contract shall, upon the expiration of said five days, cease and terminate.

In the event of any such termination, the Owner shall immediately serve written notice thereof upon the surety and the Contractor, and the surety shall have the right to take over and perform the contract, provided, however, that if the surety within ten (10) days after the serving upon it of notice of termination does not give the Owner written notice of its intention to take over and perform the contract or does not commence performance thereof within the ten (10) days stated above from the date of the serving of such notice, the Owner may take over the work and prosecute the same to completion by contract or by any other method it may deem advisable for the account and at the expense of the Contractor, and the Contractor and his surety shall be liable to the Owner for any excess cost occasioned the Owner thereby, and in such event the Owner may without liability for so doing, take possession of and utilize in completing the work, such materials, appliances, plant and other property belonging to the Contractor as may be on the site or the work and necessary therefore. In such case, the Contractor shall not be entitled to receive any further payment until the work is finished.

If the unpaid balance of the contract price shall exceed the expense of finishing the work, including compensation for additional managerial and administrative services, such excess shall be paid to the Contractor. If such expense shall exceed such unpaid balance, the Contractor shall pay the difference to the Owner. The expense incurred by the Owner as herein provided, and damage incurred through the Contractor's default, shall be certified by the Project Manager.

ARTICLE VIII. The Contractor and his subcontractors shall comply with Sections 1770 – 1780 of the California Labor Code and the provisions of Sections 2.52 and 2.55 of the General Conditions concerning the payment of wages to all workers and mechanics, and the employment and payment of apprentices by the Contractor or any subcontractor for all work performed under this Agreement.

ARTICLE IX. The Contractor and his subcontractors shall comply with Sections 1810 to 1815 of the California Labor Code and the provisions of Section 2.51 of the General Conditions, concerning hours of work and payment of overtime compensation for all work performed under this Agreement.

The Board of Supervisors hereby specifies that portions of the work can only be performed outside the regular working hours as defined in the applicable collective bargaining agreement filed with the Director of Industrial Relations in accordance with Labor Code Section 1773.1, and that the overtime requirements for Saturdays, and holidays are hereby waived for these portions of the work, as more particularly described in the specifications. However, this exemption shall not negate the overtime provisions specified in Labor Code Section 1815.

ARTICLE X. INDEMNIFICATION: To the fullest extent permitted by law, Contractor agrees to and shall indemnify, save, hold harmless and at County's request, defend County and its officers, agents and employees, and the Project Manager and their respective officers, agents and employees, from any and all costs and expenses, attorney fees and court costs, damages,

liabilities, claims and losses occurring or resulting to County, or the Project Manager in connection with the performance, or failure to perform, by Contractor, its officers, agents or employees under this Agreement, and from any and all costs and expenses, attorney fees and court costs, damages, liabilities, claims and losses occurring or resulting to any person, firm or corporation who may be injured or damaged by the performance, or failure to perform, of Contractor, its officers, agents or employees under this Agreement. In addition, Contractor agrees to indemnify County for Federal, State of California and/or local audit exceptions resulting from non-compliance herein on the part of Contractor.

In any and all claims against the County, the Project Manager, or any of their respective officers, agents or employees, initiated by any employee of the Contractor, any Subcontractor, anyone directly or indirectly employed by any of them or anyone for whose acts any of them may be liable, the indemnification obligation set forth in the immediately preceding paragraph shall not be limited in any way by any limitation on the amount or type of damages, compensation or benefits payable by or for the Contractor or any Subcontractor under workmen's compensation acts, disability benefit acts or other employee benefit acts.

ARTICLE XI. INSURANCE: Without limiting the Owner's right to obtain indemnification from Contractor or any third parties, Contractor, at its sole expense, in accordance with the provisions of Section 2.40 of the General Conditions, shall maintain in full force and effect the following insurance policies throughout the term of this Agreement, excepting only those policies for which a longer term is specified:

A. Course of Construction (Builder's All Risk) Insurance, with scope and amount of coverage as specified in Section 2.40 E.1 of the General Conditions.

B. Commercial General Liability Insurance, with scope and amount of coverage as specified in Section 2.40 E.2 of the General Conditions.

C. Automobile Liability Insurance, with scope and amount of coverage as specified in Section 2.40 E.2 of the General Conditions.

D. Professional Liability Insurance, with scope and amount of coverage as specified in Section 2.40 E.3 of the General Conditions.

E. Worker's Compensation Insurance, with scope and amount of coverage as specified in Section 2.40 E. 4 of the General Conditions.

The Certificate of Insurance shall be issued in triplicate, to the County of Fresno, and all other participating agencies, whether or not said agencies are named herein, who contribute to the cost of the work or have jurisdiction over areas in which the work is to be performed and all officers and employees of said agencies while acting within the course and scope of their duties and responsibilities.

ARTICLE XII. MISCELLANEOUS PROVISIONS:

1. AUDITS AND INSPECTIONS: The Contractor shall at any time during business hours, and as often as the Owner may deem necessary, make available to the Owner for examination all of its records and data with respect to the matters covered by this Agreement. The Contractor shall, upon request by the Owner, permit the Owner to audit and inspect all of such records and data necessary to ensure Contractor's compliance with the terms of this Agreement. If this Agreement exceeds ten thousand dollars (\$10,000.00), Contractor shall be subject to the examination and audit of the Auditor General for a period of three (3) years after final payment under contract (Government Code Section 8546.7).

2. INDEPENDENT CONTRACTOR: In performance of the work, duties, and obligations assumed by Contractor under this Agreement, it is mutually understood and agreed that Contractor, including any and all of Contractor officers, agents and employees, will at all times be acting and performing as an independent contractor, and shall act in an independent capacity and not as an officer, agent, servant, employee, joint venture, partner, or associate of the Owner. Contractor and Owner shall comply with all applicable provisions of law and the rules and regulations, if any, of governmental authorities having jurisdiction over matters of the subject thereof. Because of its status as an independent contractor, Contractor shall have absolutely no right to employment rights and benefits available to Owner's employees. Contractor shall be solely liable and responsible for providing to, or on behalf of, its employees all legally-required employee benefits. In addition, Contractor shall be solely responsible and save Owner harmless from all matters related to payment of Contractor's employees, including compliance with social security, withholding, and all other regulations governing such matters. It is acknowledged that during the term of this Agreement, Contractor may be providing services to others unrelated to the Owner or to this Agreement.

3. DISCLOSURE OF SELF-DEALING TRANSACTIONS: This provision is only applicable if the Contractor is operating as a corporation (a for-profit or non-profit corporation) or if during the term of the agreement, the Contractor changes its status to operate as a corporation. Members of the Contractor's Board of Directors shall disclose any self-dealing transactions that they are a party to while Contractor is providing goods or performing services under this agreement. A self-dealing transaction shall mean a transaction to which the Contractor is a party and in which one or more of its directors has a material financial interest. Members of the Board of Directors shall disclose any self-dealing transactions that they are a party to by completing and signing a Self-Dealing Transaction Disclosure Form, attached hereto as Exhibit A and incorporated herein by reference, and submitting it to the Owner prior to commencing with the self-dealing transaction or immediately thereafter.

ARTICLE XIII. The Contractor represents that he has secured the payment of Workers Compensation in compliance with the provisions of the Labor Code of the State of California and Paragraphs B.3, C.3 and E.4 of Article 2.40 of the General Conditions, and will continue so to comply with such statutory and contractual provisions for the duration and entirety of the performance of the work contemplated herein.

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

AGREEMENT
SECTION 005213 - 6

This Contract, **24-S-09**, was awarded by the Board of Supervisors on April 22, 2025. It has been reviewed by the Department of Public Works and Planning and is in proper order for signature of the Chairman of the Board of Supervisors.

IN WITNESS WHEREOF, they have executed this Agreement this 20th day of May, 2025.

BMY Construction Group, Inc.
(CONTRACTOR)

COUNTY OF FRESNO
(OWNER)

By: [Signature]
Name: Eric L. Bower
Title: President

By: [Signature]
Ernest "Buddy" Mendes, Chairman
of the Board of Supervisors of the
County of Fresno

ATTEST:
Bernice E. Seidel
Clerk of the Board of Supervisors
County of Fresno, State of
California

By: [Signature]
Deputy

FOR ACCOUNTING USE ONLY
VARIOUS ORGS.
0400 / 10072 / 8872 / 8150 / 91940

END OF SECTION

CONTRACT # 24-S-09

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

GUARANTY
SECTION 006536 - 1

**DBH OLIVE AVENUE CAMPUS REMODEL
CONTRACT NO: 24-S-09**

This guaranty shall be executed by the successful bidder in accordance with Section 2.32 of the General Conditions. The bidder may execute the guaranty on this page at the time of submitting the bid or may, in the alternative, submit it with the insurance certificates and bonds within ten (10) days after award.

GUARANTY

To the Owner: County of Fresno


The undersigned guarantees the construction and installation of the following work included in this project:

ALL WORK

Should any of the materials or equipment prove defective or should the work as a whole prove defective, due to faulty workmanship, material furnished or methods of installation, or should the work or any part thereof fail to operate properly as originally intended and in accordance with the plans and specifications, due to any of the above causes, all within twelve (12) months after the date on which this contract is accepted by the Owner, the undersigned agrees to reimburse the Owner, upon demand, for its expenses incurred in restoring said work to the condition contemplated in said project, including the cost of any such equipment or materials replaced and the cost of removing and replacing any other work necessary to make such replacement or repairs, or, upon demand by the Owner, to replace any such material and to repair said work completely without cost to the Owner so that said work will function successfully as originally contemplated.

The Owner shall have the unqualified option to make any needed replacement or repairs itself or to have such replacements or repairs done by the undersigned. In the event the Owner elects to have said work performed by the undersigned, the undersigned agrees that the repairs shall be made and such materials as are necessary shall be furnished and installed within a reasonable time after the receipt of demand from the Owner. If the undersigned shall fail or refuse to comply with their obligations under this guaranty, the Owner shall be entitled to all costs and expenses reasonably incurred by reason of said failure or refusal.

Name (Printed): Eric Bower

Signature: 

Title: President

Date: 2/20/2025

Contractor: BMV Construction Group, Inc.

END OF SECTION

CONTRACT # 24-S-09

GENERAL CONDITIONS

2.01 IDENTIFICATION OF CONTRACT

- A. The Agreement shall be signed by the Contractor and the Owner.
- B. The Contract Documents are defined in ARTICLE II of the Agreement.
- C. The Contract Documents form the Contract for Construction ("Contract"). This Contract represents the entire and integrated agreement between the parties hereto and supersedes all prior negotiations, representations or agreements, either written or oral. The Contract may be amended or modified only by a Modification as defined above. The Contract Documents shall not be construed to create any contractual relationship of any kind between the Architect of record and the Contractor, but the Architect of record shall be entitled to performance of the obligations of the Contractor intended for their benefit and to enforcement thereof. Nothing contained in the Contract Documents shall create any contractual relationship between the Owner and any Subcontractor or Sub-subcontractor.

2.02 EXECUTION, CORRELATION, AND INTENT OF CONTRACT DOCUMENTS

- A. The Contract Documents are complementary and anything called for by one shall be supplied as if called for by all, providing it comes clearly within the scope of the Contract.
- B. The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work. Words and abbreviations that have well-known technical or trade meanings are used in the Contract Documents in accordance with such recognized meanings.
- C. Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become familiar with the local conditions under which the Work is to be performed, and has correlated personal observations with the requirements of the Contract Documents.
- D. All work and material shall be the best of the respective kinds specified or indicated. Should any workmanship or materials be required that are not directly or indirectly called for in the Contract Documents, but which nevertheless are necessary for proper fulfillment of the obvious intent thereof, said workmanship or materials shall be the same for similar parts that are detailed, indicated or specified, and the Contractor shall understand the same to be implied and provide for it in his/her tender as if it were particularly described or delineated.

2.03 OWNERSHIP AND USE OF DOCUMENTS

All Contract Documents and copies thereof furnished shall remain the property of the Owner. With the exception of one (1) contract set for each party to the Contract, such documents are to be returned by Contractor or suitably accounted for to the Owner upon request at the completion of the Work. Submission or distribution to meet official regulatory requirements or for other purposes in connection with the Project is not to be construed as publication in derogation of the Architect's common law copyright or other reserved rights. The Owner's use of the documents will not increase the Architect's design liability beyond the Project and the site for which the design was originally intended.

2.04 DEFINITIONS

The following words, or variations thereof, as used in these documents have meanings as defined:

- A. The Work – The Work comprises the completed construction required of the Contractor by the Contract Documents, and includes all labor, materials, equipment and services necessary to produce such construction, and all materials, other permits and equipment incorporated or to be incorporated in such construction.
- B. The Project – The collective improvements to be constructed by the Contractor pursuant to the construction of the Sheriff Substation, Vehicle/Evidence Storage building, parking, and associated site improvements for Fresno County.
- C. Owner – The County of Fresno, State of California, as represented by the Fresno County Board of Supervisors and so named in the Agreement. The term Owner additionally includes the Owner's authorized representative (also known as the Project Manager or Construction Manager) for this Project.
- D. Architect of record – The Owner and his/her authorized representative, as defined in Section 2.04C, or a duly California licensed Architect.
- E. Contractor – When used in the General Conditions refers to person(s) or entity (partnership or corporation) so named in Agreement and when used in the body of the Specifications, refers to the Contractor for that specific work, whether it be the General Contractor, Subcontractor, or other Contractor. The term Contractor means the Contractor or the Contractor's authorized representative.
- F. Subcontractor – Person, persons, entity, co-partnership or corporation having direct contract with Contractor to perform any of the Work at the site. The term Subcontractor means a Subcontractor or a Subcontractor's authorized representative. The term Subcontractor does not include any separate contractor or any separate contractor's subcontractors.

- G. Sub-subcontractor – Person, persons, entity, co-partnership or corporation having a direct or indirect contract with a Subcontractor to perform any of the Work at the site (i.e. a second-tier, third-tier or lower-tier Subcontractor). The term Sub-subcontractor means a Sub-subcontractor or an authorized representative thereof.
- H. Notice to Proceed – A written notice issued by the Owner directing the Contractor to proceed with construction activities to complete the Project.
- I. Technical Specifications – Contains the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.
- J. Days – All days shall be measured in calendar days unless specifically noted otherwise in these documents or referenced codes.
- K. Year – One year shall be measured in terms of 365 calendar days.

2.05 SPECIFICATIONS AND DRAWINGS

- A. Precedence – Anything mentioned in the Specifications and not shown on the Drawings, or shown on the drawings and not mentioned in the specifications, shall be of like effect as if shown or mentioned in both. Subject to Section 2.02, in cases of discrepancy concerning dimension, quantity and location, the Drawings shall take precedence over the Specifications. Explanatory notes on the Drawings shall take precedence over conflicting drawn indications. Large scale details shall take precedence over smaller scale details and figured dimensions shall take precedence over scaled measurement. Where figures are not shown, scale measurements shall be followed but shall in all cases be verified by measuring actual conditions of Work already in place. In cases of discrepancy concerning quality and application of materials and non-technical requirements over materials, the specifications shall take precedence over Drawings.
- B. Division of Specifications – For convenience of reference and to facilitate the letting of independent contracts, this specification may be separated into certain sections; such separation shall not operate to oblige the Owner, Architect or Professional Consultant to establish the limits of any contract between the Contractor and Sub-Contractor each of whom shall depend upon his/her own contract stipulations. The General Conditions apply with equal force to all work, including extra work.
- C. Governing Factors – Dimensions figured on drawings shall be followed in every case in preference to scale of drawings.

- D. Discrepancies – Should the Contractor, at any time, discover a discrepancy in a drawing or specification, or any variation between dimensions on drawings and measurements at site, or any lacking of dimensions or other information, he/she shall report at once to the Project Manager requesting clarification and shall not proceed with the work affected thereby until such clarification has been made. If the Contractor proceeds with work affected by such discrepancies, without having received such clarification, he/she does so at his/her own risk. Any adjustments involving such circumstances made by the Contractor, prior to approval by the Project Manager, shall be at the Contractor's risk and the settlement of any complications or disputes arising therefrom shall be at the Contractor's sole expense and Contractor shall indemnify, hold harmless and defend Owner, Owner's representatives, and Project Manager from any liability or loss with respect to said adjustments.
- E. Scope of Drawings – The drawings shall be held to determine the general character of the Work as well as its details. Parts not detailed shall be constructed in accordance with best standard practice for work of this class, so as to afford the requisite strength and logically complete the parts they compose. Where it is obvious that a drawing illustrates only a part of a given work or of a number of items, the remainder shall be deemed repetitious and so construed. The Contractor shall be responsible for all errors made in using any drawings which have been superseded.
- F. Shop Drawings, Product Data and Samples –
1. Shop Drawings are drawings, diagrams, schedules and other data specially prepared for the Work by the Contractor or any Subcontractor, manufacturer, supplier or distributor to illustrate some portion of the Work. Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams and other information furnished by the Contractor to illustrate a material, product or system for some portion of the Work. Samples are physical examples that illustrate materials, equipment or workmanship, and establish standards by which the work will be judged.
 2. The Contractor shall prepare, review, approve and submit to the Project Manager, with reasonable promptness and in such sequence as to cause no delay in the Work or in the work of the Owner or any separate contractor, all Shop Drawings, Product Data and Samples required by the Contract Documents.
 3. By preparing, approving and submitting Shop Drawings, Product Data and Samples, the Contractor represents that the Contractor has determined and verified all materials, field measurements and field construction criteria related thereto, or will do so with reasonable promptness, and has checked and coordinated the information contained within such submittals with the requirements of the Work, the Project, the Work Order and the Contract Documents.

4. The Contractor shall not be relieved of responsibility for any deviation from the requirements of the Contract Documents by the Architect's review of Shop Drawings, Product Data or Samples, unless the Contractor has specifically informed the Project Manager in writing of such deviation at the time of submission and the Architect has reviewed the specific deviation. The Contractor shall not be relieved from responsibility for errors or omissions in the Shop Drawings, Product Data or Samples by the Architect's review of them.
5. When professional certification of performance criteria of materials, systems or equipment is required by the Contract Documents, the Architect shall be entitled to rely upon the accuracy and completeness of such calculations and certifications. The cost of such certifications shall be borne by the Contractor. Owner may elect to have an independent certification performed at its own expense. The Owner shall have final approving authority for performance-based items.
6. The Contractor shall direct specific attention, in writing or on resubmitted Shop drawings, Product Data, or Samples, to revisions other than those requested by the Architect on previous submittals.
7. No portion of the Work requiring submission of a Shop Drawing, Product Data or Sample shall be commenced until the submittal has been reviewed by the Architect. All such portions of the Work shall be in accordance with reviewed submittals.
8. Submission of Shop Drawings and Samples to the Project Manager is required for only those items specifically mentioned in the Specification Sections. If Contractor submits Shop Drawings for items other than the above, the Project Manager will not be obligated to distribute or review them. Contractor shall be responsible for the procuring of Shop Drawings for his/her own use as he/she may require for the progress of the Work.
9. The term "Shop Drawings" as used herein also includes but is not limited to fabrication, erection, layout and setting drawings, manufacturer's standard drawings, descriptive literature, catalogs, brochures, performance and test data, wiring and control diagrams, all other drawings and descriptive data pertaining to materials, equipment, piping, duct and conduit systems, and methods of construction as may be required to show that the materials, equipment or systems and the positions and layout of each conform to the Contract requirements. As used herein the term "manufactured" applies to standard units usually mass-produced, and the term "fabricated" means items specifically assembled or made out of selected materials to meet individual design requirements. Shop Drawings shall establish the actual detail of all manufactured or fabricated items; indicate proper relation to adjoining work; amplify design details of mechanical and electrical equipment in proper relation to physical spaces in the structure; and incorporate minor changes of design or construction to suit actual conditions.

10. Drawings: Following Contractor's review and approval, Contractor shall submit to the Project Manager for approval four (4) minimum to six (6) maximum prints and/or PDF submission of the same information via email. (Required delivery methods and quantities of submittals will be determined at the time of the Pre-Construction Meeting.) The Project Manager will check the submittal to see if it is complete. If complete, the Project Manager will forward the drawings to the Owner and the Architect. The Architect and Owner will check the drawings and note Architect and Owner comments and affix a stamp to the drawings indicating the status of acceptance, and will return same to the Project Manager, each retaining prints for his/her records. The Architect or his/her consultants, as applicable, will review the Shop Drawings; mark the prints with required revisions; stamp the prints and indicate "No Exceptions Taken", "Make Corrections Noted", "Revise and Resubmit", "Submit Specified Item", or "Rejected", and return the prints. The Project Manager will return the prints to the Contractor. The Contractor shall then print and distribute the appropriate number of copies to his/her job personnel as required. If a drawing is stamped "Rejected" or "Revise and Resubmit", the Contractor shall correct and resubmit as outlined above. When stamped "Make Corrections Noted", or similar instructions, the Contractor shall correct and resubmit for record only, three (3) prints of each drawing. Also see Technical Specifications, Division I, General Requirements.
11. Samples: Following Contractor's review and approval, Contractor shall submit to the Architect, five (5) minimum samples of all materials in quantities and sizes as specified herein as requested by the Architect. Submittals shall be given to the Architect at a time determined by the Contractor, which allows for any necessary resubmittal and which will not cause any delay in the Work. Samples will be forwarded to the Architect. If a sample is stamped "Rejected" or "Revise and Resubmit", one sample so noted will be returned to the Contractor. The Contractor shall correct and resubmit as outlined above. If a sample is stamped "Make Corrections Noted", one sample so noted will be returned. Corrected samples shall be resubmitted for approval as per the original submittal. Also see Technical Specifications and General Requirements.
12. Brochures: Following Contractor's review and approval, Contractor shall submit to the Architect, five (5) copies of all manufacturer's catalogs or brochures as required. Brochures will be forwarded to the Architect for review. If a brochure is stamped "No Exception Taken", two (2) copies will be returned to the Contractor. If stamped "Rejected", one marked copy and two (2) unmarked copies will be returned. Corrected copies shall be resubmitted for approval as per the original submittal. Also see General Requirements.
13. Manufacturer's Instructions: Where any item or work is required by Specifications to be furnished, installed or performed in accordance with a specified product manufacturer's instructions, Contractor shall procure and distribute the necessary copies of such instructions to all concerned parties.

- G. Materials – All materials, unless otherwise specified, shall be new and of good quality, proof of which shall be furnished by the Contractor; in case of doubt as to kind or quality required, samples shall be submitted to the Architect through the Project Manager who will specify the kind and use of the material appropriate to the location and the function of the item in question. Contractor shall furnish such item accordingly. Before final payment, all material rejected by the Architect or Project Manager shall be promptly removed from the premises by the Contractor, whether or not completely installed, and promptly and properly replaced with correct materials, including any other work adjoining if disturbed, in accordance with the contract and without expense to the Owner; the Contractor also shall pay for work of other Contractors as is affected by such removals and replacements.

2.06 THE ARCHITECT

- A. The Owner may delegate all or a portion of its rights and responsibilities to a California licensed Architect as deemed necessary.
- B. The Architect advises the Project Manager in all aspects of the construction phase of the Project. The Architect's functions include advice and assistance to the Project Manager in the correct interpretation and application of the Contract Documents. The Architect is not authorized independently to issue Addenda, Clarifications, Field Orders, Work Authorizations, or Supplemental Work Orders, or in any other way to bind the Owner in discussions with the Contractor.
- C. The Contractor shall deliver all correspondence relating to the proper execution of the Work to the Project Manager. The Project Manager reserves the right to consult with the Architect and Owner prior to responding to the Contractor's correspondence.
- D. When discussions between the Contractor and the Project Manager occur either on the site or elsewhere, but the Architect is not present, the Project Manager reserves the right to consult with the Architect and Owner prior to issuing his/her final decision or instruction.
- E. The Architect shall review or take other appropriate action upon the Contractor's submittals such as Shop Drawings, Product Data and Samples, but only for conformance with the design concept of the Work and the information given in the Contract Documents. Such action shall generally be taken within ten (10) working days, however under certain circumstances such as very complex submittals or if large number of submittals are submitted at one time it may take longer. In this case the Contractor will be notified and given the opportunity to advise the Architect of priorities. The Architect's review of a specific item shall not indicate review of an assembly of which the item is a component.

2.07 THE PROJECT MANAGER

- A. The Project Manager is the authorized representative of the Owner in all aspects of administering the construction contract on behalf of the Owner. All communications from and to the Contractor will be channeled through the Project Manager. However, the Project Manager does not have the authority to bind the Owner in matters affecting adjustments to the time or cost of the Project as defined in the Agreement for Construction.
- B. The Project Manager will be the Owner's representative during the construction and warranty periods, and until final payment to all contractors is due. The Project Manager will advise and consult with the Owner. All instructions to the Contractor shall be forwarded through the Project Manager. The Project Manager will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents, unless otherwise modified by written instrument.
- C. The Project Manager will be on site during construction to monitor the progress and quality of the Work and to determine in general if the Work is proceeding in accordance with the Contract Documents. On the basis of on-site observations and communication with the Contractor, the Project Manager will keep the Owner informed of the progress of the Work, and will endeavor to guard the Owner against defects and deficiencies in the Work of the Contractor.
- D. The Project Manager shall at all times have access to the Work wherever it is in preparation and progress. The Contractor shall provide facilities for such access so that the Project Manager may perform its functions under the Contract Documents.
- E. Based on the Project Manager's observations, and an evaluation of the Contractor's Application for Payment, the Project Manager will determine the amount owing to the Contractor and will issue to the Owner Certificates for Payment incorporating such amount.
- F. The Project Manager will be the initial interpreter of the requirements of the Contract Documents and the initial judge of the performance hereunder by the Contractor. The Owner will have final authority of all such matters.
- G. The Project Manager will render interpretations necessary for the proper execution or progress of the Work, with reasonable promptness and in accordance with agreed upon time limits. Either party to the Contract may make written request to the Project Manager for such interpretations.
- H. Claims, disputes and other matters in question between the Contractor and the Project Manager relating to the execution or progress of the Work or the interpretation of the Contract Documents shall be referred to the Owner (or his/her designee).
- I. All interpretations and decisions of the Project Manager will be in writing or in graphic form, and shall be both consistent with the intent of the Contract Documents and reasonably inferable therefrom.

- J. The Project Manager will have the authority to reject, or recommend to the Owner the rejection, of any work that does not conform to the Contract Documents. Whenever, in the Project Manager's opinion, it is considered necessary or advisable for the implementation of the intent of the Contract Documents, the Project Manager will have authority to require special inspection or testing of the Work whether or not such work be then fabricated, installed or completed.
- K. The Project Manager will receive from the Contractor and review all Shop Drawings, Product Data and Samples, and forward same to Architect and Owner for review.
- L. Following consultation with the Owner, the Project Manager will take appropriate action on changes, and will have authority to order minor changes in the Work as provided herein.
- M. The Project Manager will conduct inspections to determine the date of Completion, and will receive and forward to the Owner for the Owner's review written warranties and related documents required by the Contract Documents and assembled by the Contractor. The Project Manager will issue a final Project Certificate for Payment upon compliance with the requirements for completion and final payment. The Project Manager will monitor the warranty for a period of 365 Calendar Days from and after the date of acceptance of the Work, unless otherwise specified as a longer term.
- N. The duties, responsibilities and limitations of authority of the Project Manager as the Owner's representative during construction, as set forth in the Contract Documents, will not be modified or extended without written consent of the Owner, the Contractor and the Project Manager, which consent shall not be unreasonably withheld. Failure of the Contractor to respond within ten (10) business days to a written request shall constitute consent by the Contractor.
- O. In case of the termination of the employment of the Project Manager, the Owner may appoint a successor Project Manager, whose status and duties under the Contract Documents shall be the same as those of the former Project Manager.

2.08 OWNER

- A. Information and Services Required of the Owner
 - 1. Unless otherwise provided in the Contract Documents, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for the construction, use or occupancy of permanent structures or for permanent changes in existing facilities.
 - 2. Information or services under the Owner's control shall be furnished by the Owner with reasonable promptness to avoid delay in the orderly progress of the Work.
 - 3. The Owner shall forward all instructions to the Contractor through the Project Manager.

B. Owner's Right to Stop the Work

If the Contractor fails to correct defective work as required by Section 2.42 herein or persistently fails to carry out the Work in accordance with the Contract Documents, the Owner, by a written order signed personally or by an agent specifically so empowered by the Owner in writing, may order the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, this right of the Owner to stop the Work shall not give rise to any duty on the part of the Owner to exercise this right for the benefit of any contractor or any other person or entity, except to the extent required by Section 2.12.C.

C. Owner's Right to Carry Out the Work

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents, and fails after written notice from the Owner to correct such default or neglect with diligence and promptness, the Owner may, after an additional written notice and without prejudice to any other remedy the Owner may have, make good such deficiencies. In such case an appropriate Contract Change Order shall be issued deducting from the payments then or thereafter due the Contractor the cost of correcting such deficiencies, including compensation for the additional services of the Architect or other professionals made necessary by such default, neglect or failure. Such action by the Owner and the amount charged to the Contractor are both subject to the prior approval of the Architect. If the payments then or thereafter due the Contractor are not sufficient to cover such amount, the Contractor shall pay the difference to the Owner, or Owner may require payment by the surety on the performance or warranty bonds as appropriate. Such action shall, in no way, affect the status of either party under contract, nor be held as a basis of any claim by the Contractor for damages or extension of time.

2.09 CONTRACTOR RESPONSIBILITIES

A. Review of Contract Documents and Field Conditions

1. The Contractor shall carefully study and compare the Contract Documents and shall at once report to the Project Manager any discrepancy or inconsistency that may be discovered. The Contractor shall not be liable to the Owner or the Project Manager for any damage resulting from any such inconsistencies or discrepancies in the Contract Documents unless the Contractor recognized such inconsistencies or discrepancies and knowingly failed to report it to the Project Manager. The Contractor shall perform no portion of the Work at any time unless authorized by the Contract Documents or, where required, approved Shop Drawings, Product Data or Samples for such portion of the Work.

2. Neither the Owner nor the Project Manager or Architect assume any responsibility for an understanding or representation made by any of their agents or representation prior to the execution of the Agreement unless (1) such understanding or representations are expressly stated in the Agreement, and (2) the Agreement expressly provides that responsibility therefor is assumed by the Owner.
3. Failure by the Contractor to acquaint himself/herself with all available information will not relieve him/her from responsibility for estimating properly the difficulty or cost of successfully performing the Work.
4. The Contractor shall take field measurements and verify field conditions and shall carefully compare such field measurements and conditions and other information known to the Contractor with the Contract Documents before commencing activities. Any inconsistencies or discrepancies discovered by the Contractor shall be reported to the Project Manager at once.
5. Before submitting any Request for Information (RFI), or other contractor-initiated request for information, the Contractor shall determine that the information requested is not clearly provided in the Contract Documents. RFI's shall be submitted to the Project Manager only from the Contractor, or Owner, and not from any subcontractor, supplier or other vendor, and shall be on a form approved by the Project Manager. The Contractor shall provide a revised and updated RFI Priority Schedule on a weekly basis. The RFI Priority Schedule shall rank RFI's in order of priority and include a brief statement of reason for priority. Owner initiated RFI's will not be listed on the Contractor's RFI Priority Schedule. The Owner will provide the Architect a separate list of Owner initiated RFI's upon request of the Architect. The Architect will endeavor to respect the order of priorities as requested by the Contractor or Owner for the overall benefit of the Project. The RFI process is for information and clarification only and may not be utilized to obtain approval for changes in Work Order Price or time. Also see Division 01 - General Requirements.

B. Supervision Procedures

1. The Contractor shall efficiently supervise and direct the Work, using therein the Contractor's best skill and diligence for which he/she is remunerated in the Contract Price. The Contractor shall carefully inspect the site and study and compare the Contract Documents, as ignorance of any phase of any of the features or conditions affecting the Contract will not excuse him/her from carrying out its provisions to its full intent.

2. The Contractor shall employ a competent superintendent and necessary assistants who shall be in attendance at the Project site during the progress of the Work. The superintendent shall represent the Contractor and all communications given to the superintendent shall be as binding as if given to the Contractor. Important communications shall be confirmed in writing. Other communications shall be so confirmed upon written request in each case. The Superintendent who begins the Project shall remain on the Project until the Project is completed, as long as the Contractor employs that person. The Superintendent shall not be replaced without the approval of the Owner.
3. The Contractor shall be responsible to the Owner for the acts and omissions of his/her employees, subcontractors and their agents and employees, and other persons performing any of the Work under a contract with the Contractor.
4. The Contractor shall at all times enforce strict discipline and good order among his/her employees and shall not employ on the Work any unfit person or anyone not skilled in the task assigned to him/her.
5. The Contractor shall not be relieved from his/her obligations to perform the Work in accordance with the Contract Documents either by the activities or duties of the Owner or the Architect in his/her administration of the Contract, or by inspections, tests or approvals required or performed by persons other than the Contractor.
6. Contractor shall alert and inform their employees that State law requires that the identities of inmates/wards/patients/clients be kept confidential. Revealing the identities of inmates/wards/patients/clients is punishable by law.

C. Construction Procedures

1. Means and Methods – The Contractor shall be solely responsible for and control of construction means, methods, techniques, sequences, coordination and procedures for all the Work of this contract. Additionally, the Contractor shall be responsible for safety precautions and programs in connection with the Work.
2. Laws of County and State – The Contractor must comply with all laws, rules, regulations, provisions and ordinances of the County in which the Work is being done, and all State laws pertaining to the Work.
3. Safeguards – The Contractor shall provide, in conformity with all local codes and ordinances and as may be required, such temporary walls, fences, guard-rails, barricades, lights, danger signs, enclosures, etc., and shall maintain such safeguards until all work is completed.

4. Housekeeping – Contractor shall keep the premises free of excess accumulated debris. Clean up as required and as directed by the Project Manager. At completion of work all debris shall be removed from the site. Refer to General Requirements for additional requirements.
5. Labor and Materials – Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for all labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for the proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.
6. The Contractor shall deliver to the Project Manager, prior to final acceptance of the Work as a whole, signed certificates from suppliers of materials and manufactured items stating that such items conform to the Contract Documents.
7. The Contractor, immediately upon receipt of the Notice to Proceed (or where shop drawings, samples, etc., are required, immediately upon receipt of review thereof), shall place orders for all materials, work fabrication, and/or equipment to be employed by him/her in connection with that portion of the contracted Work. The Contractor shall keep all materials, work fabrications and/or equipment specified and shall advise the Project Manager promptly, in writing, of all orders placed and of such materials, work fabrications and/or equipment which may not be available in a timely manner for the purposes of the Contract.
8. Any worker whose work is unsatisfactory to the Owner or the Architect, or are considered by the Owner or Architect to be careless, incompetent, unskilled or otherwise unfit, shall be dismissed from work under the Contract upon written request to the Contractor from the Owner or the Architect.
9. Temporary Facilities – Contractor may connect to existing water and electricity available on the site, provided it is suitable to the Contractor's requirements. Water and electricity used will be paid by the Owner. Contractor shall bear all expenses for carrying the water or electricity to the appropriate locations and to connect or tap into existing lines. Toilet facilities may be available on a site to the workmen engaged in the performance of this contract. It shall be the responsibility of the Contractor to confirm with the Owner the availability of toilet facilities on the site. The use of such facilities may be revoked in the event of excess janitorial requirements.
10. Contractor shall not perform any fire hazardous operation adjacent to combustible materials. Any fire hazardous operation shall have proper fire extinguisher close by and the adjacent area shall be policed before stopping work for the day. Contractor shall provide not less than one OSHA/NFPA Class 6-ABC fire extinguisher for each 9,000 square feet of Project area or fraction thereof.

11. Contractor shall erect temporary dust separation partitions and floor mats as necessary to confine dust and debris within area of work. Contractor shall post signs, erect and maintain barriers and warning devices for the protection of the general public and Owner personnel.
12. Trenching and Excavation – In accordance with Section 7104 of the California Public Contract Code, the following provisions shall apply to any contract involving digging of trenches or other excavations that extend deeper than four (4) feet below the surface:
 - a. The Contractor shall promptly, and before the following conditions are disturbed, notify the Owner, in writing, of any:
 - i. Material that the Contractor believes may be material that is hazardous waste, as defined in Section 25117 of the Health and Safety Code that is required to be removed to a Class I, Class II, or Class III disposal site in accordance with provisions of existing law.
 - ii. Subsurface or latent physical conditions at the Project site differing from those indicated by information about the site made available to bidders prior to the deadline for submitting bids.
 - iii. Unknown physical conditions at the site of any unusual nature, different materially from those ordinarily encountered and generally recognized as inherent in work of the character provided for in the contract.
 - b. The Owner shall promptly investigate the conditions, and if it finds that the conditions do materially so differ, or do involve hazardous waste, and cause a decrease or increase in the Contractor's cost of, or the time required for, performance of any part of the work, shall issue a Contract Change Order in accordance with the provisions of Section 2.09 of the General Conditions.
 - c. In the event that a dispute arises between the Owner and the Contractor whether the conditions materially differ, or involve hazardous waste, or cause a decrease or increase in the Contractor's cost of, or time required for, performance of any part of the work, the Contractor shall not be excused from any scheduled completion date provided for by the contract, but shall proceed with all work to be performed under the contract. The Contractor shall retain any and all rights provided either by contract or by law which pertain to the resolution of disputes and protests between the contracting parties.

2.10 SUBCONTRACTORS

- A. Agreements – Agreements between the Contractor, Subcontractors, and Subcontractors of lower tier shall be subject to the approval of the Owner, but in no case does such approval relieve the Contractor of any conditions imposed by the Contract Documents. The Contractor shall only use those subcontractors that are required to be listed and included in his/her sealed bid Subcontractor List, section 004336, unless any proposed substitution is first approved by the Owner pursuant to statute. The Contractor shall not use any subcontractor who is ineligible to perform work on a Public Works Project pursuant to section 1777.1 or 1777.7 of the Labor Code. Notwithstanding any other provision of the Contract Documents, subcontractors may be added, deleted or substituted only in accordance with the provisions of Public Contract Code Section 4100 et seq.
- B. Relation with Subcontractor – By an appropriate agreement, written where legally required for enforceability, the Contractor shall bind every Subcontractor and require therein that every Subcontractor agrees to be bound by the terms of the Contract Documents to carry out their provisions insofar as applicable to their work; and the Contractor further agrees to pay to each Subcontractor promptly upon issuance of Certificate of Payment, his/her or their due portion. Said agreement shall preserve and protect the rights of the Owner and the Architect under the Contract Documents with respect to the work to be performed by the Subcontractor so that the subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the Contractor-Subcontractor Agreement, the benefit of all rights, remedies and redress against the Contractor that the Contractor, under the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with their Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the Subcontract, copies of the Contract Documents to which the Subcontractor will be bound by this Paragraph and identify to the Subcontractor any terms and conditions of the proposed Subcontract which may be at variance with the Contract Documents. Each Subcontractor shall similarly make copies of Contract Documents available to their Sub-subcontractors. Nothing contained herein shall be deemed to create an agency relationship between the Owner and any Subcontractor or material supplier.
- C. Owner's Relation – Neither the acceptance of the name of Subcontractor nor the suggestion of such name nor any other act of the Owner or Architect nor anything contained in any Contract Document is to be construed as creating any contractual relation between the Owner (or Owner's authorized representatives) and any Subcontractor of any tier nor as creating any contractual relation between the Architect and any Subcontractor of any tier.
- D. All Subcontractors employed by the Contractor shall be appropriately licensed in conformity with the laws of the State of California.

- E. Jurisdictional disputes between Subcontractors or between Contractor and Subcontractor shall not be mediated or decided by the Owner or the Architect. The Contractor shall be responsible for the resolution of all such disputes based upon his/her contractual relationship with his/her Subcontractors.

2.11 OWNER'S RIGHT TO PERFORM WORK AND TO AWARD SEPARATE CONTRACTS

- A. The Owner reserves the right to perform work related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project or other work on the site under these or similar Conditions of the Contract. If the Contractor claims that the Owner's action results in delay, damage or additional cost attributable thereto, the Contractor shall make such claim as provided elsewhere in the Contract Documents.
- B. When separate contracts are awarded for different portions of the Project or other work on the site, the term Contractor in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.
- C. The Owner shall provide for coordination of the activities of the Owner's own forces and of each separate contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with other separate contractors and the Owner in reviewing their construction schedules when directed to do so. The Contractor shall make any revisions to the construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, separate contractors, and the Owner, until subsequently revised.
- D. Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces, the Owner shall be deemed to be subject to the same obligations and to have the same rights which apply to the Contractor under the Conditions of the Contract.

2.12 MUTUAL RESPONSIBILITY

- A. The Contractor shall afford the Owner and separate contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

- B. When any part of the Contractor's Work depends upon proper execution or results of the work of the Owner or any separate contractor, the Contractor shall, prior to proceeding with the Work, promptly report to the Project Manager any apparent discrepancies or defects in such other work that render it unsuitable for such proper execution and results. Failure of the Contractor so to report shall constitute an acceptance of the Owner's or separate contractor's work as fit and proper to receive the Work, except as to defects which may subsequently become apparent in such work by others.
- C. If, following the reporting of any discrepancy or defect as required herein above, the Contractor suffers damage due to disruption or delay caused by the separate contractor, without fault by the Owner, the Contractor's remedy shall be limited to seeking recovery from the separate contractor.
- D. Any costs caused by defective or ill-timed work shall be borne by the Contractor responsible therefor.
- E. Should the Contractor cause damage to the work or property of the Owner, or to other work or property on the site, the Contractor shall promptly remedy such damage as provided herein.
- F. Should the Contractor wrongfully delay or cause damage to the work or property of any separate contractor, the Contractor shall, upon due notice, promptly attempt to settle with such other contractor by agreement, or otherwise to resolve the dispute. If such separate contractor sues the Owner on account of any delay or damage alleged to have been caused by the Contractor, the Owner shall notify the Contractor who shall defend such proceedings, and if any judgment or award against the Owner (or Owner's authorized representatives) arises therefrom, the Contractor shall pay or satisfy such judgment or award in full and shall reimburse the Owner for all costs which the Owner has incurred in connection with such matter.

2.13 OWNER'S RIGHT TO CLEAN UP

If a dispute arises between the Contractor and separate contractors as to their responsibility for cleaning up as required in the Contract Documents, the Owner may clean up and the contractor responsible shall pay Owner such portions of the cost as the Project Manager shall determine to be just.

2.14 GOVERNING LAW

The Contract shall be governed by the law of the State of California.

2.15 INSPECTION

- A. All material and workmanship (if not otherwise designated by the Contract Documents) shall be subject to inspection, examination, and test by the Owner and Project Manager at any and all times during manufacture and/or construction and at any and all places where such manufacture and/or construction are carried on. The Owner and Project Manager shall have the right to reject defective material and workmanship or require its correction.
- B. The Contractor shall furnish promptly without additional charge, all reasonable facilities, labor, and materials necessary for the safe and convenient inspection and tests that may be required by the Owner and Project Manager.
- C. Where the Contract Documents, instructions by the Owner, laws, ordinances, or any public authority having jurisdiction requires work to be inspected, tested or approved before work proceeds, such work shall not proceed, nor shall it be concealed prior to inspection.
- D. The Contractor shall give the Project Manager at least two (2) business days advance notice of the readiness for any Contract compliance inspection by the Inspector. The Contractor shall give notice as required by all other inspecting and testing agencies of jurisdiction for Code and regular compliance inspection. In all cases, the Contractor shall schedule inspections so as not to delay the Work.
- E. If the Project Manager determines that any work requires additional special inspection beyond that identified in the specifications, the Project Manager will, upon written authorization from the Owner, instruct the Contractor to order such special inspection, testing or approval, and the Contractor shall give notice as provided above. If such special inspection or testing reveals a failure of the Work to comply with the requirements of the Contract Documents, the Contractor shall bear all costs thereof, including compensation for the Project Manager's additional services, testing or inspections made necessary by such failure; otherwise the Owner shall bear such costs, and an appropriate Contract Change Order shall be issued.
- F. Should it be considered necessary or advisable by the Project Manager at any time, either before acceptance of the entire Work, or after acceptance and within the guaranty period, to make an examination of work already completed, by removing or tearing out same, the Contractor shall on request promptly furnish all necessary facilities, labor, and material. If such work is found to be defective in any material respect, due to the fault of the Project Manager or his/her Subcontractors, he/she shall defray all the expenses of such examination and of satisfactory reconstruction. If, however, such work is found to meet the requirements of the contract, any compensation deemed appropriate shall be handled by issuance of a Contract Change Order to the Contractor and he/she shall, in addition, if completion of the work has been delayed thereby, be granted a suitable extension of time on account of the additional work involved.
- G. Required certificates of inspection, testing, or approval shall be secured by the Contractor and the Contractor shall promptly deliver them to the Project

Manager for review and evaluation of compliance with the appropriate specifications and standards.

- H. When the work is completed, the Contractor shall notify the Project Manager in writing that the work will be ready for final inspection and test on a definite date, which shall be stated in such notice.

2.16 TAXES, PERMITS, FEES, AND INDEMNIFICATION FOR PATENT INFRINGEMENT CLAIM

- A. The Contractor shall pay for and include all Federal, State, and local taxes direct or indirect for the work or portions thereof provided by the Contractor which are legally enacted at the time the Notice to Proceed is issued, whether or not yet enacted, and secure and pay all fees and charges for permits and licenses, unless otherwise specified.
- B. Royalty and license fees incidental to the use of any patented material, device, or process shall be paid by the Contractor and in the event of a claim of alleged infringement of patent copyright, or Trade Secret rights, the Contractor shall indemnify, save the Owner (and Owner's authorized representatives) free and harmless, and defend, at the Contractor's own expense, any and all suits that may be brought in such connection.
- C. Unless otherwise provided in the Contract Documents, the Owner shall secure and pay for the building permit, permanent utility connection fees, and right-of-way encroachment permit. The Contractor shall secure and pay for temporary construction utilities, and all other permits and governmental fees, licenses, and inspections necessary for the proper execution and completion of the Work.
- D. The Contractor shall give all notices and comply with all laws, ordinances, rules, regulations, and lawful orders of any public authority bearing on the performance of the Work.
- E. It is not the responsibility of the Contractor to make certain that the Contract Documents are in accordance with applicable laws, statutes, building codes and regulations. If the Contractor observes that any of the Contract Documents are at variance therewith in any respect, the Contractor shall promptly notify the Project Manager in writing, and any necessary changes shall be accomplished by appropriate Modification.
- F. If the Contractor performs any work knowing it to be contrary to any laws, ordinances, rules, and regulations, without notice to the Project Manager, the Contractor shall assume full responsibility therefor and shall bear all costs attributable thereto.
- G. Any reference in the Contract Documents to codes, standard specifications, or manufacturer's instructions, shall mean the latest printed edition of each in effect at the Contract date.

2.17 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Within thirty (30) calendar days after receipt of Notice to Proceed, the Contractor shall submit a Construction Schedule in CPM (Critical Path Method) form to the Project Manager for approval. The Construction Schedule shall be sufficiently detailed to accurately depict all the work required by the Contract. CPM Construction Schedule shall reflect shop drawings; submittals due and return dates, fabrication and delivery times, cost loading, crew mix, and equipment loading data. The Contractor shall thereafter adhere to the Construction Schedule, as updated monthly, or as necessary in accordance with the Contract Documents, including any scope changes or changes in the work approved by the Owner during the course of construction. "Slack" or "float" time on the CPM Construction Schedule is not intended, and shall not be, for the sole benefit of either the Owner or Contractor.
- B. Within fourteen (14) calendar days after the pre-construction conference, the Contractor shall provide a Submittal and Procurement Schedule indicating time periods for review of Shop Drawings, Data, Samples, and procurement of material and equipment required for the Work. Contractor shall allow time for submittal review in accordance with the General Requirements Section – Construction Progress Documentation. All items that require review by the Project Manager and/or are not readily available from stock and requiring more than thirty-five (35) days lead-time shall be included in the Submittal and Procurement Schedule. Items listed in the Submittal and Procurement Schedule shall also be identified as activities on the CPM Construction Schedule. Contractor shall identify items requiring coordination with work of separate contractors. The working day to calendar date correlation shall be based upon the Contractor's proposed work week with adequate allowance for legal holidays, days lost due to abnormal weather, and any special requirements of the Project.
- C. The Construction Schedule shall be prepared and maintained by the Contractor.
- D. The Owner, Project Manager, Contractor, and other Contractor(s) shall jointly review the progress of the work weekly. Should this review, in the opinion of the Project Manager, indicate that the work is behind the schedule established by currently reviewed Construction Schedule, the Contractor shall either (a) provide a plan to the Project Manager indicating the steps the Contractor intends to take in order to recover the time behind schedule and conform to the reviewed Construction Schedule; or (b) submit a revised Construction Schedule for completion of the work, remaining within the contract completion time, to the Project Manager for review by the next weekly meeting. If the Contractor's recovery or revised schedule requires work to occur during other than normal working hours, the Contractor will be responsible for any resulting costs incurred by the Owner, including but not limited to, the costs for construction management, contract administration, inspection, testing, and staffing.

- E. The Contractor shall deliver copies of his/her daily job logs to the Project Manager and Owner on a weekly basis or as otherwise agreed to by Owner. At a minimum, the Contractor's daily job log should include the sub-contractors working onsite, number of workers and their trade classification, description of work, visitors, temperature and weather conditions, accidents, delays, and any other important information pertaining to the Project that day. The Contractor will schedule and coordinate the Work of all sub-contractors on the Project. The Contractor will keep the Sub-contractors informed of the Construction Schedule to enable the Contractor to plan and perform the Work properly.

2.18 RECORDS, DOCUMENTS, AND SAMPLES AT THE SITE

- A. The Contractor shall maintain all records of required Review Agencies, County, or State inspections, and shall promptly notify the Project Manager of the results of any inspection. Copies of all such records shall be provided to the Owner.
- B. The Contractor shall secure and maintain required certificates of inspection, testing, or approval and shall promptly deliver them to the Project Manager.
- C. The Contractor shall maintain at the Project site, on a daily basis, one (1) record copy of all Drawings, Specifications, Addenda, Change Orders, and other Modifications, in good order and marked currently to record all changes made during construction, and reviewed Shop Drawings, Product Data, and Samples. These shall be available to the Project Manager and the Owner and reviewed weekly, and shall be delivered to the Project Manager for forwarding to the Owner upon completion of the Project. The Contractor shall advise the Project Manager on a current basis of all changes in the Work made during construction. Payment may be withheld from Contractor for failure to maintain current Record Documents.

2.19 USE OF SITE

- A. The Contractor shall confine operations at the site to areas permitted by law, ordinances, permits, and the Contract Documents, and shall not unreasonably encumber the site with any materials or equipment.
- B. The Contractor shall coordinate all of the Contractor's operations with, and secure approval from, the Project Manager before using any portion of the site. Also see Technical Specifications, Division 01, General Requirements.

2.20 CUTTING AND PATCHING OF WORK

- A. The Contractor shall be responsible for all cutting, fitting, or patching that may be required to complete the Work or to make its several parts fit together properly.

- B. The Contractor shall not damage or endanger any portion of the Work or the work of the Owner, or any separate contractors by cutting, patching, or otherwise altering any work, or by excavation. The Contractor shall not cut or otherwise alter the work of the Owner or any separate contractor except with the written consent of the Owner and of such separate contractor. The Contractor shall not unreasonably withhold from the Owner or any separate contractor consent to cutting or otherwise altering the Work.
- C. The Contractor in all cases shall exercise extreme care in any cutting operations, and perform such operations under adequate supervision by competent mechanics skilled in the applicable trade. Openings shall be neatly cut and shall be kept as small as possible to avoid unnecessary damage. Careless and/or avoidable cutting damage, etc., will not be tolerated, and the Contractor will be held responsible for such avoidable or willful damage.
- D. All replacing, patching, and repairing of all materials and surfaces cut or damaged in the execution of the Work shall be performed by experienced mechanics of the several trades involved. All work of such nature shall be done with the applicable materials, in such a manner that all surfaces so replaced, repaired, or patched, will, upon completion of the Work, match the surrounding similar surfaces.

2.21 CLEANING UP

- A. The Contractor shall at all times keep the premises free from accumulation of waste materials or rubbish caused by the Contractor's operations. At the completion of the Work, the Contractor shall remove all the Contractor's waste materials and rubbish from and about the Project as well as all the Contractor's tools, construction equipment, machinery and surplus materials.
- B. If the Contractor fails to clean up at the completion of the Work, the Owner may do so, and the cost thereof shall be paid by the Contractor.

2.22 INDEMNIFICATION

- A. To the fullest extent permitted by law, Contractor agrees to and shall indemnify, save, hold harmless and at Owner's request, defend Owner and its officers, agents and employees, and the Architect and Consultants and their respective officers, agents and employees, from any and all costs and expenses, attorney fees and court costs, damages, liabilities, claims and losses occurring or resulting to Owner, the Architect or Consultants in connection with the performance, or failure to perform, by Contractor, its officers, agents or employees under this Agreement, and from any and all costs and expenses, attorney fees and court costs, damages, liabilities, claims and losses occurring or resulting to any person, firm or corporation who may be injured or damaged by the performance, or failure to perform, of Contractor, its officers, agents or employees under this Agreement. In addition, Contractor agrees to indemnify Owner for Federal, State of California and/or local audit exceptions resulting from non-compliance herein on the part of Contractor.

- B. In any and all claims against the Owner, the Architect or Consultants, or any of their respective officers, agents or employees, initiated by any employee of the Contractor, any Subcontractor, anyone directly or indirectly employed by any of them or anyone for whose acts any of them may be liable, the indemnification obligation set forth in the immediately preceding paragraph shall not be limited in any way by any limitation on the amount or type of damages, compensation or benefits payable by or for the Contractor or any Subcontractor under workmen's compensation acts, disability benefit acts or other employee benefit acts.

2.23 FAIR EMPLOYMENT PRACTICES CLAUSE

Nondiscrimination: In connection with the performance of Work under the contract, the Contractor agrees (as prescribed in Chapter 6 of Division 3 of Title II of the Government Code of the State of California, commencing at Section 12900 and by Labor Code Section 1735) not to discriminate against any employee or applicant for employment because of race, religious creed, color, national origin, ancestry, physical disability, mental disability, medical condition, marital status, or sex. The aforesaid provisions shall include, but not be limited to, the following: employment, upgrading, demotion or transfer, recruitment or recruitment advertising, layoff or termination, rates of pay or other forms of compensation, and selection for training, including apprenticeship. The Contractor agrees to post hereafter in conspicuous places, available for employees and applicants for employment, Notices to be provided by the County, setting forth the provisions of this discrimination clause. The Contractor further agrees to insert the foregoing provisions in all subcontracts hereunder, except subcontracts for standard commercial supplies of raw materials.

2.24 PAYMENT

A. CONTRACT SUM

The Contract Sum is stated in the Owner-Contractor Agreement ("the Agreement"), Section 005213, and, including authorized adjustments thereto, is the total amount payable by the Owner to the Contractor for the performance of the Work under the Contract Documents.

B. SCHEDULE OF VALUES

Before the first Application for Payment, and within eight (8) days of the bid opening, the Contractor shall submit to DesignServices@fresnocountyca.gov a Schedule of Values allocated to the various portions of the Work, prepared in such form and supported by such data to substantiate its accuracy as the Project Manager may require. This schedule, unless objected to by the Project Manager, shall be used only as a basis for the Contractor's Applications for Payment.

C. APPLICATIONS FOR PAYMENT

The Owner will make progress payments to the Contractor upon completion of portions of the Work, as covered by the Contract Documents, in accordance with established Owner procedures. Before submitting an Application for Payment (Final or Partial), the Contractor shall reach an agreement with the Project Manager (in consultation with the Architect) concerning the percentage complete of the Work and the dollar value for which the Application for Payment may be submitted.

1. On or about the twentieth (20th) day of the month in which the work was performed, the Contractor shall submit to the Project Manager an itemized Application for Payment, notarized if required, supported by such data substantiating the Contractor's right to payment as the Owner or the Project Manager may require, including appropriate updates to the Construction Schedule, and reflecting retainage, if any, as provided elsewhere in the Contract Documents. Payment is expressly conditioned upon submission by the Contractor of conditional and unconditional waivers and release of lien rights upon progress payment as the Owner or the Architect may require. Waiver and Release forms must be submitted on forms approved by the Owner. Copies of said forms shall comply with Civil Code Section 8132 through 8138, inclusive.
2. Unless otherwise provided in the Contract Documents, payments may be made on account of materials or equipment not incorporated in the Work but delivered and suitably stored at the site and, if approved in advance by the Owner, payments may similarly be made for materials or equipment suitably stored at some other location agreed upon in writing. Payments for materials or equipment stored on or off the site shall be conditioned upon submission by the Contractor of bills of sale or such other procedures satisfactory to the Owner to establish the Owner's title to such materials or equipment or otherwise protect the Owner's interest, including applicable insurance and transportation to the site for those materials and equipment stored off the site.
3. The Contractor warrants that title to all work, materials, and equipment covered by an Application for Payment will pass to the Owner either by incorporation in the construction or upon receipt of payment by the Contractor, whichever occurs first, free and clear of all liens, stop notices, claims, security interest or encumbrances, hereinafter referred to as "liens"; and that no work, materials or equipment covered by an Application for Payment will have been acquired by the Contractor, or by any other person performing work at the site or furnishing materials and equipment for the Project, subject to an agreement under which an interest therein or an encumbrance thereon is retained by the seller or otherwise imposed by the Contractor or such other person.
4. On or about the twentieth (20th) day of the month following the month in which the work was performed, the Owner shall pay to the Contractor ninety-five percent (95%) of the value of said work in place, as checked and approved by the Project Manager. The balance of five percent (5%) of the estimate shall be retained by the Owner until the time of

final acceptance of said work. In lieu of the five percent (5%) retainage, the Contractor may substitute securities as provided herein below.

- a. If the Owner does not pay the Contractor within thirty (30) days after receipt of an undisputed and properly submitted payment request for a progress payment, excluding that portion of the final payment designated by the contract as retention earnings, then the Owner shall pay interest to the Contractor as provided by Public Contract Code Section 20104.50. Said interest penalty is the sole recourse of Contractor and Contractor shall have no right to stop the Work until payment of the amount owing has been received, nor shall the contract completion time be extended, nor shall the Contract Sum be increased in any way, including by reason of any costs incurred by Contractor, except to the extent of said interest payment.
 - b. Pursuant to Public Contract Code Section 7107, in the event of a dispute between the Owner and Contractor, the Owner may withhold from the final payment an amount not to exceed one hundred and fifty percent (150%) of the disputed amount. Except as so provided, the Owner shall release the retention withheld within sixty (60) days after the date of completion of the Work, as "completion" is defined in Public Contract Code Section 7107. In the event that retention payments are not made within the time periods required by Public Contract Code Section 7107, the Owner may be subject to the interest provisions of Public Contract Code Section 7107.
5. Security Substitutions and Escrow for Moneys Withheld to Insure Contractor's Performance. Pursuant to Public Contract Code section 22300, the Contractor may deposit in an escrow, equivalent securities for any moneys withheld to ensure performance and have said moneys paid directly to Contractor, or, in the alternative, have the Owner deposit such moneys directly into an escrow. Upon the closing of any such escrow, Contractor shall pay to each Subcontractor, not later than twenty (20) days after receipt of the closing payment, the respective amount of interest earned, net of costs attributed to retention withheld from each Subcontractor, on the amount of retention withheld to insure the performance of the Contractor. Any escrow established pursuant to this article shall be with a state or federally chartered bank, shall be at the sole expense of the Contractor, and shall be established using an escrow agreement in substantially the following form:

(Begin Escrow Agreement)

ESCROW AGREEMENT FOR SECURITY DEPOSITS IN LIEU OF RETENTION

This Escrow Agreement is made and entered into by and between the County of Fresno, (hereinafter called "Owner"), _____, (hereinafter called "Contractor"); and _____, a state or federally chartered bank in California, (hereinafter called "Escrow Agent").

For the consideration hereinafter set forth, the Owner, Contractor, and Escrow Agent agree as follows:

1. Pursuant to Section 22300 of the Public Contract Code of the State of California, Contractor has the option to deposit securities with Escrow Agent as a substitute for retention earnings required to be withheld by Owner pursuant to the Construction Contract entered into between the Owner and Contractor for _____ in the amount of \$_____, and dated _____ (hereinafter referred to as the "Contract"). Alternatively, on written request of the Contractor, the Owner shall make payments of the retention earnings directly to the Escrow Agent. When Contractor deposits the securities as a substitute for Contract earnings, the Escrow Agent shall notify the Owner within ten (10) days of the deposit. The market value of the securities at the time of the substitution, as valued by the Owner, shall be at least equal to the cumulative total cash amount then required to be withheld as retention under the terms of the contract between Owner and Contractor. If the Owner determines that the securities are not adequate, it will notify Contractor and Escrow Agent, and Contractor shall deposit additional security as further determined by the Owner. Securities shall be held in the name of the Owner and shall designate the Contractor as the beneficial owner.
2. Securities eligible for investment under subdivision (c) of the above-referenced Section 22300 shall include those listed in Section 16430 of the Government Code, and shall also include bank or savings and loan certificates of deposit, interest-bearing demand deposit accounts, and standby letters of credit. Deposit of any other type of security may be permitted only by mutual agreement of the Contractor and the Owner, evidenced by an amendment to this agreement executed by all of the parties hereto.
3. Upon the deposit of adequate securities, Owner shall make progress payments to the Contractor for such funds which otherwise would be withheld from progress payments pursuant to the Contract provisions.
4. When the Owner, at Contractor's written request, makes payment of retentions earned directly to the Escrow Agent, the Escrow Agent shall hold them for the benefit of the Contractor until such time as the escrow created under this contract is terminated. The Contractor may direct the investment of the payments into securities. All terms and conditions of this agreement and the rights and responsibilities of the parties shall be equally applicable and binding when the Owner pays the Escrow Agent directly.

5. Contractor shall be responsible for paying all fees for the expenses incurred by Escrow Agent in administering the Escrow Account and all expenses of the Owner. The Owner, Contractor, and Escrow Agent shall determine these expenses and payment terms.
6. The interest earned on the securities, or the money market accounts held in escrow, and all interest earned on that interest, shall be for the sole account of Contractor and shall be subject to withdrawal by Contractor at any time and from time to time without notice to the Owner.
7. Contractor shall have the right to withdraw all or any part of the principal in the Escrow Account only by written notice to Escrow Agent accompanied by written authorization from Owner to the Escrow Agent that Owner consents to the withdrawal of the amount sought to be withdrawn by Contractor.
8. The Owner shall have the right to draw upon the securities or any amount paid directly to Escrow Agent in the event of default by the Contractor. Upon seven (7) days written notice to the Escrow Agent from the Owner of the default, the Escrow Agent shall immediately convert the securities to cash and shall distribute the cash, including any amounts paid directly to Escrow Agent, as instructed by the Owner. Escrow Agent shall not be concerned with the validity of any notice of default given by Owner pursuant to this paragraph, and shall promptly comply with Owner's instructions to pay over said escrowed assets. Escrow Agent further agrees not to interplead the escrowed assets in response to conflicting demands and hereby waives any present or future right of interpleader.
9. Upon receipt of written notification from the Owner certifying that the Contract is final and complete, and that the Contractor has complied with all requirements and procedures applicable to the Contract, Escrow Agent shall release to Contractor all securities and interest on deposit less escrow fees and charges of the Escrow Account. The escrow shall be closed immediately upon disbursement of all moneys and securities on deposit and payment of fees and charges.
10. Escrow Agent shall rely on the written notifications from the Owner and Contractor pursuant to Sections (6), (7), (8), and (9) of this Agreement and the Owner and Contractor shall hold Escrow Agent harmless from Escrow Agent's release and disbursement of the securities and interest as set forth above.
11. The venue of any litigation concerning the rights and obligations of the parties to this agreement shall be the County of Fresno and the parties hereto waive the removal provisions of Code of Civil Procedure Section 394.
12. The names of the persons who are authorized to give written notice or to receive written notice on behalf of the Owner and on behalf of Contractor in connection with the foregoing, and exemplars of their respective signatures are as follows:

On behalf of Owner:

Title – **Business Manager**

Name – **Lemuel Asprec**

Signature _____

Address: **2220 Tulare St, 6th Floor
Fresno, CA 93721**

On behalf of Contractor:

Title

Name

Signature _____

Address:

On behalf of Escrow Agent:

Title

Name

Signature

Address

At the time the Escrow Account is opened, the Owner and Contractor shall deliver to the Escrow Agent a fully executed counterpart of this Agreement

IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above.

Owner:

Title – **Director, Department of Public
Works and Planning**

Name – **Steven E. White**

Signature _____

Address – **2220 Tulare St, 6th Floor
Fresno, CA 93721**

Contractor:

Title

Name

Signature _____

Address

Escrow Agent:

Title

Name

Signature

Address

(End Escrow Agreement)

6. Itemized Breakdown: The Contractor shall submit a financial breakdown of the work, itemized by crafts or sections as designated by the Owner. The Contractor's payment shall be based upon the monthly percentage of completion of these items.
7. Lien Waivers: The Owner may require the Contractor to submit, along with the progress payment request, notarized lien waivers from each Subcontractor, materials, or equipment supplier. Lien waivers shall comply with Civil Code Section 8132, et seq., and the aggregate sum thereof shall reflect all progress payments previously made.

D. CERTIFICATES FOR PAYMENT

1. The Project Manager shall, within seven (7) days after the receipt of the Project Application for Payment, review the Project Application for Payment and either issue a Project Certificate for Payment to the Owner for such amounts as the Project Manager determines are properly due, or notify the Contractor in writing of the reasons for withholding a Certificate provided in Part F of this Section 2.24.
2. The issuance of a Project Certificate for Payment will constitute a representation by the Project Manager to the Owner that, based on the Project Manager's observations at the site as provided herein and the data comprising the Project Application for Payment, the Work has progressed to the point indicated and that, to the best of the Project Manager's knowledge, information and belief, the quality and timeliness of the Work is in accordance with the Contract Documents (subject to an evaluation of the Work for conformance with the Contract Documents upon Completion of the Work, to the results of any subsequent tests required by or performed under the Contract Documents, to minor deviations from the Contract Documents correctable prior to completion, and to any specific qualifications stated in the Certificate); and that based upon all currently available information, the Contractor is entitled to payment in the amount certified. However, by issuing a Project Certificate for Payment, the Project Manager shall not thereby be deemed to represent that the Project Manager has made exhaustive or continuous on-site inspections to check the quality or quantity of the Work, has reviewed the construction means, methods, techniques, sequences, or procedures, or has made any examination to ascertain how or for what purpose the Contractor has used the monies previously paid on account of the Contract Sum.

E. PROGRESS PAYMENTS

1. After the Project Manager has issued a Project Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents.

2. The Contractor shall promptly pay each Subcontractor upon receipt of payment from the Owner, out of the amount paid to the Contractor on account of such Subcontractor's Work, the amount to which Subcontractor is entitled, reflecting the percentage actually retained, if any, from payments to the Contractor on account of such Subcontractor's Work. The Contractor shall, by an appropriate agreement with each Subcontractor, require each Subcontractor to make payments to their Sub-subcontractors in similar manner.
3. The Project Manager may on request of any Subcontractor, at the Project Manager's discretion, furnish to that Subcontractor, if practicable, information regarding the percentages of completion or the amounts applied for by the Contractor and the action taken thereon by the Project Manager on account of Work done by such Subcontractor.
4. Neither the Owner nor the Project Manager shall have any obligation to pay or to see to the payment of any monies to any Subcontractor or Material Suppliers except as may otherwise be required by law.
5. Neither certification of a progress payment, delivery of a progress payment, nor partial or entire use or occupancy of the Project by the Owner, shall constitute an acceptance of any Work not performed in accordance with the Contract Documents.

F. PAYMENTS WITHHELD

1. The Project Manager may decline to certify payment and may withhold the Certificate in whole or in part to the extent necessary to reasonably protect the Owner, if, in the Project Manager's opinion, the Project Manager is unable to make representations to the Owner as provided herein above for Certificates for Payment. If the Project Manager is unable to make representations to the Owner and certify payment in the amount of the Project Application, the Project Manager will notify the Contractor as provided herein. If the Contractor and the Project Manager cannot agree on a revised amount, the Project Manager will promptly issue a Project Certificate for Payment for the amount for which the Project Manager is able to make such representations to the Owner. The Project Manager may also decline to certify payment or, because of subsequently discovered evidence or subsequent observations, the Project Manager may nullify the whole or any part of any Project Certificate for Payment previously issued to such extent as may be necessary, in the Project Manager's opinion, to protect the Owner from loss because of:
 - a. Defective Work not remedied;
 - b. Third party claims filed or reasonable evidence indicating probable filing of such claims, including claims by separate contractors;
 - c. Failure of the Contractor to make payments properly to Subcontractors, or for labor, materials or equipment;
 - d. Architect's determination, based upon reasonable evidence, that the Work cannot be completed for the unpaid balance of the Contract Sum;

- e. Damage to the Owner or another contractor;
 - f. Architect's determination, based upon reasonable evidence, that the Work will not be accomplished in compliance with the Work Order Completion Time;
 - g. Persistent failure to carry out the Work in accordance with the Contract Documents;
 - h. Failure of the Contractor to submit Construction Schedules or Submittal and Procurement Schedules as required;
 - i. Failure of the Contractor to maintain record drawings on a current basis;
 - j. Failure of the Contractor to submit notarized lien waivers from each Subcontractor, materials, or equipment supplier;
 - k. Failure of the Contractor to submit certified payroll reports;
 - l. Stop notice served upon the Owner.
2. A retention in the amount of one-thousand dollars (\$1,000) will be withheld from the Contractor's monthly progress payment for each and every required document not submitted in a timely manner by the Contractor or its subcontractors up to a maximum of ten-thousand dollars (\$10,000). For purposes of this Paragraph, the term "required document" includes, but is not limited to, certified payrolls, labor compliance documents, Disadvantaged Business Enterprise documents, and any other information or documents required to be submitted by the Contractor or any of its subcontractors under the terms of this Agreement or pursuant to applicable federal, state, or local laws or regulations. The retention provided for in this Paragraph shall be in addition to any other deduction or retention allowed under this Agreement, and shall be in addition to any other remedy or consequence provided by law for untimely submission of any required document. Such retention shall remain in effect only until such time as the required documents have been submitted by the Contractor or its subcontractor(s) and have been determined by the Owner to be both complete and acceptable as to form.
3. When the grounds as noted above are removed, payment shall be made for amounts withheld on the basis thereof.

G. COMPLETION AND FINAL PAYMENT

1. Following the Contractor's completion of the Work, the Contractor shall forward to the Project Manager a written notice that the Work is ready for final inspection and acceptance, and shall also forward to the Project Manager a final Application for Payment. Upon receipt, the Project Manager will promptly make such inspection. When the Project Manager finds the Work acceptable under the Contract documents and the Contract fully performed, the Project Manager will issue a Project Certificate for Payment which will certify the final payment due the Contractor. This certification will constitute a representation that, to the best of the Project Manager's knowledge, information, and belief, and on the basis of observations and inspections, the Work has been completed in accordance with the Terms and Conditions of the Contract Documents and that the entire balance found to be due the Contractor, and noted in said Certificate, is due and payable. The Project Manager's certification of said Project Certificate for Payment will constitute a further representation that the conditions precedent to the Contractor's being entitled to final payment as set forth herein below have been fulfilled.
2. Neither the final payment nor the remaining retainage shall become due until the Contractor submits to the Project Manager (1) an affidavit that all payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might in any way be responsible, have been paid or otherwise satisfied, (2) consent of surety, if any, to final payment, and (3) other data establishing payment or satisfaction of all such obligations, such as receipts, releases and waivers of liens arising out of the Contract, to the extent and in such form as may be designated by the Owner. If any Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against any such lien. The bond cannot be from the original surety insurer for the Project or any affiliate of the original surety. If any such lien remains unsatisfied after all payments are made, the Contractor shall refund to the Owner all monies that the latter may be compelled to pay in discharging such lien.
3. All provisions of this Agreement, including without limitation those establishing obligations and procedures, shall remain in full force and effect notwithstanding the making or acceptance of final payment, and the making of final payment shall not constitute a waiver of any claims by the Owner.
4. Upon completion and acceptance of all work whatsoever required, and upon the release of all claims against the Owner as specified, the Owner shall file a written Notice of Completion with the County Recorder as to the entire amount of work performed.

5. Final payment will be released within sixty (60) days after the date of acceptance of the Work as reflected in the Notice of Completion filed with the County Recorder's Office; provided, that Owner may withhold from the final payment, in the event of a dispute between Owner and Contractor, retentions in, and amount not exceeding, one hundred fifty percent (150%) of the disputed amount. At the Contractor's option, the Owner may release retention upon receipt of an unconditional lien release for the full value of the Work and any of its Contract Change Orders.
6. All manufacturers' warranties required by the Contract Documents shall commence on the date of the Notice of Completion for the Work. It shall be the Contractor's responsibility, through appropriate contractual arrangements with all subcontractors, materialmen, and suppliers, to ensure compliance with this requirement.
7. The acceptance by the Contractor of the final payment, after the date of Notice of Completion of the Project, shall be and shall operate as a release to the Owner of all claims and of all liability to the Contractor, under the Contract Documents or otherwise, for all things done or furnished in connection with this Work, excepting only the Contractor's claims for interest upon final payment, if such final payment be improperly delayed. No payments, however, final or otherwise, shall operate to release the Contractor or his/her sureties from any obligations under the Contract Documents, including but not limited to the Performance and Payment Bonds.

2.25 CHANGES TO THE WORK

- A. The Owner, without invalidating the Contract, may order changes in the Work within the general scope of the Contract consisting of additions, deletion, or other revisions. All such changes in the Work shall be authorized by a Contract Change Order, and shall be performed under the applicable conditions of the Contract Documents.
- B. **CONTRACT CHANGE ORDER:** A Change Order issued to add or delete Work from the Contract. Only an executed Contract Change Order will effectuate change in either the Contract Sum and/or the contract time. A Change Order is a written order to the Contractor dually signed to show both the approval of the Architect and Authorization of the Owner, issued after execution of the Contract. A Change Order signed by the Contractor indicates the Contractor's agreement therewith, including any adjustment in the Contract Sum or the contract time, and the full and final settlement of all costs (direct, indirect, and overhead) related to the Work authorized by the Change Order.
- C. All claims for additional compensation to the Contractor shall be presented in writing before the expense is incurred, and will be adjusted as provided herein. No work shall be allowed to lag pending such adjustment, but shall be promptly executed as directed, even if a disputed claim arises. No claim will be considered after the work in question has been done unless a Contract Change Order has been issued or a timely written notice of claim has been made by Contractor.

- D. Costs mean an itemized breakdown of all labor (by crafts), materials, sales taxes, equipment rentals, etc., for each portion of the Work which comprises the Change Order including any Subcontractor's itemized breakdown, plus not more than twenty percent (20%) to cover all profits and administration.
1. Under no circumstance will the total sum of allowable mark up for General Conditions, General Requirements, supervision, overhead (excluding small tools) and profit, exceed a cumulative total of twenty percent (20%), including markups for all parties involved in a change.
 - i. Work done by Contractor's own forces, not including bond and insurance premiums, shall not exceed a cumulative total of fifteen percent (15%);
 - ii. Work done by subcontractors, all tiers, including bond and insurance premiums, if any, shall not exceed a cumulative total of fifteen percent (15%);
 - iii. General Conditions, General Requirements, Supervision, Overhead and Profit for Contractor on Subcontractor's work, shall not exceed a cumulative total of five percent (5%).
 2. The cost or credit to the Owner resulting from a change in the Work shall be determined in one or more of the following ways:
 - i. By mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
 - ii. By unit prices state in the Contract Documents or subsequently agreed upon;
 - iii. By cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
 - iv. By the method provided under Article 2.26.
- E. The amount of credit to be allowed by the Contractor to the Owner, as confirmed by the Project Manager, for any deletion or change that results in a decrease in the Contract Sum will be the amount of the actual cost. When both additions and credits covering related Work or substitutions are involved in any one change, the allowance for overhead and profit shall be figured on the basis of the net increase, if any, with respect to that change.

2.26 CHANGES TO THE CONTRACT (EXTRA WORK AT FORCE ACCOUNT)

- A. If none of the methods set forth in Section 2.25.D, is agreed upon, the Contractor, provided that a written order signed by the Owner is received, shall promptly proceed with the Work involved. The cost of such Work shall then be determined by the Project Manager, on the basis of reasonable expenditures or savings of those performing the Work attributable to the change, including, in the case of an increase in the Contract Sum, not more than twenty percent (20%) for all overhead and profit. In such case, and also under Section 2.25.D, Paragraph 3, the Contractor shall keep and present, in such form as the Owner or the Project Manager may prescribe, an itemized accounting of actual cost together with appropriate supporting data for inclusion in a Contract Change Order. Unless otherwise provided in the Contract Documents, cost shall be limited to the following:
1. Labor Cost is the cost of labor for the workers (including working foremen) used in the actual and direct performance of the extra work, whether employed by the Contractor, or Subcontractors and Specialized Forces of any tier. Labor Cost shall include:
 - a. Actual Wages paid to the works, plus employer payments to or on behalf of the workers for health and welfare, pension, vacation, and training. If required by the Project Manager, certified payrolls shall be submitted with extra work reports as verification of wages paid to the workers.
 - b. A Labor Surcharge of twenty percent (20%) (thirty five percent (35%) for demolition work and roofing work) will be added to the Actual Wages as defined above. The Labor Surcharge shall constitute full compensation for all payments imposed by State and Federal laws, including Workers Compensation Insurance, Social Security, and Unemployment Insurance.
 - c. Subsistence and Travel Allowance if actually paid to the workers. Labor Surcharge will not be added to Subsistence and Travel Allowance.
 2. Equipment Cost is the payment made for the equipment actually used in the performance of the extra work.
 - a. Equipment valued at three hundred dollars (\$300) or less shall be considered as small tools, and no payment will be made therefor.
 - b. Equipment costs will be paid in accordance with the rental rates listed in the "Cal-Trans Equipment Rental Rates, County of Fresno, Department of Public Works and Planning," in effect at the time of bid, available from the Department, Suite 711, Fresno County Plaza Building, 2220 Tulare Street, Fresno, CA 93721.

- c. In the event that any of the equipment to be used is not listed in the above publication, the rental rate shall be agreed upon in writing by the Contractor and CM before the extra work is begun.
- 3. Materials Cost is the payment made for materials incorporated into the Work.
 - a. Materials Cost shall include sales tax, freight, and delivery charges, less any available discounts whether or not said discounts are taken.
 - b. Materials Cost shall be based upon supplier's or manufacturer's invoice. If invoices or other satisfactory evidence of cost are not furnished within sixty (60) days of delivery or within fifteen (15) days after acceptance of the Contract, whichever occurs first, then the Project Manager shall determine the Materials Cost, in his/her sole discretion, on the basis of available information and on his/her considered experience.
- 4. Specialized Services are those services or items of extra work that, by agreement of the Contractor and the Project Manager, cannot be performed by forces of the Contractor or his/her Subcontractors, and may be performed by a specialist.
 - a. Specialized Services may be paid for by invoice if the established practice of the specialized force industry does not provide complete itemization of Labor, Equipment, and Materials Costs.
- 5. Markup for Profit, Home Office and Field Office Overhead, Bond Premium, insurance, taxes, and supervision will be added to the total of Labor Cost, Equipment Cost, Materials Cost, and Specialized Services.
 - a. Markup will be added only once on any Extra Work at Force Account, regardless of the number of contractors and subcontractors involved.
 - b. It is recognized that individual contractors and subcontractors have different overhead costs, profit requirements, and bond premium rates. The amount to be added to Extra Work for markup shall include compensation for profit, overhead and bond premium without distinguishing among these items.
 - c. The markup to be added for Extra Work at Force Account on this Project shall be fifteen percent (15%) plus 1-1/2% for Performance and Payment Bonds for Contractor only.

6. Records shall be maintained by the Contractor and Subcontractors in such a manner as to provide a clear distinction between the costs of Extra Work paid for on a forced account basis and the costs of other operations. From these records, the Contractor shall furnish the Project Manager a completed extra work report for each day's extra work to be paid for on a force account basis. Extra work reports shall itemize the materials used, equipment rental charges, and specialized services costs, and shall provide names or identifications and classifications of workmen, the hourly rate of pay, and hours worked. Extra work reports shall be compiled and submitted to the Project Manager daily for verification and signature. Extra work reports shall be signed by the Contractor or his/her authorized representative.
7. If the Contractor disputes the Architect's cost determination, the Contractor may initiate a claim in compliance with the Claims and Disputes Resolution provisions of these General Conditions.

2.27 SITE CONDITIONS

- A. Where investigations have been conducted by the Owner of existing conditions on a site, including subsurface conditions, such investigations are made for the purpose of design only and for the information of bidders. The results of such investigations represent only the statement by the Owner as to the circumstance and character of materials actually encountered by the Owner during the investigations. The Owner makes no guarantee or warranty, express or implied, that the conditions indicated are representative of conditions existing throughout the site of a Project or any part of it, or that unanticipated conditions might not occur.
- B. All excavation work shall be performed on an "unclassified basis"; that is, such work shall include the removal of all material encountered including earth or rock formations, regardless of the type or hardness thereof, or groundwater conditions in the excavation, the cost of such excavations being included in the Contract Sum. Unclassified excavation Work includes drilling or blasting operations.
- C. If site conditions are discovered that materially differ from previous information that the Contractor has received, and that could not have been discovered by the Contractor through prudent and reasonable investigation prior to developing the Contract Sum for the Work, the Contractor shall be compensated for additional costs incurred in working with the unknown site conditions, but only to the extent that such previously unknown and undiscoverable site conditions cause the Contractor to incur costs in addition to the Contract Sum for that portion of the Work. The Contractor must be able to demonstrate clearly the original Contract Sum for that portion of the Work (plus any Contract Change Orders applicable to that portion of the Work) and the additional costs incurred as a direct result of the unknown site conditions. Only additional costs over and above the amount of the Contract Sum for that portion of the Work will be compensated upon a recommendation of approval by the Project Manager.

2.28 REQUEST FOR EQUITABLE ADJUSTMENT

- A. If the Contractor considers a Request for Equitable Adjustment is justified for any increase in the contract time, the Contractor shall promptly, upon first observance of the condition giving rise to the request, provide the Project Manager and Owner written notice of such condition and circumstance. This notice shall be given by the Contractor before proceeding to execute the Work, except in emergency endangering life or property, in which case the Contractor shall proceed in accordance with the Emergency provisions of these General Conditions. No such request shall be valid unless so made. A Contract Change Order shall be required to authorize any change in the contract time resulting from such request for equitable adjustment.
- B. If the Contractor requests that additional cost or time is involved because of, but not limited to, (1) any written interpretation pursuant to Section 2.07.G, (2) any order by the Owner to stop the Work pursuant to Section 2.08 where the Contractor was not at fault, or any such order by the Project Manager as the Owner's agent, (3) any written order for a minor change in the Work issued pursuant to Section 2.29, the Contractor shall make such request for equitable adjustment as provided in Section 2.28.A.

2.29 MINOR CHANGES IN THE WORK

The Project Manager will have authority to order minor changes in the Work not involving an adjustment in the Contract Sum or extension of the contract time and not inconsistent with the intent of the Contract Documents. Such changes shall be enacted by written order issued through the Project Manager, and shall be binding on the Owner and the Contractor. The Contractor shall carry out such written orders promptly.

2.30 SUCCESSORS AND ASSIGNS

The Owner and the Contractor, respectively, bind themselves, their partners, successors, assigns, and legal representatives to the other party hereto and to the partners, successors, assigns, and legal representatives of such other party with respect to all covenants, agreements, and obligations contained in the Contract Documents. Neither party to the Contract shall assign the Contract or sublet it as a whole without the written consent of the other.

2.31 ASSIGNMENT OF MONEYS

The Contractor shall not assign moneys due or to become due him/her under the contract without the written consent of the Auditor-Controller of Fresno County. Any assignment of moneys shall be subject to all proper set-offs in favor of the County of Fresno and to all deductions provided for in the contract and particularly all money withheld, whether assigned or not, shall be subject to being used by the County of Fresno for the completion of the work in the event that the Contractor should be in default therein.

2.32 GUARANTEE OF WORK

- A. The Contractor warrants to the Owner that all materials and equipment and the Work as a whole furnished under this Contract will be new unless otherwise specified, and that all Work will be of good quality, free from faults and defects, and in conformance with the Contract Documents, for a period of 365 Calendar Days from the date of acceptance of the Work as specified in the Notice of Completion, unless a longer period is otherwise specified. All manufacturer's warranties required by the Contract Documents shall commence on the date of the filing of the Notice of Completion for the Work (which date necessarily will follow the performance under separate contracts). It shall be the Contractor's responsibility, through appropriate contractual arrangements with all subcontractors, materialmen, and suppliers, to ensure compliance with this requirement. All Work not conforming to these requirements, including substitutions not properly reviewed and authorized, may be considered defective. If required by the Project Manager, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.
- B. If repairs or changes are required in connection with guaranteed work within any guaranteed period, which, in the opinion of the Project Manager is rendered necessary as the result of the use of materials, equipment, or workmanship which are inferior, defective, or not in accordance with the Contract Documents, the Contractor shall, promptly upon receipt of notice from the Owner, and without expense to the Owner, (1) place in satisfactory condition in every particular all of such guaranteed work, correct all defects therein; and (2) make good all damage to the building or site, or equipment or contents thereof, which, in the opinion of the Project Manager, is the result of the use of materials, equipment, or workmanship which are inferior, defective, or not in accordance with the Contract Documents; and (3) make good any work or materials, or the equipment and contents of said building or site disturbed in fulfilling any such guarantee.
- C. If the Contractor disturbs any work guaranteed under another contract in fulfilling the requirements of the contract or of any guarantee, embraced in or required thereby, he/she shall restore such disturbed work to a condition satisfactory to the Project Manager and guarantee such restored work to the same extent as it was guaranteed under such other contract.
- D. The Owner may have the defects corrected if the Contractor, after notice, fails to proceed promptly to comply with the terms of the guarantee and the Contractor and his/her surety shall be liable for all costs and expenses incurred in connection therewith.

- E. All special guarantees applicable to definite parts of the work that may be stipulated in the Contract Documents shall be subject to the terms of this Article 2.32 during the first (1st) year (365 Calendar Days) of the life of such special guarantee.

2.33 RESPONSIBILITY FOR DAMAGE

- A. Neither the Owner, the Architect, nor any officer or employee of the County, or officer or employee thereof, within the limits of which the work is being performed, shall be answerable or accountable in any manner, for any loss or damage that may happen to the work or any part thereof; or for any of the materials or other things used or employed in performing the work; or for injury to any person or persons, either workmen or the public, for damage to property from any cause which might have been prevented by the Contractor, or his/her workmen, or anyone employed by him/her, against all of which injuries or damages to persons and property the Contractor having control over such work must properly guard.
- B. The Contractor shall be responsible for any liability imposed by law for any damage to any person or property resulting from defects or obstructions or from any cause whatsoever during the progress of the work or at any time before the issuance of the Notice of Completion.
- C. The Contractor shall indemnify and hold harmless the Owner, the Project Manager, the Architect, and all of their respective officers and employees, from all claims, lawsuits or actions of every kind and nature whatsoever, brought for, or on account of any injuries or damages received or sustained by any person or persons, resulting from any act or admission by the Contractor or his/her servants or agents, in the construction of the work or by or in consequence of any negligence in guarding the same, in improper materials used in its construction, or by or on account of any act or omission of the Contractor or his/her agents in the performance of Contractor's obligations under the Contract Documents. In addition to any remedy authorized by law, so much of the money due the Contractor under and by virtue of the contract as shall be considered necessary by the Owner may be retained by the Owner until disposition has been made of such claims, lawsuits, or actions for damages as aforesaid.

2.34 WRITTEN NOTICE

Subject to any additional requirements that may be applicable to claims under the immediately following Article 2.35 RESOLUTION OF CONTRACT CLAIMS AND DISPUTES, formal service, when required, of written notice shall be deemed to have been duly served if delivered in person, to the individual or member of the firm or entity or to an officer of the corporation for whom it was intended, or if sent by registered or certified mail to the listed address of that entity for the attention of such individual.

2.35 RESOLUTION OF CONTRACT CLAIMS AND DISPUTES

- A. A Claim is a demand or assertion, sent by registered mail or certified mail with return receipt, requested by one (1) of the parties seeking, as a matter of right, adjustment or interpretation of Contract terms, payment of money, extension of time, or a request for equitable adjustment or Contract Change Order which cannot be resolved per provisions of Section 2.25 - CHANGES TO THE WORK. Any Claim shall be reduced to writing and filed with the Project Manager, within ten (10) calendar days after the Contractor has notice of the condition giving rise to the Claim, and final action per Section 2.25 - CHANGES TO THE WORK procedures has taken place or has been declared as such in writing, by either party. Such ten (10)-day notice of an asserted claim is in addition to the requirement for prompt notice required per Section 2.25 - CHANGES TO THE WORK.
- B. The Contractor shall not claim or recover any overhead cost administrative or otherwise, particularly 'Home Office' expenses, 'Extended site overhead', or any other overhead cost on the basis of any 'Home Office' damages formula, 'Eichleay' formula, 'Total Cost' recovery formula or any other such formula.
- C. REQUIREMENTS FOR FILING A CLAIM. Claims shall be submitted to the Project Manager. Claims must be filed within the time specified above, but in no event shall any claim be considered by the Project Manager that is filed later than the date of final payment of the Project. The claim shall be in writing and shall be a sum certain, if known. If unknown, Contractor shall specify the basis for establishing the sum certain. Claim shall include a statement of the reasons for the asserted entitlement and include the documents necessary to substantiate the claim. Such documents may include, but are not limited to, payroll records, purchase orders, quotations, invoices, estimates, subcontracts, daily logs, supplier contracts, subcontract billings, bid takeoffs, equipment rental invoices, ledgers, journals, daily reports, job diaries, and any documentation related to the requirements of Section 2.25 - CHANGES TO THE WORK. In the case of a continuing delay, only one (1) claim is necessary. If adverse weather conditions are the basis for a claim for additional time, such claim shall be documented by data substantiating that weather conditions were abnormal for the period of time and could not have been reasonably anticipated, and that weather conditions had an adverse effect on the critical activities on the construction schedule. The Contractor shall certify, at the time of submission of a claim, as follows:

"I, _____, being the

(MUST BE AN OFFICER) of
(GENERAL CONTRACTOR),
declare under penalty of perjury under the laws of the State of
California, and do personally certify and attest that: I have thoroughly
reviewed the attached claim for additional compensation and/or
extension of time, and know its contents, and said claim is made in
good faith; the supporting data is truthful and accurate; the amount
requested accurately reflects the contract adjustment for which the
Contractor believes the Owner is liable; and, further, that I am familiar
with California Penal Code Section 72 and California Government Code
Section 12560, et seq, pertaining to false claims, and further know and
understand that submission or certification of a false claim may lead to
fines, imprisonment and/or other severe legal consequences."

By: _____
(Contractor's signature) (Date)

D. Nothing in this Article is intended to extend the time limit or supersede notice requirements otherwise provided by this contract or by applicable law for the filing of claims. Any formal claim shall be processed in accordance with the provisions of Public Contract Code Section 9204 and Section 20104 et. seq., each of which establishes a process for resolution of claims, the provisions of which are consistent with and effectively summarized by the following:

1. The Owner (or his/her designee), shall review the facts pertinent to the claim, obtain additional information deemed necessary for a decision (if any), review recommendations of the Project Manager, coordinate with the contract administrator (if any), and secure assistance from legal and other advisors, and render a written decision on the claim within forty-five (45) days of receipt of the claim. If additional information or documentation is thereafter required, it shall be requested and provided pursuant to this subdivision, upon mutual agreement of the Owner (or his/her designee) and claimant. The Owner's (or his/her designee's) written response to the claim, as supplemented by any additional information and/or documentation provided by claimant, shall be submitted to the claimant within fifteen (15) days after receipt of the further information and/or documentation or within a period of time no greater than that taken by the claimant in producing the additional information, whichever is greater.
 - a. For claims of over fifty thousand dollars (\$50,000) and less than or equal to three hundred seventy-five thousand dollars (\$375,000), the Owner (or his/her designee), shall respond in writing to all written claims within sixty (60) days of receipt of the claim, or may request, in writing, within thirty (30) days of receipt of the claim, any additional documentation supporting the claim or relating to defenses to the claim the Owner (or his/her designees) may have against the claimant.

2. If the claimant disputes the written response of Owner (or his/her designee), or Owner fails to respond within the time prescribed, the claimant may so notify the Owner (or his/her designee), in writing, either within fifteen (15) days of receipt of the Owner (or his/her designee's) response or within fifteen (15) days of the Owner (or his/her designee's) failure to respond within the time prescribed, respectively, and demand an informal conference to meet and confer for settlement of the issues in dispute. Upon a demand, the Owner (or his/her designee) shall schedule a meet and confer conference within thirty (30) days for settlement of the dispute.
3. Within ten (10) business days following conclusion of the meet and confer conference, any unpaid portion of the claim remaining in dispute shall be submitted to nonbinding mediation, as that term is defined by Public Contract Code Section 9204(d)(2)(C).
4. If following the conclusion of the meet and confer conference and mediation process, the claim or any portion thereof remains in dispute, the claimant may file a claim pursuant to Chapter 1 (commencing with Section 900) and Chapter 2 (commencing with Section 910) of Part 3 of Division 3.6 of Title 1 of the Government Code. For purposes of those provisions, the running of the period of time within which a claim must be filed shall be tolled from the time the claimant submits his/her written claim pursuant to subdivision (a) until the time the claim is denied, including any period of time utilized by the meet and confer conference and mediation process as described in the immediately preceding Paragraphs 2 and 3 of this Section D.
5. In the event of any perceived conflict between the summary of the procedure set forth in this Article and the actual provisions of the Public Contract Code Section 9204 and Section 20104, et seq., the statutory provisions shall control; and in the event of any perceived conflict between the provisions of Section 9204 and Section 20104, et seq., the provisions of Section 9204 shall control.

- E. PROCEDURES FOR CIVIL ACTIONS TO RESOLVE DISPUTED CLAIMS.
Non-binding Mediation: Within sixty (60) days, but no earlier than thirty (30) days, following the filing of a responsive pleading, the court shall submit the matter to non-binding mediation unless waived by mutual stipulation by both parties. The mediation process shall provide for the selection within fifteen (15) days by both parties of a disinterested third person as mediator, shall be commenced within thirty (30) days of the submittal, and shall be concluded within fifteen (15) days from the commencement of the mediation unless a time requirement is extended upon a good cause shown to the court. If the parties fail to select a mediator within the 15-day period, any party may petition the court to appoint the mediator.

Judicial Arbitration: If the matter remains in dispute, the case shall be submitted to judicial arbitration pursuant to Chapter 2.5 (commencing with Section 1141.10) of Title 3 of Part 3 of the Code of Civil Procedure, notwithstanding Section 1141.11 of the code. The Civil Discovery Act of 1986 (Article 3 (commencing with Section 2016) of Chapter 3 of Title 3 of Part 4 of the Code of Civil Procedure) shall apply to any proceeding brought under this

subsection consistent with the rules pertaining to judicial arbitration. Arbitrators shall be experienced in construction law.

Appeals: As provided by statute (specifically Public Contract Code section 20104.4(b)(3) and Code of Civil Procedure section 1141.21), any party appealing an arbitration award who does not obtain a more favorable judgment shall, in addition to payment of costs and fees, also pay the attorneys' fees on appeal of the other party.

- F. CLAIMS AND DISPUTES EXEMPT FROM FILING REQUIREMENTS. The requirements and procedures imposed by this Article do not apply to:
1. Any claims by the Owner; or
 2. Any claim for or respecting personal injury or death or reimbursement or other compensation arising out of or resulting from liability for personal injury or death; or
 3. Any claim or dispute relating to stop payment requests or stop notices; or
 4. Any claim or dispute related to the approval, refusal to approve, or substitution of Subcontractors, regardless of tier, and suppliers.
- G. PAYMENT OF UNDISPUTED PORTION OF CLAIM. Owner shall pay claimant such portion of a claim that is undisputed except as otherwise provided in the contract.
- H. CONTINUE WORK DURING DISPUTE. In the event of any disputed claim or other dispute between the Owner and the Contractor, the Contractor will not stop work but will prosecute the work diligently to completion in his/her manner directed by the Owner, and the dispute shall be resolved by a court of law after completion of the Work. However, Contractor must submit all disputes in accordance with the provisions of this Section 2.35.
- I. SUIT IN FRESNO COUNTY ONLY. Any litigation arising out of this Contract shall be brought in Fresno County and Contractor hereby waives the removal provisions of California Code of Civil Procedure Section 394.

2.36 PERFORMANCE BOND, LABOR AND MATERIAL PAYMENT BOND, AND WARRANTY BOND

- A. The Contractor shall furnish Performance Bond in the amount of one hundred percent (100%) of the Contract Sum, and Payment Bond in the amount of one hundred percent (100%) of the Contract Sum and One Year Warranty Bond in the amount of ten percent (10%) of the Final Contract Sum, which is the cumulative amount that will have been paid to Contractor for all of the Work performed under the Contract once the Project has been completed and the Work has been accepted by the County.

- B. All bonds required, whether Bid bonds, Performance, Payment, Warranty, or other bonds, shall be issued by an admitted surety insurer authorized by the California Insurance Commissioner to transact surety insurance in the state. The same admitted surety insurer must issue the Bid Bond, Performance Bond, Payment Bond, and Warranty Bond. The payment, performance, and warranty bonds required by these specifications will neither be accepted nor approved by the Owner unless the bonds are underwritten by an admitted surety and the requirements of California Code of Civil Procedure section 995.630 are met. The bonds must include a physical mailing address, phone number, and contract person for the admitted surety insurer. The Owner further reserves the right to satisfy itself as to the acceptability of the surety and the form of bond. Upon request of the Owner, the bidder must submit the following documents:
1. The original, or a certified copy, of the unrevoked appointment, power of attorney, bylaws, or other instrument authorizing the person who executed the bond to do so.
 2. A certified copy of the certificate of authority of the insurer issued by the California Insurance Commissioner.
 3. A certificate from the county clerk that the certificate of authority has not been surrendered, revoked, canceled, annulled, or suspended, or in the event that it has, that renewed authority has been granted.
 4. A financial statement of the assets and liabilities of the insurer to the end of the quarter calendar year prior to thirty (30) days next preceding the date of the execution of the bond, in the form of an officers' certificate as defined in Corporations Code section 173.

2.37 RIGHTS AND REMEDIES

- A. The duties and obligations imposed by the Contract Documents and the rights and remedies available hereunder shall be in addition to, and not a limitation of, any duties, obligations, rights, and remedies otherwise imposed or available by law.
- B. No action or failure to act by the Owner, or by the Project Manager or Architect, regarding any deficiency, breach, or default in performance by the Contractor under the Contract Documents, shall be deemed or construed to constitute acquiescence of the Owner in connection therewith or with regard to any subsequent deficiency, breach, or default in performance by the Contractor; nor shall any such prior act of failure to act by or on behalf of Owner be deemed or construed as a waiver of any rights in favor of Owner regarding any such deficiency, breach, or default in performance by the Contractor, regardless of the similarity to the prior incident or circumstance when no action was taken regarding any alleged deficiency, breach, or default in performance by the Contractor.

2.38 TIME, DELAYS, AND LIQUIDATED DAMAGES

A. DEFINITIONS

1. Unless otherwise provided, the contract time is the period of time allotted in the Contract Documents for completion of the Work, including authorized adjustments thereto.
2. The Date of Commencement of the Work is the date established in the Notice to Proceed.
3. The Date of Completion of the Work is the date on which the work is certified as complete by the Project Manager as specified in the Notice of Completion.
4. The term "day" as used in the Contract Documents shall mean calendar day unless specifically designated otherwise.

B. PROGRESS AND COMPLETION

1. Time is of the essence regarding all time limits stated in the Contract Documents. By executing the Agreement, the Contractor confirms that the contract time is a reasonable period for performing the Work.
2. The Contractor shall begin the Work on the Date of Commencement. The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, prematurely commence operations on the site or elsewhere prior to the effective date of insurance required herein to be furnished by the Contractor. The Date of Commencement of the Work shall not be changed by the effective date of such insurance.
3. The Contractor shall carry the Work forward expeditiously with adequate forces and shall achieve Completion of the Work within the contract time.

C. DELAYS AND EXTENSIONS OF TIME

1. Delays in prosecution of parts or classes of the Work that are not demonstrated to prevent or delay completion of the entire Project or specific milestones within the contract time are not "unavoidable delays" for purposes of this section.
2. In all cases, the time authorized for extension of the contract time shall be no greater than the number of days directly attributable to the event or circumstances which causes unavoidable delay in the completion of the Project. Contractor shall be entitled, in the case of unavoidable delays, to an extension in the contract time, but not to any increase to the Contract Sum. "Unavoidable delay" for this purpose shall be defined as follows:

- a. Unavailable Materials. That materials or articles called for in the Contract Documents are not obtainable within the time required for timely completion; provided that such materials or articles were listed by the Contractor in the schedule required by Section 2.17 - CONTRACTOR'S CONSTRUCTION SCHEDULE; that the Contractor demonstrates that the unavailability of the materials is in fact the cause for the delay, and could not have been avoided by an appropriate adjustment in the Construction Schedule; and that the unavailability of such materials is due to circumstances beyond the Contractor's control. If good cause for delay is demonstrated pursuant to this subsection, the Owner, at its sole discretion, may grant a time extension.
- b. Force Majeure. That delays in construction have resulted from circumstances beyond the control of the Contractor and which the Contractor could not have provided against by the exercise of reasonable care, prudence, foresight, and diligence. Unavoidable delays within the meaning of this subparagraph shall be those caused by acts of God, war, insurrection, civil disorder, fire, floods, epidemic, or strikes.
- c. Unseasonable Weather. An extension of contract time may be granted due to weather which is unsuitable for the Work currently in progress, upon the determination of the Owner that the weather conditions in fact caused the delay in completion of the Project and that such weather conditions were not, and could not in the exercise of reasonable diligence, have been foreseen by the Contractor. Seasonable weather that, in the exercise of reasonable foresight and diligence, should be expected in the area at the time of year in question is not cause for an extension of time.
- d. Time Extensions Due to Contract Change Orders or Work Authorizations. A time extension may be granted due to additional work that results in a delay in the Project caused by the approval by the Owner of a Contract Change Order or Work Authorization. The Contractor shall be entitled to a contract time extension Change Order only when the extra Work is demonstrated by the Contractor to have caused a delay in the Project.
- e. Owner-Caused Delays. In the event that the Project is delayed by acts of the Owner not authorized by the Contract Documents which the Contractor demonstrates will or have caused an unavoidable delay, the Contractor shall be entitled to a contract time Change Order to offset the extra time incurred by the Contractor. The Contractor will not be entitled to adjustments in the Contract Sum. Extra time shall be limited to that which is directly identified as critical by the delay.

4. The Contractor specifically agrees that a time extension as provided herein is its sole remedy for Owner-caused delays, and agrees to make no claim or demand for additional damages, nor claim an acceleration of the time for performance.
5. The Contractor shall not be entitled to any contract time extension nor Contract Sum adjustment for alleged Owner delays if the Owner has acted within the time limits specified by the Contract Documents.

D. NOTICE OF DELAYS

1. Contractor shall notify the Project Manager promptly whenever the Contractor foresees any event or circumstance that may delay the prosecution of the Work and in Contractor's opinion may provide grounds for an extension, and shall in any event notify the Project Manager immediately upon the occurrence of any such delay. The Contractor shall take immediate steps to prevent, if possible, the occurrence or continuance of the delay. If this cannot be done, the Project Manager shall determine how long the delay shall continue and to what extent the prosecution and completion of the Work are being delayed thereby. Such notification shall specify with detail the cause asserted by the Contractor to constitute grounds for an extension. Failure of the Contractor to submit such a notice within ten (10) days after the initial occurrence of the event giving rise to the delay shall constitute a waiver by the Contractor of any request for a time extension, and no extension shall be granted as a consequence of such delay.
2. If the Contractor believes that the delay in prosecution in the Work will result in an unavoidable delay in completion of the entire Project, the Contractor shall submit evidence to support that belief, together with its request for a time extension. Such evidence shall include a demonstration that the delayed portion of the Work will affect the Critical Path Scheduling of the entire Project. The Contractor shall also submit a proposed revised Construction Schedule, which accounts for the delay in completion of the entire Project caused by the delay in prosecution of part of the Project, and includes a revised Critical Path demonstrating how the Project will be completed within the proposed revised contract time.

E. INVESTIGATION; PROCEDURE

1. Upon receipt of a request for Time extension, the Project Manager shall conduct an investigation of the facts asserted by the Contractor to constitute grounds for an extension. The results of this investigation shall be reported by the Project Manager to the Contractor and shall indicate whether he/she will recommend for or against such extension to the Owner. The performance of this investigation by the Project Manager shall not be construed as direction or recommendation to the Contractor regarding scheduling of the work. Scheduling this work is the sole responsibility of the Contractor.

2. The Project Manager may, in his/her sole discretion, defer this recommendation to allow the accumulation of time extensions due to Work Authorizations into a periodic or final Contract Change Order request.
3. Upon receiving the Project Manager's recommendation to the Owner regarding the Contractor's request for a time extension, the Contractor may either withdraw its application for extension, or request that it be scheduled for action by the Owner. If the Owner disallows the request, there shall be no allowance made for the time during which the request was pending, and the Contractor shall remain obligated to complete the Work in the time specified.
4. If the Owner approves the time extension Contract Change Order, the new Construction Schedule submitted by the Contractor and approved by the Owner shall be deemed to amend the original Construction Schedule approved by the Owner; thereafter, the amended Construction Schedule shall have the same force and effect as the originally approved Progress Schedule.
5. The revised Construction Schedule must be submitted within seven (7) calendar days of the date on which the Owner approves the change.
6. The Contractor agrees that the Owner's determination as to the existence of grounds for an extension, and the duration of any such extension, shall be final and binding upon both Owner and Contractor.

F. DISCRETIONARY TIME EXTENSION FOR BEST INTEREST OF OWNER

1. The Owner reserves the right to extend the contract time for completion of the Work if the Director of Public Works and Planning or designee determines that such extension is in the best interest of the Owner.
2. In the event that such discretionary extension is made at the request of the Contractor, the Owner shall have the right to charge to the Contractor all or any part, as the Board may deem proper, of the actual cost to the Owner for engineering, inspection, supervision, contract administration, incidental, and other overhead expenses that accrue during the period of such extension, and to deduct all or any portion of such amounts from the final payment for the Work.
3. In the event such extension is ordered over the objection of the Contractor, the Contractor shall be entitled to a Contract Change Order adjusting the price paid to reflect the actual costs incurred by the Contractor as a direct and proximate result of the delay, upon his/her written application therefor, accompanied by such verification of costs as the Project Manager requires. Only additional direct costs incurred at the site will be reimbursable by Contract Change Order.

G. LIQUIDATED DAMAGES

1. If the Work is not completed by Contractor in the time specified in the Work Order, or within any period of extension authorized pursuant to this Article, the Contractor acknowledges and admits that the Owner will suffer damage, and that it is impracticable and infeasible to fix the amount of actual damages. Therefore, it is agreed by and between the Contractor and the Owner that the Contractor shall pay to the Owner as fixed and liquidated damages, and not as a penalty, the sum specified in Section 005213, Agreement, Article III for each calendar day of delay until the Work is completed and accepted, and that both the Contractor and the Contractor's surety shall be liable for the total amount thereof, and that the Owner may deduct said sums from any monies due or that may become due to the Contractor.
2. This liquidated damages provision shall apply to all delays of any nature whatsoever, save and except only unavoidable delays approved by the Owner pursuant to the provisions of Article 2.38.C.2 hereinabove, or discretionary time extensions approved by the Board of Supervisors pursuant to the provisions of Article 2.38.F hereinabove.

H. EXTENSION OF TIME NOT A WAIVER

1. Any extension of contract time granted pursuant to this Article shall not constitute a waiver by the Owner, nor a release of the Contractor, from his/her obligations to perform the Work within the allotted contract time.
2. Granting of a time extension due to one (1) circumstance on one (1) request therefore shall not constitute a granting by the Owner of an extension of time for any other circumstance or the same circumstance occurring at some other time, and shall not be interpreted as a precedent for any other request for extension.

2.39 PROTECTION OF PERSONS AND PROPERTY

A. SAFETY PRECAUTIONS AND PROGRAMS

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the Work.

B. SAFETY OF PERSONS AND PROPERTY

The Contractor shall take all reasonable precautions for the safety of, and shall provide all reasonable protection to prevent damage, injury, or loss to:

1. All employees on the Work and all other persons who may be affected thereby;
2. All the work and all materials and equipment to be incorporated therein, whether in storage or off the site, and that is under the care, custody, or control of the Contractor or any of the Contractor's Subcontractors or Sub-subcontractors;
3. Other property at the site or adjacent thereto, including trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction; and
4. The work of the Owner or other separate contractors.

C. The Contractor shall give all notices and comply with all applicable laws, ordinances, rules, regulations, and lawful orders of any public authority bearing on the safety of persons or property or their protection from damage, injury or loss.

D. The Contractor shall erect and maintain, as required by existing conditions and the progress of the Work, all reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards, promulgating safety regulations, and notifying owners and users of adjacent facilities.

E. When the use or storage of explosives or other hazardous materials or equipment is necessary for the execution of the Work, the Contractor shall exercise the utmost care and shall carry on such activities under the supervision of properly qualified personnel.

F. The Contractor shall promptly remedy all damage or loss to any property referred to above caused in whole or in part by the Contractor, any Subcontractor, any Sub-subcontractor, anyone directly or indirectly employed by any of them, or anyone for whose acts any of them may be liable, and for which the Contractor is responsible under the above noted clauses, except damage or loss attributable solely to the acts or omissions of the Owner, the Project Manager, or anyone directly or indirectly employed by any of them, or by anyone for whose acts any of them may be liable, and not attributable in any degree to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under the Indemnification provisions provided herein.

G. The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner and the Project Manager.

- H. The Contractor shall not load or permit any part of the Work to be loaded in a manner that could endanger its safety or pose a risk to anyone working at the Project site.
- I. EMERGENCIES
In any emergency affecting the safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury, or loss. Any additional compensation or extension of time claimed by the Contractor on account of emergency work shall be determined as provided in the provisions herein for Changes in the Work.

2.40 INSURANCE

A. CONTRACTOR'S INSURANCE

1. Bidders' attention is directed to the insurance requirements below. It is highly recommended that Bidders confer with their respective insurance carriers or brokers to determine in advance of bid submission the availability of the insurance certificates and endorsements required below. A bidder who is awarded a contract and thereafter fails to comply strictly with the insurance requirements, will be deemed to be in default of its obligations.
2. Contractor shall procure and maintain for the duration of the Contract, and for three (3) years thereafter, insurance against claims for injuries to persons or damages to property which may arise from, or in connection with, the performance of the work hereunder by the Contractor, his agents, representatives, employees, or subcontractors. The cost of such insurance shall be included in the Contractor's bid.
3. No later than ten (10) calendar days following the Award of the Contract, and prior to execution of the Agreement for Construction by the Owner, the Contractor shall submit certificates of insurance, signed by an authorized agent of the insurer, attesting to insurance coverage of the Contractor as required by this Article.

B. MINIMUM SCOPE AND LIMITS OF INSURANCE

Coverage shall be at least as broad as:

1. Commercial General Liability (CGL): Insurance Services Office (ISO) Form CG 00 01 covering CGL on an "occurrence" basis, including products and completed operations, property damage, bodily injury, and personal & advertising injury with limits no less than five million dollars (\$5,000,000) per occurrence and an annual aggregate of ten million dollars (\$10,000,000). If a general aggregate limit applies, either the general aggregate limit shall apply separately to this project/location (ISO CG 25 03 or 25 04) or the general aggregate limit shall be three times the required occurrence limit.
2. Automobile Liability: Insurance Services Office (ISO) Form CA 0001 covering Code 1 (any auto), with limits no less than five million dollars (\$5,000,000) per

accident for bodily injury and property damage. Coverage should include owned and non-owned vehicles used in connection with this Agreement and all applicable endorsements. This requirement can be obtained through an umbrella policy.

3. Workers' Compensation insurance as required by the State of California, with Statutory Limits, and Employers' Liability insurance with a limit of no less than one million dollars (\$1,000,000) per accident for bodily injury or disease.
4. If Contractor is a licensed professional or employs professional staff, (e.g., Architect, Engineer, Surveyor, etc.) in providing services, Professional Liability with limits no less than two million dollars (\$2,000,000) per occurrence or claim, and three million dollars (\$3,000,000) annual aggregate.
5. Builder's Risk (Course of Construction) insurance utilizing an "All Risk" (Special Perils) coverage form, with limits equal to the completed value of the project and no coinsurance penalty provisions.

If Contractor maintains broader coverage and/or higher limits than the minimums shown above, the Owner requires and shall be entitled to the broader coverage and/or the higher limits maintained by the Contractor. Any available insurance proceeds in excess of the specified minimum limits of insurance and coverage shall be available to the Owner.

Self-Insured Retentions

Self-insured retentions must be declared to and approved by the Owner. At the option of the Owner, either: the Contractor shall obtain coverage to reduce or eliminate such self-insured retentions as respects the Owner, its officers, officials, employees, and volunteers; or the Contractor shall provide a financial guarantee satisfactory to the Owner guaranteeing payment of losses and related investigations, claim administration, and defense expenses. The policy language shall provide, or be endorsed to provide, that the self-insured retention may be satisfied by either the named insured or Owner.

C. OTHER INSURANCE PROVISIONS

Contractor's insurance policies are to contain, or be endorsed to contain, the following provisions:

1. The coverage shall contain no special limitations on the scope of protection afforded to the Owner, its officers, officials, employees, or volunteers.
2. The County of Fresno, its officers, officials, employees, and volunteers are to be named individually and collectively, as additional insureds on the CGL policy with respect to liability arising out of work or operations performed by or on behalf of the Contractor including materials, parts, or equipment furnished in connection with such work or operations and automobiles owned, leased, hired, or borrowed by or on behalf of the Contractor. The coverage shall contain no special limitations on the scope of protection afforded to the Owner, its officers, officials, employees, or volunteers.

3. The insurer shall agree to waive all rights of subrogation against the Owner, its officers, officials, employees, and volunteers for losses arising from work performed by the Contractor for the Owner.
4. For any claims related to this project, the Contractor's insurance coverage shall be primary insurance coverage at least as broad as ISO CG 20 01 04 13 as respects the Owner, its officers, officials, employees, and volunteers. Any insurance or self-insurance maintained by the Owner, its officers, officials, employees, or volunteers shall be excess of the Contractor's insurance and shall not contribute with it.
5. Any failure to comply with reporting provisions of the policies shall not affect Coverage provided to the Owner, its officers, officials, employees, agents, Engineers, Consulting Engineers, or volunteers.
6. The Contractor's insurance shall apply separately to each insured against whom claim is made or suit is brought, except with respect to the limits of the insurer's liability.
7. All Contractor's insurance policies for coverage required under this agreement shall not be cancelled or changed, such as a reduction in coverage, without a minimum of thirty (30) days advance written notice given to Owner.
8. The insurer shall agree to waive all rights of subrogation against the Owner, its officers, officials, employees, and volunteers for losses arising from work performed by the Contractor for the Owner.
9. The Builder's Risk (Course of Construction) policy shall be an "All Risk" (Special Perils) coverage form, with limits equal to the completed value of the project and no coinsurance penalty provisions. All subcontractors shall be insured to the extent of their portion of the work under the Contractor. The Contractor shall request, and is responsible to confirm with its insurer, that the County of Fresno and all subcontractors are named, both as additional insured and as additional loss payees, on the Builder's Risk insurance policy. The Contractor and all subcontractors waive all rights, each against the others, for damages arising from perils covered by the insurance required under the terms of this article, except such rights as they may have to the proceeds of the Builder's Risk insurance obtained and maintained by the Contractor.

D. ACCEPTABILITY OF INSURERS

Contractor shall obtain the policies and coverages specified herein from an admitted insurer in good standing with and authorized to transact business in this state by the California Department of Insurance, and having a Best's rating of no less than A FSC VIII.

E. SUBCONTRACTORS

Contractor shall include all Subcontractors as insured under its policies or shall furnish separate certificates and endorsements for each Subcontractor.

F. EVIDENCE OF COVERAGE

Within ten (10) days of bid award, Contractor shall furnish the Owner with original Certificates of Insurance including all required amendatory endorsements (or copies of the applicable policy language effecting coverage required by this Article 2.40) and a copy of the Declarations and Endorsement Page of the CGL policy listing all policy endorsements to Owner. However, failure to obtain the required documents prior to the work beginning shall not waive the Contractor's obligation to provide them. The Owner reserves the right to require complete, certified copies of all required insurance policies, including endorsements, required by these specifications, at any time.

Certificates of Insurance and Endorsements for all policies must be signed by a person authorized by the insurer to bind coverage on its behalf, indicate the name and address of the official who will administer this contract, state that such insurance coverages have been obtained and are in full force and effect, and clearly indicate that coverage shall not be suspended, voided, canceled by either party, reduced in coverage or in limits except after thirty (30) days' prior written notice has been given to the Owner.

Commercial General Liability Endorsements must name the County of Fresno, its officers, agents and employees, individually and collectively, as additional insured, but only insofar as the operations under this Agreement are concerned; that such coverage for additional insured shall apply as primary insurance and any other insurance, or self-insurance, maintained by Owner, its officers, agents and employees, shall be excess only and not contributing with insurance provided under Contractor's policies herein.

2.41 UNCOVERING WORK

- A. This Section shall apply to any Work installed and covered up by the Contractor that is required by the Building Code or other statutory or regulatory requirement to undergo inspection or special inspection and/or testing approval by an appropriate official representing the Owner or other public authority having jurisdiction to conduct such inspection and/or testing. Work covered up by the Contractor, Contractor's Subcontractors, or Suppliers prior to inspection/special inspection and/or testing approval shall be uncovered and repaired or replaced after inspection approval at the sole expense of the Contractor. This shall apply to all labor and material needed to complete both physical and cosmetic repairs, and any additional inspection costs associated with restoring the Work.
- B. This Section also shall apply to any Work installed and covered up by the Contractor, Contractor's Subcontractors, or Suppliers that is determined by the Owner or its Project Manager, during construction or within the Warranty period, to be defective, broken, or inoperative. Work covered up by the Contractor, Contractor's Subcontractors, or Suppliers that is found to be defective, broken, or inoperative shall be uncovered and repaired or replaced at the sole expense of the Contractor. This shall apply to all labor and material needed to complete both physical and cosmetic repairs, and any additional inspection costs associated with restoring the Work.

2.42 CORRECTION OF WORK

- A. The Contractor shall promptly correct all Work rejected by the Project Manager as defective or as failing to conform to the Contract Documents, whether or not fabricated, installed, or completed. The Contractor shall submit a plan of action, within twenty-four (24) hours of notification of the rejected work by the Project Manager, for correcting the rejected work. The Contractor shall bear all costs of correcting such rejected Work, including compensation for the additional architectural and/or engineering services made necessary thereby.
- B. If, within 365 Calendar Days after the date of acceptance of the Work as specified in the Notice of Completion, or designated portion thereof, or within 365 Calendar Days after acceptance by the Owner of designated equipment, or within such longer period of time as may be prescribed by the terms of any applicable special warranty required by the Contract Documents, any of the Work is found by Owner to be defective or not in accordance with the Contract Documents, the Contractor shall correct it promptly after receipt of a written notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. This obligation shall survive both final payment for the Work or designated portion thereof and termination of the Contract. The Owner shall give such notice promptly after discovery of the condition.
- C. The Contractor shall, at his/her sole expense, remove from the site all portions of the Work that are defective or nonconforming and which have not been corrected under Articles 2.32, 2.42.A, and 2.42.B, unless the Owner waives removal.
- D. If the Contractor fails to submit a plan of action, within twenty-four (24) hours of notification of the rejected work by the Project Manager, for correcting the rejected work, or fails to correct defective or nonconforming Work as provided herein in Articles 2.32, 2.42.A, and 2.42.B, the Owner may correct it in accordance with Article 2.08.C.
- E. If the Contractor does not take action under the plan to initiate such correction of such defective or nonconforming Work within ten (10) days of written notice from the Project Manager, the Owner may remove it and may store the materials or equipment at the expense of the Contractor. If the Contractor does not pay the cost of such removal and storage within ten (10) days thereafter, the Owner may, upon ten (10) additional days' written notice, sell such Work at auction or at private sale and shall account for the proceeds thereof, after deducting all the costs that should have been borne by the Contractor, including compensation for the Project Manager, Architect, or other Professional's additional services made necessary thereby. If such proceeds of sale do not cover all costs that the Contractor should have borne, the difference shall be charged to the Contractor and an appropriate Supplemental Work Order shall be issued. If the payments then or thereafter due the Contractor are not sufficient to cover such amount, the Contractor shall pay the difference to the Owner.
- F. The Contractor shall bear the cost of making good all work of the Owner or separate contractors destroyed or damaged by such correction or removal.

- G. Nothing contained in this Section 2.42 shall be construed to establish a period of limitation with respect to any other obligation which the Contractor might have under the Contract Documents, including Section 2.32 hereof. The establishment of the time periods noted in this Section 2.42, or such longer period of time as may be prescribed by law or by the terms of any warranty required by the Contract Documents, relates only to the specific obligation of the Contractor to correct the defective or nonconforming Work, and has no relationship to the time within which the Contractor's obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the defective or nonconforming Work.

2.43 ACCEPTANCE OF DEFECTIVE OR NONCONFORMING WORK

If the Owner prefers to accept defective or nonconforming Work, the Owner may do so instead of requiring its removal and correction, in which case a Contract Change Order will be issued to reflect a reduction in the Contract Sum where appropriate and equitable. Such adjustment shall be given effect whether or not final payment has been made. The Project Manager shall determine the amount of reduction in the Contract Sum.

2.44 TERMINATION BY THE OWNER

- A. If the Contractor is adjudged bankrupt, or makes a general assignment for the benefit of creditors, or if a receiver is appointed on account of the Contractor's insolvency, or stop notices are served upon the Owner, or if the Contractor persistently or repeatedly refuses or fails, except in cases for which extension of time is provided, to supply enough properly skilled workers or proper materials, or fails to make prompt payment to Subcontractors or for materials or labor, or persistently disregards applicable laws, ordinances, rules, regulations, or orders of any public authority having jurisdiction, or otherwise is guilty of a substantial violation of a provision of the Contract Documents, and fails after written notice to commence and continue correction of such default, neglect, or violation with diligence and promptness, the Owner upon certification by the Project Manager that sufficient cause exists to justify such action, may, after an additional written notice and without prejudice to any other remedy the Owner may have, terminate the Contract and take possession of all materials, equipment, tools, construction equipment, and machinery thereon owned by the Contractor and may finish the Work by whatever methods the Owner may deem expedient. In such case, the Contractor shall not be entitled to receive any further payment until the Work is finished.
- B. If the unpaid balance of the Contract Sum exceeds the costs of finishing the Work, including compensation for the Project Manager's and Architect's additional services made necessary thereby, Contractor will only be paid for his/her actual unpaid costs from such excess. If such costs exceed the unpaid balance, the contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or to the Owner, as the case may be, shall be certified by the Project Manager, upon application, in the manner provided in Section 2.24 and this obligation for payment shall survive the termination of the Contract.

2.45 SUBSTITUTION OF MATERIALS

- A. When a specific manufacturer, trade name, or material is specified, or indicated, it is to establish a standard of quality and shall not be construed as limiting competition. The intent of the Contract Documents is to specify high-grade standard material and equipment, and it is not the intent of these Contract Documents to exclude or omit the products of any responsible manufacturer, if such products are equally acceptable in terms of quality, finish, performance, durability, and serviceability, in the judgment of the Owner and the Architect, to those specified herein. Wherever an article, or any class of materials, is specified by the trade name or by the name of any particular patentee, manufacturer, or dealer, it shall be taken as intending to mean and specify the article of material described or any other equal thereto in quality, finish, performance, durability, and serviceability, in the judgment of the Owner and the Architect, for the purpose for which it is or they are intended.
- B. If the Contractor desires to use material or equipment other than that specified, he/she shall submit a request for approval of such substitution, in writing, to DesignServices@fresnocountyca.gov by no later than ten (10) days prior to bid opening. Substitution requests will not be considered if received after the time stipulated.
- C. The Owner does not guarantee that alternative articles, components, materials, or equipment other than the item specified by trade name or other specific identification, will fit within the design parameters of the Project without alteration of the Project design by the Contractor.
- D. The Owner has the right to reject any proposed alternative material which requires alteration of the project design which impacts the safety of the public or the user of a completed facility. If the proposed alternative material requires alteration of the design of the Project or any aspect thereof, and said alterations are acceptable to the Owner, the Contractor shall be responsible for performing said alterations at no additional cost to the Owner.
- E. Submittals for approval of substitute materials shall contain sufficient detailed information, descriptive brochures, drawings, samples, or other data as is necessary to provide a detailed side-by-side comparison to the specified materials. It is the sole responsibility of the Contractor to submit complete descriptive and technical information so the Project Manager can make proper appraisal. Lack of either proper or sufficient information shall constitute cause for rejection. Reference to product data will not be acceptable.
- F. It is the Contractor's responsibility to confirm and correlate all quantities and dimensions, and coordinate with all trades whose work may be affected by the requested substitution.

2.46 REFERENCE TO STANDARDS

- A. Reference to known standards shall mean and intend the latest edition or amendment published prior to date of these Specifications, unless specifically

indicated otherwise, and to such portions of it that relate and apply directly to the material or installation called for on the Project.

- B. Where material is specified solely by reference to standard specifications, the Contractor shall, if requested by the Project Manager, submit to the Project Manager for his/her approval, data on all such material proposed to be incorporated into the Work of the Contractor, listing the name and address of the vendor, the manufacturer or producer, and the trade or brand names of such materials.

2.47 SPECIFICATIONS

- A. The Specifications are organized into Divisions, Sections, and Trade headings based on the Construction Specifications Institute's Master format and the Master format numbering system. This organization shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of the Work to be performed by any trade. The Contractor shall be responsible for examining all Sections of the Specifications for interrelated items of the Work, and for furnishing each item identified or specified.
- B. No responsibility will be assumed by the Owner, Architect, or the Project Manager for omissions or duplications by the Contractor in the completion of the Contract due to any alleged discrepancy in the arrangement of the material in these Specifications, nor shall any such segregation of work and materials operate to make the Project Manager an arbiter in defining the limits to the agreements between the Contractor and his/her Subcontractors or suppliers.
- C. The misplacement, addition, or omission of any letter, word, or punctuation mark shall in no way damage the true spirit, intent, or meaning of these Specifications.
- D. The words "shown", "indicated", "noted", "scheduled" or words of that effect shall be understood to mean that reference is made to Drawings accompanying these Specifications.
- E. Where reference herein is made to colors or finishes "as selected", the reference is to the Architect with concurrence by the Owner.

2.48 APPROVED APPLICATORS

- A. Where specific instructions in these Specifications require that a particular product and/or materials be installed and/or applied by an "approved applicator" of the manufacturer, it shall be the Contractor's responsibility to ensure that any Subcontractors used for such work be approved applicators.
- B. Contractor accordingly shall bear any and all costs, and shall reimburse Owner for any such costs incurred by Owner, resulting from Contractor's failure to insure the use of an "approved applicator".

2.49 DELIVERY AND STORAGE OF MATERIALS

- A. Deliver all manufactured materials in the original packages, containers, or bundles (with the seals intact), bearing the name or identification mark of all manufacturers.
- B. Deliver fabrications in as large assemblies as practicable and where specified to be shop-primed or shop-finished; they shall be packaged or crated as required to preserve such priming or finish intact and free from abrasion.
- C. Store all materials in such manner as necessary to properly protect same from damage, as materials or equipment damaged by handling, weather, dirt or from any other cause will not be acceptable.
- D. Store materials so as to cause no obstructions (i.e. stored off all sidewalks and other walkways, roadways, and underground services). The Contractor shall be responsible for protecting from damage all material and equipment furnished under the Contract.

2.50 QUALITY OF WORK

- A. Where not more specifically described in any of the various Sections of these Specifications, the quality of work shall conform to all of the methods and operations of best standards and accepted practices of the trade or trades involved, and shall include all items of fabrication, construction, or installation regularly furnished or required for completion of the work (including any finish), and for successful operation as intended of the Project and the component thereof corresponding to that work.
- B. All Work shall be executed by mechanics skilled in their respective lines of work.
- C. When completed, all parts shall have been durably and substantially built and shall present a neat, finished appearance.

2.51 HOURS OF WORK

- A. Eight (8) hours of labor shall constitute a legal day's work upon all work done hereunder, and it is expressly stipulated that no worker employed at any time by the Contractor, or by a Subcontractor under this Contract, upon the Work, shall be required or permitted to work thereon more than eight (8) hours in any one (1) calendar day and forty (40) hours in any one (1) calendar week, except as provided in Sections 1810-1815 inclusive, of the Labor Code of the State of California, all the provisions of which are deemed to be incorporated herein as if set forth in full; and it is further expressly stipulated that for each and every violation of said last named stipulation, said Contractor shall forfeit, as a penalty to the Owner, fifty dollars (\$50.00) for each worker employed by the Contractor in the execution of this Contract, for each calendar day during which said worker is required or permitted to labor more than eight (8) hours in any one (1) calendar day and forty (40) hours in any one (1) calendar week in violation of any of said provisions of the Labor Code.

- C. Notwithstanding the above stipulations, pursuant to Section 1815 of the Labor Code, work performed by employees of contractors in excess of eight (8) hours per day and forty (40) hours during any one (1) week shall be permitted on the Project upon compensation for all hours worked in excess of eight (8) hours per day at not less than one and a half (1 1/2) times the basic rate of pay.

2.52 WAGE RATES AND RELATED LABOR COMPLIANCE REQUIREMENTS

- A. This Project is subject to compliance monitoring and enforcement by the Department of Industrial Relations (DIR), including the obligation to submit certified payroll records directly to the DIR Compliance Monitoring Unit (CMU) at least monthly using the CMU's eCPR system. Detailed information may be obtained on the State of California's Department of Industrial Relations website, www.dir.ca.gov/dlse/cmu/CMU.

The Contractor shall also submit certified payroll records of the Contractor, Subcontractors, and all Sub-subcontractors of any tier to the Inspector of Record at least monthly.

- B. Contractor shall, and shall cause each of its Subcontractors (as defined in Labor Code section 1722.1) to provide written proof that they are currently registered with the California Department of Industrial Relations at the time of bid submittal, and have paid the applicable annual fee and are thereby qualified to submit a bid and to perform public work pursuant to Labor Code section 1725.5, prior to award of this Contract or any subcontract hereunder. No bid shall be accepted, nor shall this Contract or any subcontract hereunder, be entered into without such proof.
- C. Pursuant to Section 1770-1780 of the Labor Code of the State of California, the Director of the Department of Industrial Relations has determined the general prevailing rates of wages and rates for legal holidays and overtime in the locality in which this work is to be performed, which under Labor Code Section 1773.1 are deemed to include employer payments for health and welfare, pension, vacation, travel time, and subsistence pay, and apprenticeship or other authorized training programs, for each craft or type of worker or mechanic needed to perform this contract. Said wage rates are available only at the Fresno County Department of Public Works and Planning, Design Division, and will be made available to any interested person upon request. Minimum wage rates for this Project, as predetermined by the Secretary of Labor, are set forth in the Special Provisions. If there is a difference between the minimum wage rates predetermined by the Secretary of Labor and the Prevailing Wage Rates predetermined by the Director of the Department of Industrial Relations of the State of California for similar classifications of labor, the contractor and his subcontractors shall pay not less than the higher wage rate.
- D. It shall be mandatory upon the Contractor to whom the Contract is awarded, and upon any Subcontractor under him/her, to pay not less than the said specified rates to all laborers, workers, and mechanics employed by them in the execution of the Contract, and to pay all laborers, workers, and mechanics not less often than once weekly. The Contractor to whom the Contract is awarded shall post a copy of the determination of prevailing wages at the job

site. The Contractor shall require all Subcontractors to comply with Sections 1770-1780 of the Labor Code of the State of California and shall insert into every subcontract the requirements contained therein.

- E. The Contractor shall comply with Labor Code Section 1775. In accordance with said Section 1775, it is hereby further agreed that the Contractor shall forfeit to the Owner, as a penalty, fifty dollars (\$50.00) for each laborer, worker, or mechanic employed for each calendar day or portion thereof, who is paid less than the said stipulated rates for any work done under the Contract, by him/her, or by any Subcontractor under him/her. The difference between said stipulated rates and the amount paid to each worker for each calendar day or portion thereof for which each worker was paid less than said stipulated rate, shall be paid to each worker by the Contractor. The Contractor, and each Subcontractor, shall keep or cause to be kept an accurate record showing the name, address, social security number, work classification, straight time and overtime hours worked each day and week, and the actual per diem wages paid to each journeyman, apprentice, worker or other employee employed by him/her in connection with the public work. The records shall be open at all reasonable hours to the inspection of the Owner, to its officers and agents, and to the Division of Labor Law Enforcement of the State Department of Industrial Relations, its deputies and agents, or as otherwise provided by applicable law (including but not limited to Labor Code 1776).
- F. In case it becomes necessary for the Contractor or any Subcontractor to employ on the Work under this Contract any person in a trade or occupation (except executive, supervisory, administrative, clerical, or other non-manual workers as such) for which no minimum wage rate is specified, the Contractor shall immediately notify the Owner, who shall promptly thereafter determine the prevailing rate for such additional trade or occupation from the time of the initial employment of the person affected and during the continuance of such employment.

2.53 APPLICATION OF HIGHEST STANDARDS AND REQUIREMENTS

Whenever two (2) or more standards or requirements appear in these General Conditions or in any other part of the Contract Documents that form the Contract, the highest standard or requirement shall be applied and followed in the performance under this Contract.

2.54 NONDISCRIMINATION IN EMPLOYMENT

Contractor shall comply with all Federal and State Laws prohibiting discrimination in employment, including the following:

- A. California Labor Code Section 1735, which prohibits discrimination in employment on any basis listed in subdivision (a) of Section 12940 of the Government Code, as those bases are defined in Sections 12926 and 12926.1 of the Government Code, except as otherwise provided in Section 12940 of the Government Code, and applies to all employers, employment agencies and labor organizations.

- B. Title VII of the Federal 1964 Civil Rights Act (42 U.S.C. Section 2000e - 2000e - 17) which prohibits employment discrimination on the basis of race, color, sex, religion, or national origin, and applies to all employers that employ at least fifteen (15) workers during each working day in each of twenty (20) or more calendar weeks in the current or preceding year.
- C. In addition to these two (2) laws of general application listed in the immediately preceding paragraphs A and B, there are other Federal and State laws that prohibit employment discrimination in particular cases.
- D. The Owner is an Affirmative Action Employer and expects all of its contractors and suppliers to familiarize themselves with, and comply with, all applicable laws relating to employment discrimination.
- E. To the extent required by law, the Contractor shall meet all requirements of law relating to the participation of minority, women, and disabled veteran business enterprise contracting goals, and shall comply with Public Contract Code 10115 et seq. and all applicable regulations. Contractor further agrees that, when required, Contractor shall ensure compliance by all Subcontractors and shall complete all forms required by all agencies exercising jurisdiction over the Project.

2.55 APPRENTICES

- A. Pursuant to Sections 1770-1780 of the Labor Code of the State of California, the Director of the Department of Industrial Relations has determined the general prevailing rate of wages in the locality for each craft or type of worker needed to execute the work. Said wage rates pursuant to Section 1773.2 of the Labor Code are on file with the Clerk of the Fresno County Board of Supervisors, and will be made available to any interested person on request. A copy of this wage scale may also be obtained at the following Web Site: <https://www.dir.ca.gov/OPRL/>.
- B. Pursuant to Section 1775 of the Labor Code of the State of California, nothing in this Article shall prevent the employment of properly registered apprentices upon public works. Every such apprentice shall be paid the standard wage paid to apprentices under the regulations of the craft or trade at which he/she is employed, and shall be employed only at the work of the craft or trade to which he/she is registered.
- C. Only apprentices, as defined in Section 3077, who are in training under apprenticeship standards and written apprentice agreements under Chapter 4 (commencing at Section 3070), Division 3, of the Labor Code, are eligible to be employed on public works. The employment and training of each apprentice shall be in accordance with the provisions of the apprenticeship standards and apprentice agreements under which he/she is training.

2.56 PROVISIONS REQUIRED BY LAW DEEMED INSERTED

Every provision of law and clause required by law to be inserted in this contract shall be deemed to be inserted, and this contract shall be read and enforced as though it were included, and if through mistake or otherwise, any provision is not inserted or is not correctly inserted, upon application of either party the contract shall be amended to make the insertion or correction.

2.57 DRUG-FREE WORKPLACE CERTIFICATION

- A. The Contractor shall comply with Government Code Section 8355 in matters relating to providing a drug-free workplace.
- B. The Contractor shall publish a statement notifying employees that unlawful manufacture, distribution, dispensation, possession, or use of controlled substance is prohibited, and specifying actions to be taken against employees for violations, as required by Government Code Section 8355(a).
- C. The Contractor shall establish a Drug-Free Awareness Program as required by Government Code 8355(a)(2), to inform employees about all of the following:
 - 1. The dangers of drug abuse in the workplace,
 - 2. The Contractor's policy for maintaining a drug-free workplace,
 - 3. Any available counseling, rehabilitation, and employee assistance programs,
 - 4. Penalties that may be imposed upon employees for drug abuse violations.
- D. Provide as required by Government Code 8355(c), that everyone who provides work under the Agreement:
 - 1. Will receive a copy of the company's drug-free policy statement, and
 - 2. Will agree to abide by the terms of the Contractor's statement as a condition of employment on the contract.

2.58 BUILDING PERMIT AND OTHER PERMITS

The Building permit shall be obtained and paid for by the Owner. All other required permits are the responsibility of the Contractor to obtain. Fees for all other required permits shall be reimbursed to the Contractor at actual cost when the County is presented with a valid receipt.

2.59 CODES AND REGULATIONS

All work, materials, and equipment shall be in full compliance with the California Building Code; California Plumbing Code; California Electrical Code; California Mechanical Code; California Fire Code; California Energy Code; as those codes may be amended from time to time; Cal/OSHA Safety Regulations; and all Federal, State, and Local laws, ordinances, regulations and Fresno County Charter provisions in effect and applicable in the performance of the work.

END OF SECTION

SECTION 012500 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for substitutions.
- B. Related Requirements:
 - 1. Section 016000 "Product Requirements" for requirements for submitting comparable product submittals for products by listed manufacturers.

1.2 DEFINITIONS

- A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents.
 - 1. Substitutions for Cause: Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product, regulatory changes, or unavailability of required warranty terms.
 - 2. Substitutions for Convenience: Changes proposed by Contractor or Owner that are not required to meet other Project requirements but may offer advantage to Contractor or Owner.

1.3 ACTION SUBMITTALS

- A. Substitution Requests: Submit documentation identifying product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Substitution Request Form: Use form acceptable to Architect.
 - 2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
 - a. Statement indicating why specified product or fabrication or installation method cannot be provided, if applicable.
 - b. Coordination of information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors that will be necessary to accommodate proposed substitution.
 - c. Detailed comparison of significant qualities of proposed substitutions with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes, such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.

- d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
 - e. Samples, where applicable or requested.
 - f. Certificates and qualification data, where applicable or requested.
 - g. Material test reports from a qualified testing agency, indicating and interpreting test results for compliance with requirements indicated.
 - h. Research reports evidencing compliance with building code in effect for Project, from ICC-ES.
 - i. Detailed comparison of Contractor's construction schedule using proposed substitutions with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
 - j. Cost information, including a proposal of change, if any, in the Contract Sum.
 - k. Contractor's certification that proposed substitution complies with requirements in the Contract Documents, except as indicated in substitution request, is compatible with related materials and is appropriate for applications indicated.
 - l. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within seven days of receipt of a request for substitution. Architect will notify Contractor through Construction Manager of acceptance or rejection of proposed substitution within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
- a. Forms of Acceptance: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.

1.4 QUALITY ASSURANCE

- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.

1.5 PROCEDURES

- A. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

1.6 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately on discovery of

need for change, but not later than 15 days prior to time required for preparation and review of related submittals.

1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
 - a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - b. Substitution request is fully documented and properly submitted.
 - c. Requested substitution will not adversely affect Contractor's construction schedule.
 - d. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - e. Requested substitution is compatible with other portions of the Work.
 - f. Requested substitution has been coordinated with other portions of the Work.
 - g. Requested substitution provides specified warranty.
 - h. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

B. Substitutions for Convenience:

1. Architect will consider requests for substitution if received within 60 days after the Notice to Proceed. Requests received after that time may be considered or rejected at discretion of Architect.
 - a. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
 - 1) Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
 - 2) Requested substitution does not require extensive revisions to the Contract Documents.
 - 3) Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - 4) Substitution request is fully documented and properly submitted.
 - 5) Requested substitution will not adversely affect Contractor's construction schedule.
 - 6) Requested substitution has received necessary approvals of authorities having jurisdiction.
 - 7) Requested substitution is compatible with other portions of the Work.

- 8) Requested substitution has been coordinated with other portions of the Work.
- 9) Requested substitution provides specified warranty.
- 10) If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

PART 2 - PRODUCTS (Not Used)
PART 3 - EXECUTION (Not Used)

END OF SECTION 012500

SECTION 013100 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative provisions for coordinating construction operations on Project, including, but not limited to, the following:
 - 1. General coordination procedures.
 - 2. Coordination drawings.
 - 3. RFIs.
 - 4. Digital project management procedures.
 - 5. Web-based Project management software package.
 - 6. Project meetings.
- B. Each contractor shall participate in coordination requirements. Certain areas of responsibility are assigned to a specific contractor.
- C. Related Requirements:
 - 1. Section 017300 "Execution" for procedures for coordinating general installation and field-engineering services, including establishment of benchmarks and control points.
 - 2. Section 017700 "Closeout Procedures" for coordinating closeout of the Contract.

1.2 DEFINITIONS

- A. RFI: Request for Information. Request from Owner, Construction Manager, Architect, or Contractor seeking information required by or clarifications of the Contract Documents.

1.3 INFORMATIONAL SUBMITTALS

- A. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:
 - 1. Name, address, telephone number, and email address of entity performing subcontract or supplying products.
 - 2. Number and title of related Specification Section(s) covered by subcontract.
 - 3. Drawing number and detail references, as appropriate, covered by subcontract.
- B. Key Personnel Names: Within 15 days of starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list

addresses, cellular telephone numbers, and e-mail addresses. Provide names, addresses, and telephone numbers of individuals assigned as alternates in the absence of individuals assigned to Project.

1. Post copies of list in Project meeting room, in temporary field office, and in prominent location in built facility. Keep list current at all times.

1.4 GENERAL COORDINATION PROCEDURES

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations included in different Sections that depend on each other for proper installation, connection, and operation.
 1. Schedule construction operations in sequence required to obtain the best results, where installation of one part of the Work depends on installation of other components, before or after its own installation.
 2. Coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair.
 3. Make adequate provisions to accommodate items scheduled for later installation.
- B. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
 1. Preparation of Contractor's construction schedule.
 2. Preparation of the schedule of values.
 3. Installation and removal of temporary facilities and controls.
 4. Delivery and processing of submittals.
 5. Progress meetings.
 6. Preinstallation conferences.
 7. Project closeout activities.
 8. Startup and adjustment of systems.

1.5 REQUEST FOR INFORMATION (RFI)

- A. General: Immediately on discovery of the need for additional information, clarification, or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.
 1. Architect will return without response those RFIs submitted to Architect by other entities controlled by Contractor.
 2. Coordinate and submit RFIs in a prompt manner to avoid delays in Contractor's work or work of subcontractors.
- B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:

1. Project name.
 2. Owner name.
 3. Owner's Project number.
 4. Name of Architect and Construction Manager.
 5. Date.
 6. Name of Contractor.
 7. RFI number, numbered sequentially.
 8. RFI subject.
 9. Specification Section number and title and related paragraphs, as appropriate.
 10. Drawing number and detail references, as appropriate.
 11. Field dimensions and conditions, as appropriate.
 12. Contractor's suggested resolution. If Contractor's suggested resolution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
 13. Contractor's signature.
 14. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
 - a. Include dimensions, thicknesses, structural grid references, and details of affected materials, assemblies, and attachments on attached sketches.
- C. RFI Forms: Software-generated form with substantially the same content as indicated above, acceptable to Architect.
1. Attachments shall be electronic files in PDF format.
- CI. Architect's and Construction Manager's Action: Architect and Construction Manager will review each RFI, determine action required, and respond. Allow seven days for Architect's response for each RFI. RFIs received by Architect or Construction Manager after 1:00 p.m. will be considered as received the following working day.
1. The following Contractor-generated RFIs will be returned without action:
 - a. Requests for approval of submittals.
 - b. Requests for approval of substitutions.
 - c. Requests for approval of Contractor's means and methods.
 - d. Requests for coordination information already indicated in the Contract Documents.
 - e. Requests for adjustments in the Contract Time or the Contract Sum.
 - f. Requests for interpretation of Architect's actions on submittals.
 - g. Incomplete RFIs or inaccurately prepared RFIs.
 2. Architect's action may include a request for additional information, in which case Architect's time for response will date from time of receipt by Architect or Construction Manager of additional information.
- CII. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log weekly. Include the following:
1. Project name.
 2. Name and address of Contractor.

3. Name and address of Architect and Construction Manager.
 4. RFI number, including RFIs that were returned without action or withdrawn.
 5. RFI description.
 6. Date the RFI was submitted.
 7. Date Architect's and Construction Manager's response was received.
 8. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.
- F. On receipt of Architect's and Construction Manager's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect and Construction Manager within three days if Contractor disagrees with response.

1.6 DIGITAL PROJECT MANAGEMENT PROCEDURES

- A. Use of Architect's Digital Data Files: Digital data files of Architect's CAD drawings will be provided by Architect for Contractor's use during construction.
1. Digital data files may be used by Contractor in preparing coordination drawings, Shop Drawings, and Project Record Drawings.
 2. Architect makes no representations as to the accuracy or completeness of digital data files as they relate to Contract Drawings.
 3. Digital Drawing Software Program: Contract Drawings are available in Autodesk AutoCAD 2024.
 4. Contractor shall execute a data licensing agreement in the form of Agreement form acceptable to Owner and Architect.
 5. The following digital data files will be furnished for each appropriate discipline:
 - a. Floor plans.
 - b. Reflected ceiling plans.
 - c. Roof plans.
 - d. Site plans.
 - e. Building Elevations.
 - f. Building Sections.
- B. PDF Document Preparation: Where PDFs are required to be submitted to Architect, prepare as follows:
1. Assemble complete submittal package into a single indexed file, incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
 2. Name file with submittal number or other unique identifier, including revision identifier.
 3. Certifications: Where digitally submitted certificates and certifications are required, provide a digital signature with digital certificate on where indicated.

1.7 PROJECT MEETINGS

- A. General: Construction Manager will schedule and conduct meetings and conferences

at Project site unless otherwise indicated.

1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times a minimum of seven days prior to meeting.
 2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
 3. Minutes: Entity responsible for conducting meeting will record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner and Architect, within three days of the meeting.
- B. Preconstruction Conference: Construction Manager will schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after execution of the Agreement.
1. Attendees: Authorized representatives of Owner, Construction Manager, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Responsibilities and personnel assignments.
 - b. Tentative construction schedule.
 - c. Critical work sequencing and long lead items.
 - d. Designation of key personnel and their duties.
 - e. Lines of communications.
 - f. Use of web-based Project software.
 - g. Procedures for processing field decisions and Change Orders.
 - h. Procedures for RFIs.
 - i. Procedures for testing and inspecting.
 - j. Procedures for processing Applications for Payment.
 - k. Distribution of the Contract Documents.
 - l. Submittal procedures.
 - m. Preparation of Record Documents.
 - n. Use of the premises and existing building.
 - o. Work restrictions.
 - p. Working hours.
 - q. Responsibility for temporary facilities and controls.
 - r. Procedures for moisture and mold control.
 - s. Procedures for disruptions and shutdowns.
 - t. Construction waste management and recycling.
 - u. Office, work, and storage areas.
 - v. Equipment deliveries and priorities.
 - w. First aid.
 - x. Security.
 - y. Progress cleaning.

3. Minutes: Entity responsible for conducting meeting will record and distribute meeting minutes.
- C. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity when required by other Sections and when required for coordination with other construction.
1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect, Construction Manager of scheduled meeting dates.
 2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
 - a. Contract Documents.
 - b. Options.
 - c. Related RFIs.
 - d. Related Change Orders.
 - e. Purchases.
 - f. Deliveries.
 - g. Submittals.
 - h. Possible conflicts.
 - i. Compatibility requirements.
 - j. Time schedules.
 - k. Weather limitations.
 - l. Manufacturer's written instructions.
 - m. Warranty requirements.
 - n. Compatibility of materials.
 - o. Acceptability of substrates.
 - p. Temporary facilities and controls.
 - q. Space and access limitations.
 - r. Regulations of authorities having jurisdiction.
 - s. Testing and inspecting requirements.
 - t. Installation procedures.
 - u. Coordination with other work.
 - v. Required performance results.
 - w. Protection of adjacent work.
 - x. Protection of construction and personnel.
 3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
 4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.
 5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
- D. Project Closeout Conference: Construction Manager will schedule and conduct a project closeout conference, at a time convenient to Owner and Architect, but no later than 90 days prior to the scheduled date of Substantial Completion.

1. Conduct the conference to review requirements and responsibilities related to Project closeout.
 2. Attendees: Authorized representatives of Owner, Construction Manager, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the meeting. Participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
 3. Agenda: Discuss items of significance that could affect or delay Project closeout, including the following:
 - a. Preparation of Record Documents.
 - b. Procedures required prior to inspection for Substantial Completion and for final inspection for acceptance.
 - c. Procedures for completing and archiving web-based Project software site data files.
 - d. Submittal of written warranties.
 - e. Requirements for preparing operations and maintenance data.
 - f. Requirements for delivery of material samples, attic stock, and spare parts.
 - g. Requirements for demonstration and training.
 - h. Preparation of Contractor's punch list.
 - i. Procedures for processing Applications for Payment at Substantial Completion and for final payment.
 - j. Submittal procedures.
 - k. Owner's partial occupancy requirements.
 - l. Installation of Owner's furniture, fixtures, and equipment.
 - m. Responsibility for removing temporary facilities and controls.
 4. Minutes: Entity conducting meeting will record and distribute meeting minutes.
- E. Progress Meetings: Construction Manager will conduct progress meetings at weekly intervals.
1. Attendees: In addition to representatives of Owner, Construction Manager, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
 - a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.

- 1) Review schedule for next period.
- b. Review present and future needs of each entity present, including the following:
 - 1) Interface requirements.
 - 2) Sequence of operations.
 - 3) Status of submittals.
 - 4) Deliveries.
 - 5) Off-site fabrication.
 - 6) Access.
 - 7) Site use.
 - 8) Temporary facilities and controls.
 - 9) Progress cleaning.
 - 10) Quality and work standards.
 - 11) Status of correction of deficient items.
 - 12) Field observations.
 - 13) Status of RFIs.
 - 14) Status of Proposal Requests.
 - 15) Pending changes.
 - 16) Status of Change Orders.
 - 17) Pending claims and disputes.
 - 18) Documentation of information for payment requests.
3. Minutes: Entity responsible for conducting the meeting will record and distribute the meeting minutes to each party present and to parties requiring information.
 - a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting, where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 - PRODUCTS (Not Used)
PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Submittal schedule requirements.
2. Administrative and procedural requirements for submittals.

B. Related Requirements:

1. Section 017700 "Closeout Procedures" for submitting closeout submittals and maintenance material submittals.
2. Section 017823 "Operation and Maintenance Data" for submitting operation and maintenance manuals.
3. Section 017839 "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.
4. Section 017900 "Demonstration and Training" for submitting video recordings of demonstration of equipment and training of Owner's personnel.

1.2 DEFINITIONS

- A. Action Submittals: Written and graphic information and physical samples that require Architect's and Construction Manager's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."
- B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's and Construction Manager's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."

1.3 SUBMITTAL SCHEDULE

- A. Submittal Schedule: Submit, as an action submittal, a list of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or revisions to submittals noted by Architect and Construction Manager and additional time for handling and reviewing submittals required by those corrections.
1. Coordinate submittal schedule with list of subcontracts, the schedule of values, and Contractor's construction schedule.
 2. Format: Arrange the following information in a tabular format:
 - a. Scheduled date for first submittal.

- b. Specification Section number and title.
- c. Submittal Category: Action; informational.
- d. Name of subcontractor.
- e. Description of the Work covered.
- f. Scheduled date for Architect's and Construction Manager's final release or approval.
- g. Scheduled dates for purchasing.
- h. Scheduled date of fabrication.
- i. Scheduled dates for installation.
- j. Activity or event number.

1.4 SUBMITTAL FORMATS

A. Submittal Information: Include the following information in each submittal:

- 1. Project name.
- 2. Date.
- 3. Name of Architect.
- 4. Name of Construction Manager.
- 5. Name of Contractor.
- 6. Name of firm or entity that prepared submittal.
- 7. Names of subcontractor, manufacturer, and supplier.
- 8. Unique submittal number, including revision identifier. Include Specification Section number with sequential alphanumeric identifier and alphanumeric suffix for resubmittals.
- 9. Category and type of submittal.
- 10. Submittal purpose and description.
- 11. Number and title of Specification Section, with paragraph number and generic name for each of multiple items.
- 12. Drawing number and detail references, as appropriate.
- 13. Indication of full or partial submittal.
- 14. Location(s) where product is to be installed, as appropriate.
- 15. Other necessary identification.
- 16. Remarks.
- 17. Signature of transmitter.

B. Options: Identify options requiring selection by Architect.

C. Deviations and Additional Information: On each submittal, clearly indicate deviations from requirements in the Contract Documents, including minor variations and limitations; include relevant additional information and revisions, other than those requested by Architect and Construction Manager on previous submittals. Indicate by highlighting on each submittal or noting on attached separate sheet.

D. Electronic Submittals: Prepare submittals as PDF package, incorporating complete information into each PDF file. Name PDF file with submittal number.

1.5 SUBMITTAL PROCEDURES

- A. Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.
 - 1. Email: Prepare submittals as PDF package and transmit to Architect by sending via email. Include PDF transmittal form. Include information in email subject line as requested by Architect.
 - a. Architect, through Construction Manager, will return annotated file. Annotate and retain one copy of file as a digital Project Record Document file.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - 2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
 - 3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.
 - 4. Coordinate transmittal of submittals for related parts of the Work specified in different Sections, so processing will not be delayed because of need to review submittals concurrently for coordination.
 - a. Architect and Construction Manager reserve the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Construction Manager's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
 - 1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Construction Manager will advise Contractor when a submittal being processed must be delayed for coordination.
 - 2. Intermediate Review: If intermediate submittal is necessary, process it in same manner as initial submittal.
 - 3. Resubmittal Review: Allow 15 days for review of each resubmittal.
 - 4. Sequential Review: Where sequential review of submittals by Architect's consultants, Owner, or other parties is indicated, allow 21 days for initial review of each submittal.
 - 5. Concurrent Consultant Review: Where the Contract Documents indicate that submittals may be transmitted simultaneously to Architect and to Architect's consultants, allow 15 days for review of each submittal. Submittal will be returned to Construction Manager, through Architect, before being returned to Contractor.

- a. Submit one copy of submittal to concurrent reviewer in addition to specified number of copies to Architect and Construction Manager.
- D. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.
1. Note date and content of previous submittal.
 2. Note date and content of revision in label or title block, and clearly indicate extent of revision.
 3. Resubmit submittals until they are marked with approval notation from Architect's and Construction Manager's action stamp.
- E. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- F. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from Architect's and Construction Manager's action stamp.

1.6 SUBMITTAL REQUIREMENTS

- A. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
1. If information must be specially prepared for submittal because standard published data are unsuitable for use, submit as Shop Drawings, not as Product Data.
 2. Mark each copy of each submittal to show which products and options are applicable.
 3. Include the following information, as applicable:
 - a. Manufacturer's catalog cuts.
 - b. Manufacturer's product specifications.
 - c. Standard color charts.
 - d. Statement of compliance with specified referenced standards.
 - e. Testing by recognized testing agency.
 - f. Application of testing agency labels and seals.
 - g. Notation of coordination requirements.
 - h. Availability and delivery time information.
 4. For equipment, include the following in addition to the above, as applicable:
 - a. Wiring diagrams that show factory-installed wiring.
 - b. Printed performance curves.
 - c. Operational range diagrams.
 - d. Clearances required to other construction, if not indicated on accompanying Shop Drawings.
 5. Submit Product Data before Shop Drawings, and before or concurrently with

Samples.

- B. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data unless submittal based on Architect's digital data drawing files is otherwise permitted.
 - 1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
 - a. Identification of products.
 - b. Schedules.
 - c. Compliance with specified standards.
 - d. Notation of coordination requirements.
 - e. Notation of dimensions established by field measurement.
 - f. Relationship and attachment to adjoining construction clearly indicated.
 - g. Seal and signature of professional engineer if specified.
- C. Samples: Submit Samples for review of type, color, pattern, and texture for a check of these characteristics with other materials.
 - 1. Transmit Samples that contain multiple, related components, such as accessories together in one submittal package.
 - 2. Identification: Permanently attach label on unexposed side of Samples that includes the following:
 - a. Project name and submittal number.
 - b. Generic description of Sample.
 - c. Product name and name of manufacturer.
 - d. Sample source.
 - e. Number and title of applicable Specification Section.
 - f. Specification paragraph number and generic name of each item.
 - 3. Email Transmittal: Provide PDF transmittal. Include digital image file illustrating Sample characteristics and identification information for record.
 - 4. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
 - a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
 - b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
 - 5. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units, showing the full range of colors, textures, and patterns available.
 - a. Number of Samples: Submit one full set(s) of available choices where

color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect, through Construction Manager, will return submittal with options selected.

6. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.
 - a. Number of Samples: Submit three sets of Samples. Architect and Construction Manager will retain two Sample sets; remainder will be returned. Mark up and retain one returned Sample set as a project record Sample.
 - 1) Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.
 - 2) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- D. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:
 1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
 2. Manufacturer and product name, and model number if applicable.
 3. Number and name of room or space.
 4. Location within room or space.
- E. Design Data: Prepare and submit written and graphic information indicating compliance with indicated performance and design criteria in individual Specification Sections. Include list of assumptions and summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Number each page of submittal.
- F. Certificates:
 1. Certificates and Certifications Submittals: Submit a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity. Provide a notarized signature where indicated.
 2. Installer Certificates: Submit written statements on manufacturer's letterhead, certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.

3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead, certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
4. Material Certificates: Submit written statements on manufacturer's letterhead, certifying that material complies with requirements in the Contract Documents.
5. Product Certificates: Submit written statements on manufacturer's letterhead, certifying that product complies with requirements in the Contract Documents.
6. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of AWS B2.1/B2.1M on AWS forms. Include names of firms and personnel certified.

G. Test and Research Reports:

1. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for substrate preparation and primers required.
2. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
3. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
4. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
5. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
6. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:
 - a. Name of evaluation organization.
 - b. Date of evaluation.
 - c. Time period when report is in effect.
 - d. Product and manufacturers' names.
 - e. Description of product.
 - f. Test procedures and results.
 - g. Limitations of use.

1.7 DELEGATED DESIGN SERVICES

- A. Performance and Design Criteria: Where professional design services or certifications

by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.

1. If criteria indicated are insufficient to perform services or certification required, submit a written request for additional information to Architect.
- B. Delegated Design Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally signed PDF file paper copies of certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.
 1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

1.8 CONTRACTOR'S REVIEW

- A. Action Submittals and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect and Construction Manager.
- B. Contractor's Approval: Indicate Contractor's approval for each submittal with a uniform approval stamp. Include name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.
 1. Architect and Construction Manager will not review submittals received from Contractor that do not have Contractor's review and approval.

1.9 ARCHITECT'S AND CONSTRUCTION MANAGER'S REVIEW

- A. Action Submittals: Architect and Construction Manager will review each submittal, indicate corrections or revisions required, and return.
 1. PDF Submittals: Architect and Construction Manager will indicate, via markup on each submittal, the appropriate action.
- B. Informational Submittals: Architect and Construction Manager will review each submittal and will not return it, or will return it if it does not comply with requirements. Architect and Construction Manager will forward each submittal to appropriate party.
- C. Partial submittals prepared for a portion of the Work will be reviewed when use of partial submittals has received prior approval from Architect and Construction Manager.
- D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be

returned for resubmittal without review.

- E. Architect and Construction Manager will discard submittals received from sources other than Contractor.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013300

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspection services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
 - 1. Specific quality-assurance and quality-control requirements for individual work results are specified in their respective Specification Sections. Requirements in individual Sections may also cover production of standard products.
 - 2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and quality-control procedures that facilitate compliance with the Contract Document requirements.
 - 3. Requirements for Contractor to provide quality-assurance and quality-control services required by Architect, Owner, Construction Manager, or authorities having jurisdiction are not limited by provisions of this Section.

1.2 DEFINITIONS

- A. Experienced: When used with an entity or individual, "experienced," unless otherwise further described, means having successfully completed a minimum of three previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.
- B. Field Quality-Control Tests and Inspections: Tests and inspections that are performed on-site for installation of the Work and for completed Work.
- C. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, subcontractor, or sub-subcontractor, to perform a particular construction operation, including installation, erection, application, assembly, and similar operations.
 - 1. Use of trade-specific terminology in referring to a Work result does not require that certain construction activities specified apply exclusively to specific trade(s).
- D. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria. Unless otherwise indicated, copies of reports of tests or inspections performed for other than the Project do not meet this definition.
- E. Product Tests: Tests and inspections that are performed by a nationally recognized testing laboratory (NRTL) in accordance with 29 CFR 1910.7, by a testing agency

accredited in accordance with NIST's National Voluntary Laboratory Accreditation Program (NVLAP), or by a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.

- F. Source Quality-Control Tests and Inspections: Tests and inspections that are performed at the source (e.g., plant, mill, factory, or shop).
- G. Testing Agency: An entity engaged to perform specific tests, inspections, or both. The term "testing laboratory" has the same meaning as the term "testing agency."
- H. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work, to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- I. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work, to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Contractor's quality-control services do not include contract administration activities performed by Architect or Construction Manager.

1.3 CONFLICTING REQUIREMENTS

- A. Conflicting Standards and Other Requirements: If compliance with two or more standards or requirements is specified and the standards or requirements establish different or conflicting requirements for minimum quantities or quality levels, inform the Architect regarding the conflict and obtain clarification prior to proceeding with the Work. Refer conflicting requirements that are different, but apparently equal, to Architect for clarification before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified is the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Contractor's quality-control personnel.
- B. Contractor's Statement of Responsibility: When required by authorities having jurisdiction, submit copy of written statement of responsibility submitted to authorities having jurisdiction before starting work on the following systems:
 - 1. Seismic-force-resisting system, designated seismic system, or component listed in the Statement of Special Inspections.
 - 2. Primary wind-force-resisting system or a wind-resisting component listed in the Statement of Special Inspections.

- C. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.
- D. Schedule of Tests and Inspections: Prepare in tabular form and include the following:
 - 1. Specification Section number and title.
 - 2. Entity responsible for performing tests and inspections.
 - 3. Description of test and inspection.
 - 4. Identification of applicable standards.
 - 5. Identification of test and inspection methods.
 - 6. Number of tests and inspections required.
 - 7. Time schedule or time span for tests and inspections.
 - 8. Requirements for obtaining samples.
 - 9. Unique characteristics of each quality-control service.
- E. Reports: Prepare and submit certified written reports and documents as specified.
- F. Permits, Licenses, and Certificates: For Owner's record, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents established for compliance with standards and regulations bearing on performance of the Work.

1.5 REPORTS AND DOCUMENTS

- A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:
 - 1. Date of issue.
 - 2. Project title and number.
 - 3. Name, address, telephone number, and email address of testing agency.
 - 4. Dates and locations of samples and tests or inspections.
 - 5. Names of individuals making tests and inspections.
 - 6. Description of the Work and test and inspection method.
 - 7. Identification of product and Specification Section.
 - 8. Complete test or inspection data.
 - 9. Test and inspection results and an interpretation of test results.
 - 10. Record of temperature and weather conditions at time of sample-taking and testing and inspection.
 - 11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
 - 12. Name and signature of laboratory inspector.
 - 13. Recommendations on retesting and reinspecting.
- B. Manufacturer's Technical Representative's Field Reports: Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:

1. Name, address, telephone number, and email address of technical representative making report.
 2. Statement on condition of substrates and their acceptability for installation of product.
 3. Statement that products at Project site comply with requirements.
 4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
 5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 6. Statement of whether conditions, products, and installation will affect warranty.
 7. Other required items indicated in individual Specification Sections.
- C. Factory-Authorized Service Representative's Reports: Prepare written information documenting manufacturer's factory-authorized service representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, telephone number, and email address of factory-authorized service representative making report.
 2. Statement that equipment complies with requirements.
 3. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 4. Statement of whether conditions, products, and installation will affect warranty.
 5. Other required items indicated in individual Specification Sections.

1.6 QUALITY ASSURANCE

- A. Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.
- B. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units. As applicable, procure products from manufacturers able to meet qualification requirements, warranty requirements, and technical or factory-authorized service representative requirements.
- C. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- D. Installer Qualifications: A firm or individual experienced in installing, erecting, applying, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.
- E. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that is similar in material, design, and extent to those indicated for this Project.

- F. Specialists: Certain Specification Sections require that specific construction activities be performed by entities who are recognized experts in those operations. Specialists will satisfy qualification requirements indicated and engage in the activities indicated.
 - 1. Requirements of authorities having jurisdiction supersede requirements for specialists.
- G. Testing and Inspecting Agency Qualifications: An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspection indicated, as documented in accordance with ASTM E329, and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.
- H. Manufacturer's Technical Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- I. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect, demonstrate, repair, and perform service on installations of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- J. Preconstruction Testing: Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following:
 - 1. Contractor's Responsibilities:
 - a. Provide test specimens representative of proposed products and construction.
 - b. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
 - c. Provide sizes and configurations of test assemblies, mockups, and laboratory mockups to adequately demonstrate capability of products to comply with performance requirements.
 - d. When testing is complete, remove test specimens and test assemblies; do not reuse products on Project.
 - 2. Testing Agency Responsibilities: Submit a certified written report of each test, inspection, and similar quality-assurance service to Architect, through Construction Manager, with copy to Contractor. Interpret tests and inspections, and state in each report whether tested and inspected Work complies with or deviates from the Contract Documents.

1.7 QUALITY CONTROL

- A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.

1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspection they are engaged to perform.
 2. Costs for retesting and reinspecting construction that replaces or is necessitated by Work that failed to comply with the Contract Documents will be charged to Contractor.
- B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities, whether specified or not, to verify and document that the Work complies with requirements.
1. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.
 2. Engage a qualified testing agency to perform quality-control services.
 - a. Contractor will not employ same entity engaged by Owner, unless agreed to in writing by Owner.
 3. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspection will be performed.
 4. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
 5. Testing and inspection requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
 6. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- D. Testing Agency Responsibilities: Cooperate with Architect, Construction Manager, and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Architect, Construction Manager, and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
 2. Determine the locations from which test samples will be taken and in which in-situ tests are conducted.
 3. Conduct and interpret tests and inspections, and state in each report whether tested and inspected Work complies with or deviates from requirements.
 4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
 5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform duties of Contractor.
- E. Manufacturer's Field Services: Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation,

including service connections. Report results in writing as specified in Section 013300 "Submittal Procedures."

- F. Manufacturer's Technical Services: Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.
- G. Contractor's Associated Requirements and Services: Cooperate with agencies and representatives performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
 - 1. Access to the Work.
 - 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 - 3. Adequate quantities of representative samples of materials that require testing and inspection. Assist agency in obtaining samples.
 - 4. Facilities for storage and field curing of test samples.
 - 5. Delivery of samples to testing agencies.
 - 6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
 - 7. Security and protection for samples and for testing and inspection equipment at Project site.
- H. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and quality-control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspection.
 - 1. Schedule times for tests, inspections, obtaining samples, and similar activities.
- I. Schedule of Tests and Inspections: Prepare a schedule of tests, inspections, and similar quality-control services required by the Contract Documents. Coordinate and submit concurrently with Contractor's Construction Schedule. Update and submit with each Application for Payment.
 - 1. Schedule Contents: Include tests, inspections, and quality-control services, including Contractor- and Owner-retained services, commissioning activities, and other Project-required services paid for by other entities.
 - 2. Distribution: Distribute schedule to Owner, Architect, Construction Manager, testing agencies, and each party involved in performance of portions of the Work where tests and inspections are required.

1.8 SPECIAL TESTS AND INSPECTIONS

- A. Special Tests and Inspections: Owner will engage a qualified special inspector to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner, and as follows:

1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures, and reviewing the completeness and adequacy of those procedures to perform the Work.
2. Notifying Architect, Construction Manager, and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
3. Submitting a certified written report of each test, inspection, and similar quality-control service to Architect, through Construction Manager, with copy to Contractor and to authorities having jurisdiction.
4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
5. Interpreting tests and inspections, and stating in each report whether tested and inspected Work complies with or deviates from the Contract Documents.
6. Retesting and reinspecting corrected Work.

PART 2 - PRODUCTS (Not Used)
PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

- A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:
 1. Date test or inspection was conducted.
 2. Description of the Work tested or inspected.
 3. Date test or inspection results were transmitted to Architect.
 4. Identification of testing agency or special inspector conducting test or inspection.
- B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Architect's and Construction Manager's reference during normal working hours.
 1. Submit log at Project closeout as part of Project Record Documents.

3.2 REPAIR AND PROTECTION

- A. General: On completion of testing, inspection, sample-taking, and similar services, repair damaged construction and restore substrates and finishes.
 1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Section 017300 "Execution."
- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of

responsibility for quality-control services.

END OF SECTION 014000

SECTION 014200 - REFERENCES

PART 1 - GENERAL

1.1 DEFINITIONS

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.
- C. "Directed": A command or instruction by Architect. Other terms, including "requested," "authorized," "selected," "required," and "permitted," have the same meaning as "directed."
- D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms, including "shown," "noted," "scheduled," and "specified," have the same meaning as "indicated."
- E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Unload, temporarily store, unpack, assemble, erect, place, anchor, apply, work to dimension, finish, cure, protect, clean, and similar operations at Project site.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

1.2 INDUSTRY STANDARDS

- A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.
- B. Publication Dates: Comply with standards in effect as of date of the Contract Documents unless otherwise indicated.
 - 1. For standards referenced by applicable building codes, comply with dates of standards as listed in building codes.

- C. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.
1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

1.3 ABBREVIATIONS AND ACRONYMS

- A. Industry Organizations, List: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they are to mean the recognized name of the entities in the following list. The information in this list is subject to change and is believed to be accurate as of the date of the Contract Documents.
1. AABC - Associated Air Balance Council; www.aabc.com.
 2. AAMA - American Architectural Manufacturers Association; (see FGIA).
 3. AATCC - American Association of Textile Chemists and Colorists; www.aatcc.org.
 4. ACI - American Concrete Institute; www.concrete.org.
 5. ACP - American Clean Power; (Formerly: American Wind Energy Association); www.cleanpower.org.
 6. ACPA - American Concrete Pipe Association; www.concretepipe.org.
 7. AEIC - Association of Edison Illuminating Companies, Inc. (The); www.aeic.org.
 8. AF&PA - American Forest & Paper Association; www.afandpa.org.
 9. AHAM - Association of Home Appliance Manufacturers; www.aham.org.
 10. AHRI - Air-Conditioning, Heating, and Refrigeration Institute (The); www.ahrinet.org.
 11. AI - Asphalt Institute; www.asphaltinstitute.org.
 12. AIA - American Institute of Architects (The); www.aia.org.
 13. AISC - American Institute of Steel Construction; www.aisc.org.
 14. AISI - American Iron and Steel Institute; www.steel.org.
 15. AITC - American Institute of Timber Construction; (see PLIB).
 16. AMCA - Air Movement and Control Association International, Inc.; www.amca.org.
 17. AMPP - Association for Materials Protection and Performance; www.ampp.org.
 18. ANSI - American National Standards Institute; www.ansi.org.
 19. APA - APA - The Engineered Wood Association; www.apawood.org.
 20. ASA - Acoustical Society of America; www.acousticalsociety.org.
 21. ASCE - American Society of Civil Engineers; www.asce.org.
 22. ASCE/SEI - American Society of Civil Engineers/Structural Engineering Institute; (see ASCE).
 23. ASHRAE - American Society of Heating, Refrigerating and Air-Conditioning Engineers; www.ashrae.org.
 24. ASME - ASME International; American Society of Mechanical Engineers (The); www.asme.org.
 25. ASSE - ASSE International; (American Society of Sanitary Engineering); www.asse-plumbing.org.
 26. ASSP - American Society of Safety Professionals; www.assp.org.
 27. ASTM - ASTM International; www.astm.org.
 28. ATIS - Alliance for Telecommunications Industry Solutions; www.atis.org.

29. AVIXA - Audiovisual and Integrated Experience Association; www.avixa.org.
30. AWI - Architectural Woodwork Institute; www.awinet.org.
31. AWMAC - Architectural Woodwork Manufacturers Association of Canada; www.awmac.com.
32. AWWPA - American Wood Protection Association; www.awpa.com.
33. AWS - American Welding Society; www.aws.org.
34. AWWA - American Water Works Association; www.awwa.org.
35. BHMA - Builders Hardware Manufacturers Association; www.buildershardware.com.
36. BICSI - BICSI, Inc.; www.bicsi.org.
37. BIFMA - Business and Institutional Furniture Manufacturer's Association; www.bifma.org.
38. CARB - California Air Resources Board; www.arb.ca.gov.
39. CDA - Copper Development Association Inc.; www.copper.org.
40. CFFA - Chemical Fabrics and Film Association, Inc.; www.chemicalfabricsandfilm.com.
41. CFSEI - Cold-Formed Steel Engineers Institute; www.cfsei.org.
42. CISCA - Ceilings & Interior Systems Construction Association; www.cisca.org.
43. CISPI - Cast Iron Soil Pipe Institute; www.cispi.org.
44. CLFMI - Chain Link Fence Manufacturers Institute; www.chainlinkinfo.org.
45. CMHA - Concrete Masonry & Hardscape Association; (Formerly: National Concrete Masonry Association); www.masonryandhardscapes.org.
46. CPA - Composite Panel Association; www.compositepanel.org.
47. CRI - Carpet and Rug Institute (The); www.carpet-rug.org.
48. CRRC - Cool Roof Rating Council; www.coolroofs.org.
49. CRSI - Concrete Reinforcing Steel Institute; www.crsi.org.
50. CSA - CSA Group; www.csagroup.org.
51. CSI - Construction Specifications Institute (The); www.csiresources.org.
52. CTA - Consumer Technology Association; www.cta.tech.
53. CTI - Cooling Technology Institute; www.coolingtechnology.org.
54. DASMA - Door and Access Systems Manufacturers Association; www.dasma.com.
55. DHA - Decorative Hardwoods Association; www.decorativehardwoods.org.
56. DHI - Door and Hardware Institute; www.dhi.org.
57. ECIA - Electronic Components Industry Association; www.ecianow.org.
58. EJMA - Expansion Joint Manufacturers Association, Inc.; www.ejma.org.
59. EOS/ESD - EOS/ESD Association, Inc.; Electrostatic Discharge Association; www.esda.org.
60. EVO - Efficiency Valuation Organization; www.evo-world.org.
61. FCI - Fluid Controls Institute; www.fluidcontrolsinstitute.org.
62. FGIA - Fenestration and Glazing Industry Alliance; <https://fgiaonline.org>.
63. FM Approvals - FM Approvals LLC; www.fmapprovals.com.
64. FSA - Fluid Sealing Association; www.fluidsealing.com.
65. FSC - Forest Stewardship Council U.S.; www.fscus.org.
66. GA - Gypsum Association; www.gypsum.org.
67. GS - Green Seal; www.greenseal.org.
68. HI - Hydraulic Institute; www.pumps.org.
69. HMMA - Hollow Metal Manufacturers Association; (see NAAMM).
70. IAPSC - International Association of Professional Security Consultants; www.iapsc.org.
71. IAS - International Accreditation Service; www.iasonline.org.

72. ICC - International Code Council; www.iccsafe.org.
73. ICEA - Insulated Cable Engineers Association, Inc.; www.icea.net.
74. ICPA - International Cast Polymer Association (The); www.theicpa.com.
75. ICRI - International Concrete Repair Institute, Inc.; www.icri.org.
76. IEC - International Electrotechnical Commission; www.iec.ch.
77. IEEE SA - IEEE Standards Association; <https://standards.ieee.org>.
78. IES - Illuminating Engineering Society; www.ies.org.
79. IEST - Institute of Environmental Sciences and Technology; www.iest.org.
80. IGMA - Insulating Glass Manufacturers Alliance; (see FGIA).
81. Intertek - Intertek Group; www.intertek.com.
82. ISA - International Society of Automation (The); www.isa.org.
83. ISFA - International Surface Fabricators Association; www.isfanow.org.
84. ISO - International Organization for Standardization; www.iso.org.
85. ITU - International Telecommunication Union; www.itu.int.
86. LPI - Lightning Protection Institute; www.lightning.org.
87. MCA - Metal Construction Association; www.metalconstruction.org.
88. MFMA - Metal Framing Manufacturers Association, Inc.;
www.metalframingmfg.org.
89. MHI - Material Handling Industry; www.mhi.org.
90. MMPA - Moulding & Millwork Producers Association; www.wmmpa.com.
91. MPI - Master Painters Institute; www.paintinfo.com.
92. MSS - Manufacturers Standardization Society of The Valve and Fittings Industry,
Inc.; www.msshq.org.
93. NAAMM - National Association of Architectural Metal Manufacturers;
www.naamm.org.
94. NACE - NACE International; (National Association of Corrosion Engineers
International); (see AMPP).
95. NADCA - National Air Duct Cleaners Association; www.nadca.com.
96. NAIMA - North American Insulation Manufacturers Association;
www.insulationinstitute.org.
97. NBI - New Buildings Institute; www.newbuildings.org.
98. NCMA - National Concrete Masonry Association; (see CMHA).
99. NEBB - National Environmental Balancing Bureau; www.nebb.org.
100. NECA - National Electrical Contractors Association; www.necanet.org.
101. NeLMA - Northeastern Lumber Manufacturers Association; www.nelma.org.
102. NEMA - National Electrical Manufacturers Association; www.nema.org.
103. NETA - InterNational Electrical Testing Association; www.netaworld.org.
104. NFPA - National Fire Protection Association; www.nfpa.org.
105. NFPA - NFPA International; (see NFPA).
106. NFRC - National Fenestration Rating Council; www.nfrc.org.
107. NGA - National Glass Association; www.glass.org.
108. NHLA - National Hardwood Lumber Association; www.nhla.com.
109. NLGA - National Lumber Grades Authority; www.nlga.org.
110. NOMMA - National Ornamental & Miscellaneous Metals Association;
www.nomma.org.
111. NRCA - National Roofing Contractors Association; www.nrca.net.
112. NRMCA - National Ready Mixed Concrete Association; www.nrmca.org.
113. NSF - NSF International; www.nsf.org.
114. NSPE - National Society of Professional Engineers; www.nspe.org.
115. NSSGA - National Stone, Sand & Gravel Association; www.nssga.org.
116. NWRA - National Waste & Recycling Association; www.wasterecycling.org.

117. PDI - Plumbing & Drainage Institute; www.pdionline.org.
118. PLASA - PLASA; www.plasa.org.
119. PLIB - Pacific Lumber Inspection Bureau; www.plib.org.
120. PVCPA - Uni-Bell PVC Pipe Association; www.uni-bell.org.
121. RCSC - Research Council on Structural Connections; www.boltcouncil.org.
122. RFCI - Resilient Floor Covering Institute; www.rfci.com.
123. RIS - Redwood Inspection Service; (see WWPA).
124. SAE - SAE International; www.sae.org.
125. SCTE - Society of Cable Telecommunications Engineers; www.scte.org.
126. SDI - Steel Deck Institute; www.sdi.org.
127. SDI - Steel Door Institute; www.steeldoor.org.
128. SEI/ASCE - Structural Engineering Institute/American Society of Civil Engineers; (see ASCE).
129. SIA - Security Industry Association; www.securityindustry.org.
130. SMA - Screen Manufacturers Association; www.smainfo.org.
131. SMACNA - Sheet Metal and Air Conditioning Contractors' National Association; www.smacna.org.
132. SPIB - Southern Pine Inspection Bureau; www.spib.org.
133. SPRI - Single Ply Roofing Industry; www.spri.org.
134. SRCC - Solar Rating & Certification Corporation; www.solar-rating.org.
135. SSINA - Specialty Steel Industry of North America; www.ssina.com.
136. SSPC - SSPC: The Society for Protective Coatings; (see AMPPE).
137. TCNA - Tile Council of North America, Inc.; www.tcnatile.com.
138. TEMA - Tubular Exchanger Manufacturers Association, Inc.; www.kbcdco.tema.org.
139. TIA - Telecommunications Industry Association; www.tiaonline.org.
140. TMS - The Masonry Society; www.masonrysociety.org.
141. ULSE - UL Standards & Engagement Inc.; www.ulse.org.
142. UL - UL Solutions Inc.; www.ul.com.
143. USGBC - U.S. Green Building Council; www.usgbc.org.
144. WA - Wallcoverings Association; www.wallcoverings.org.
145. WCLIB - West Coast Lumber Inspection Bureau; (see PLIB).
146. WCMA - Window Covering Manufacturers Association; www.wcmanet.org.
147. WDMA - Window & Door Manufacturers Association; www.wdma.com.
148. WI - Woodwork Institute; www.woodworkinstitute.com.
149. WSRCA - Western States Roofing Contractors Association; www.wsrca.com.
150. WWPA - Western Wood Products Association; www.wwpa.org.

B. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they are to mean the recognized name of the entities in the following list. This information is believed to be accurate as of the date of the Contract Documents.

1. IAPMO - International Association of Plumbing and Mechanical Officials; www.iapmo.org.
2. ICC - International Code Council; www.iccsafe.org.
3. ICC-ES - ICC Evaluation Service, LLC; www.icc-es.org.

C. Federal Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they are to mean the recognized name of the entities in the following list. Information is subject to change and is up to date as of

the date of the Contract Documents.

1. CPSC - U.S. Consumer Product Safety Commission; www.cpsc.gov.
2. EPA - United States Environmental Protection Agency; www.epa.gov.
3. LBNL - Lawrence Berkeley National Laboratory; Energy Technologies Area; www.lbl.gov/.
4. NIST - National Institute of Standards and Technology; www.nist.gov.
5. OSHA - Occupational Safety & Health Administration; www.osha.gov.
6. USPS - United States Postal Service; www.usps.com.

D. Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they are to mean the recognized name of the standards and regulations in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. CFR - Code of Federal Regulations; Available from U.S. Government Publishing Office; www.govinfo.gov.
2. FED-STD - Federal Standard; (see FS).
3. USAB - United States Access Board; www.access-board.gov.

E. State Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they are to mean the recognized name of the entities in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. CCR; California Code of Regulations; Office of Administrative Law; California Title 24 Energy Code; www.oal.ca.gov/publications/ccr/.
2. CDPH; California Department of Public Health; Indoor Air Quality Program; www.cdph.ca.gov/Programs/CCDPHP/DEODC/EHLB/IAQ/Pages/Main-Page.aspx.
3. CPUC; California Public Utilities Commission; www.cpuc.ca.gov.

PART 2 - PRODUCTS (Not Used)
PART 3 - EXECUTION (Not Used)

END OF SECTION 014200

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.

1.2 USE CHARGES

- A. Installation, removal, and use charges for temporary facilities to be included in the Contract Sum unless otherwise indicated. Allow other entities engaged in the Project to use temporary services and facilities without cost, including, but not limited to, Owner's construction forces, Architect, occupants of Project, testing agencies, and authorities having jurisdiction.
- B. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use with metering. Provide connections and extensions of services and metering as required for construction operations.
- C. Electric Power Service from Existing System: Electric power from Owner's existing system is available for use with metering. Provide connections and extensions of services and metering as required for construction operations.

1.3 INFORMATIONAL SUBMITTALS

- A. Site Utilization Plan: Show temporary facilities, temporary utility lines and connections, staging areas, construction site entrances, vehicle circulation, and parking areas for construction personnel.
- B. Implementation and Termination Schedule: Within 15 days of date established for commencement of the Work, submit schedule indicating implementation and termination dates of each temporary utility.
- C. Project Identification and Temporary Signs: Show fabrication and installation details, including plans, elevations, details, layouts, typestyles, graphic elements, and message content.
- D. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.
- E. Moisture- and Mold-Protection Plan: Describe procedures and controls for protecting materials and construction from water absorption and damage and mold. Describe delivery, handling, storage, installation, and protection provisions for materials subject to water absorption or water damage.

1. Indicate procedures for discarding water-damaged materials, protocols for mitigating water intrusion into completed Work, and requirements for replacing water-damaged Work.
2. Indicate sequencing of work that requires water, such as sprayed fire-resistive materials, plastering, and terrazzo grinding, and describe plans for dealing with water from these operations. Show procedures for verifying that wet construction has dried sufficiently to permit installation of finish materials.
3. Indicate methods to be used to avoid trapping water in finished work.

1.4 QUALITY ASSURANCE

- A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

1.5 PROJECT CONDITIONS

- A. Temporary Use of Permanent Facilities: Engage Installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Portable Chain-Link Fencing: Minimum **2-inch, 0.148-inch-** thick, galvanized-steel, chain-link fabric fencing; minimum **6 feet** high with galvanized-steel pipe posts; minimum **2-3/8-inch-** OD line posts and **2-7/8-inch-** OD corner and pull posts, with **1-5/8-inch-** OD top and bottom rails. Provide galvanized-steel bases for supporting posts.
- B. Polyethylene Sheet: Reinforced, fire-resistive sheet, **10-mil** minimum thickness, with flame-spread rating of 15 or less in accordance with ASTM E84 and passing NFPA 701 Test Method 2.
- C. Dust-Control Adhesive-Surface Walk-Off Mats: Provide mats, minimum **36 by 60 inches**.
- D. Insulation: Unfaced mineral-fiber blanket, manufactured from glass, slag wool, or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively.

2.2 TEMPORARY FACILITIES

- A. Field Offices:

1. Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.
- B. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.
 1. Store combustible materials apart from building.

2.3 EQUIPMENT

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. HVAC Equipment: Unless Owner authorizes use of permanent HVAC system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.

PART 3 - EXECUTION

3.1 TEMPORARY FACILITIES, GENERAL

- A. Conservation: Coordinate construction and use of temporary facilities with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.
 1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. See other Sections for disposition of salvaged materials that are designated as Owner's property.

3.2 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.3 TEMPORARY UTILITY INSTALLATION

- A. General: Install temporary service or connect to existing service.
 1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
- B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.

1. Connect temporary sewers to municipal system as directed by authorities having jurisdiction.
 - C. Water Service:
 1. Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
 - D. Sanitary Facilities: Provide temporary toilets, wash facilities, safety shower and eyewash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
 - E. Temporary Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.
 1. Provide temporary dehumidification systems when required to reduce ambient and substrate moisture levels to level required to allow installation or application of finishes and their proper curing or drying.
 - F. Electric Power Service:
 1. Connect to Owner's existing electric power service. Maintain equipment in a condition acceptable to Owner.
 2. Provide electric power service and distribution system of sufficient size, capacity, and power characteristics required for construction operations.
 - a. Install electric power service underground unless otherwise indicated.
 - b. Connect temporary service to Owner's existing power source, as directed by Owner.
 - G. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.
 1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.
- 3.4 SUPPORT FACILITIES INSTALLATION
- A. Comply with the following:
1. Utilize designated area within existing building for temporary field offices.
 2. Maintain support facilities until Architect schedules Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under

conditions acceptable to Owner.

- B. Traffic Controls: Comply with requirements of authorities having jurisdiction.
 - 1. Protect existing site improvements to remain, including curbs, pavement, and utilities.
 - 2. Maintain access for fire-fighting equipment and access to fire hydrants.
- C. Parking: Use designated areas of Owner's existing parking areas for construction personnel.
- D. Storage and Staging: Use designated areas of Project site for storage and staging needs.
- E. Dewatering Facilities and Drains: Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water.
 - 1. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties or endanger permanent Work or temporary facilities.
- F. Project Signs: Provide Project signs as indicated. Unauthorized signs are not permitted.
 - 1. Identification Signs: Provide Project identification signs as indicated on Drawings.
 - 2. Temporary Signs: Provide other signs as indicated and as required to inform public and individuals seeking entrance to Project.
 - a. Provide temporary, directional signs for construction personnel and visitors.
 - 3. Maintain and touch up signs, so they are legible at all times.
- G. Waste Disposal Facilities:
 - 1. Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction. Comply with progress cleaning requirements in Section 017300 "Execution."
- H. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.
 - 1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.

3.5 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.
 - 1. Where access to adjacent properties is required in order to affect protection of existing facilities, obtain written permission from adjacent property owner to

access property for that purpose.

- B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
- C. Stormwater Control: Comply with requirements of authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.
- D. Tree and Plant Protection:
 - 1. Comply with requirements specified in Section 015639 "Temporary Tree and Plant Protection."
 - 2. Install temporary fencing located as indicated or outside the drip line of trees to protect vegetation from damage from construction operations. Protect tree root systems from damage, flooding, and erosion.
- E. Pest Control: Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals, so Project will be free of pests and their residues at Substantial Completion. Perform control operations lawfully, using materials approved by authorities having jurisdiction.
- F. Site Enclosure Fence: Before construction operations begin, furnish and install site enclosure fence in a manner that will prevent people from easily entering site except by entrance gates.
 - 1. Extent of Fence: As indicated on Drawings.
 - 2. Maintain security by limiting number of keys and restricting distribution to authorized personnel. Furnish one set of keys to Owner.
- G. Security Enclosure and Lockup: Install temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security. Lock entrances at end of each workday.
- H. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.
- I. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.
 - 1. Where heating or cooling is needed and permanent enclosure is incomplete, insulate temporary enclosures.
- J. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses.

Comply with NFPA 241; manage fire-prevention program.

1. Prohibit smoking in construction areas. Comply with additional limits on smoking specified in other Sections.
2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition in accordance with requirements of authorities having jurisdiction.
3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
4. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign, stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

3.6 MOISTURE AND MOLD CONTROL

- A. Moisture and Mold Protection: Protect stored materials and installed Work in accordance with Moisture and Mold Protection Plan.
- B. Partially Enclosed Construction Period: After installation of weather barriers but before full enclosure and conditioning of building, when installed materials are still subject to infiltration of moisture and ambient mold spores, protect as follows:
 1. Do not load or install drywall or other porous materials or components, or items with high organic content, into partially enclosed building.
 2. Keep interior spaces reasonably clean and protected from water damage.
 3. Periodically collect and remove waste containing cellulose or other organic matter.
 4. Discard or replace water-damaged material.
 5. Do not install material that is wet.
 6. Discard and replace stored or installed material that begins to grow mold.
 7. Perform work in a sequence that allows wet materials adequate time to dry before enclosing the material in gypsum board or other interior finishes.
- C. Controlled Construction Period: After completing and sealing of the building enclosure but prior to the full operation of permanent HVAC systems, maintain as follows:
 1. Control moisture and humidity inside building by maintaining effective dry-in conditions.
 2. Use temporary or permanent HVAC system to control humidity within ranges specified for installed and stored materials.
 3. Comply with manufacturer's written instructions for temperature, relative humidity, and exposure to water limits.
 - a. Hygroscopic materials that may support mold growth, including wood and gypsum-based products, that become wet during the course of construction and remain wet for 48 hours are considered defective and require replacing.
 - b. Remove and replace materials that cannot be completely restored to their

manufactured moisture level within 48 hours.

3.7 OPERATION, TERMINATION, AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
- B. Maintenance: Maintain facilities in good operating condition until removal.
 - 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
- C. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.
- D. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
 - 1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.
 - 2. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 017700 "Closeout Procedures."

END OF SECTION 015000

SECTION 015136 - WATERING

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. The work of this section consists of furnishing, hauling, and applying water required for compaction of embankments, backfills, subgrade, and base course, and for landscaping, and other construction operation.

1.2 RELATED WORK

- A. Section 01 50 00 – Temporary Facilities and Controls
- B. Section 01 57 27 – Dust Control

1.3 REFERENCES

- A. State Standard Specifications Section 10-6, Watering

PART 2 - PRODUCTS

2.1 WATER

- A. Free of debris, organic matter, and other objectionable substances.

PART 3 - EXECUTION

3.1 WATER TRUCK

- A. At least 1,000-gallon capacity.
- B. Keep at least one water truck on site at all times, unless Engineer approves removal of the truck from the site before final completion.

3.2 APPLICATION

- A. Use pressure type distributors or a pipeline equipped with sprinkler system. Provide approved meter devices near points of discharge.
- B. Ensure a uniform application of water for optimum moisture content. Avoid excessive runoff and minimize water waste.
- C. The Contractor may water excavation areas before excavating. Drill full depth of excavation to make moisture determinations.
- D. If over watering occurs, de-water at no additional expense to the Owner.

3.3 SPECIAL CONTROLS

The Contractor shall take all reasonable means to minimize inconvenience and injury to the public by dust, noise, diversion of storm water, or other agencies under his control.

A. Dust Control

1. As specified in Section 01 57 27, Dust Control

B. Water

1. The Contractor shall pay for and shall construct all facilities necessary to furnish water for his use during construction. The Contractor shall pay for all water used for the Contractor's operations prior to final acceptance. The Contractor may make arrangements with the Owner to use non-potable well water or treated effluent where appropriate during construction.
2. Water used for human consumption shall be kept free from contamination and shall conform to the requirements of the State and local authorities for potable water.
3. Full compensation for furnishing all labor, materials, tools and equipment and for doing all work involved in furnishing and applying water as required by the Contract Documents and Specifications, State Standard Specifications, shall be considered as included in the contract unit prices paid for other items of work and no additional allowance will be made therefore.

END OF SECTION 015136

SECTION 015639 - TEMPORARY TREE AND PLANT PROTECTION

PART 1 - GENERAL

1.1 SUMMARY

- A. The Work of this Section Includes: General protection and pruning of existing trees and plants that are affected by execution of the Work, whether temporary or permanent construction.
- B. Related Requirements:
 - 1. Section 015000 "Temporary Facilities and Controls" for temporary controls, utilities, support facilities, temporary site fencing, and, if applicable, temporary erosion and sedimentation controls if not specified in Section 311000 "Site Clearing".

1.2 DEFINITIONS

- A. Caliper: Diameter of a trunk measured by a diameter tape at a height **6 inches** above the ground for trees up to and including **4-inch** size at this height and as measured at a height of **12 inches** above the ground for trees larger than **4-inch** size.
- B. Plant-Protection Zone: Area surrounding individual trees, groups of trees, shrubs, or other vegetation to be protected during construction and indicated on Drawings.
- C. Tree-Protection Zone: Area surrounding individual trees or groups of trees to be protected during construction and defined by a circle concentric with each tree with a radius 12 times the tree's caliper size and with a minimum radius of **96 inches** unless otherwise indicated.
- D. Vegetation: Trees, shrubs, groundcovers, grass, and other plants.

1.3 ACTION SUBMITTALS

- A. Product Data:
 - 1. General protection and pruning of existing trees and plants that are affected by execution of the Work, whether temporary or permanent construction
- B. Shop Drawings:
 - 1. Include plans, elevations, and sections showing trees and plants to be protected, locations of protection-zone fencing and signage, and the relationship between equipment-movement routes and material storage locations with protection zones.

2. Detail fabrication and assembly of protection-zone fencing and signage.
 3. Indicate extent of utility boring and trenching by hand or with air spade within protection zones.
 4. Include existing irrigation system that will be used to water plants.
- C. Tree-Pruning Schedule: Written schedule detailing scope and extent of pruning of trees to remain that interfere with or are affected by construction.
1. Species and size of tree.
 2. Location on site plan. Include unique identifier for each.
 3. Reason for pruning.
 4. Description of pruning to be performed.
 5. Description of maintenance following pruning.
- D. Maintenance Recommendations: From arborist, for care and protection of trees affected by construction during and after completing the Work.
- E. Mitigation Requirements: As required by jurisdiction or as developed by arborist, for mitigation of damage to trees and other plantings.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Statements: For tree service firm.
- B. Certification: From tree service firm, certifying that trees indicated to remain have been protected during construction in accordance with recognized standards and that trees were promptly and properly treated and repaired when damaged.
- C. Maintenance Recommendations: From tree service firm, for care and protection of trees affected by construction during and after completing the Work.
- D. Existing Conditions: Documentation of existing trees and plantings indicated to remain, which establishes preconstruction conditions that might be misconstrued as damage caused by construction activities.
1. Use sufficiently detailed photographs or video recordings.
 2. Include plans and notations to indicate specific wounds and damage conditions of each tree or other plants designated to remain.
- E. Quality-control program.

1.5 QUALITY ASSURANCE

- A. Tree-Service Firm Qualifications: An experienced tree-service firm that has successfully completed temporary tree- and plant-protection work similar to that required for this Project and that will assign an experienced, qualified arborist to Project site during execution of the Work.
- B. Quality-Control Program: Prepare a written program to systematically demonstrate the

ability of personnel to properly follow procedures and handle materials and equipment during the Work without damaging trees and plantings. Include dimensioned diagrams for placement of protection-zone fencing and signage, the arborist's and tree-service firm's responsibilities, instructions given to workers on the use and care of protection zones, and enforcement of requirements for protection zones.

1.6 FIELD CONDITIONS

- A. The following practices are prohibited within protection zones:
 - 1. Storage of construction materials, debris, or excavated material.
 - 2. Moving or parking vehicles or equipment.
 - 3. Foot traffic.
 - 4. Erection of sheds or structures.
 - 5. Impoundment of water.
 - 6. Excavation or other digging unless otherwise indicated.
 - 7. Attachment of signs to or wrapping materials around trees or plants unless otherwise indicated.
- B. Do not direct vehicle or equipment exhaust toward protection zones.
- C. Prohibit heat sources, flames, ignition sources, and smoking within or near protection zones and organic mulch.
- D. Take precautions to protect plants from airborne contaminants, such as paint or fireproofing overspray.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Backfill Soil: Stockpiled soil from location indicated on Drawings of suitable moisture content and granular texture for placing around tree; free of stones, roots, plants, sod, clods, clay lumps, pockets of coarse sand, concrete slurry, concrete layers or chunks, cement, plaster, building debris, and other extraneous materials harmful to plant growth.
- B. Protection-Zone Fencing: Fencing fixed in position and meeting the following requirements: Previously used materials may be used when approved by Architect.
 - 1. Plastic Protection-Zone Fencing: Plastic construction fencing constructed of high-density extruded and stretched polyethylene fabric with **2-inch** maximum opening in pattern and weighing a minimum of **0.4 lb/ft.**; remaining flexible from **minus 60 to plus 200 deg F**; inert to most chemicals and acids; minimum tensile yield strength of **2000 psi** and ultimate tensile strength of **2680 psi**; secured with plastic bands or galvanized-steel or stainless steel wire ties; and supported by tubular or T-shape galvanized-steel posts spaced not more than **96 inches** apart.

- a. Height: 48 inches.
- b. Color: High-visibility orange, nonfading.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Erosion and Sedimentation Control: Examine the site to verify that temporary erosion- and sedimentation-control measures are in place. Verify that flows of water redirected from construction areas or generated by construction activity do not enter or cross protection zones.

3.2 PREPARATION

- A. Locate and clearly identify trees, shrubs, and other vegetation to remain or to be relocated. Flag each tree trunk at 54 inches above the ground.
- B. Protect tree root systems from damage caused by runoff or spillage of noxious materials while mixing, placing, or storing construction materials. Protect root systems from ponding, eroding, or excessive wetting caused by dewatering operations.

3.3 TREE PROTECTION 3.4 PROTECTION ZONES

- A. Protection-Zone Fencing: Install protection-zone fencing along edges of protection zones in a manner that will prevent people from easily entering protected areas except by entrance gates. Construct fencing so as not to obstruct safe passage or visibility at vehicle intersections where fencing is located adjacent to pedestrian walkways or in close proximity to street intersections, drives, or other vehicular circulation.
 - 1. Posts: Set or drive posts into ground one-third the total height of the fence without concrete footings. Where a post is located on existing paving or concrete to remain, provide appropriate means of post support acceptable to Architect.
 - 2. Plastic Fencing: Stretch fabric taut and secure to posts without bows or sags.
- B. Maintain protection zones free of weeds and trash.
- C. Maintain hydration of plants to assure plant survival.
- D. Maintain protection-zone fencing and signage in good condition as acceptable to Architect and remove when construction operations are complete and equipment has been removed from the site.
 - 1. Do not remove protection-zone fencing, even temporarily, to allow deliveries or equipment access through the protection zone.
 - 2. Temporary access is permitted subject to preapproval in writing by arborist if a root buffer effective against soil compaction is constructed as directed by

arborist. Maintain root buffer so long as access is permitted.

3.5 EXCAVATION

- A. General: Excavate at edge of protection zones and for trenches indicated within protection zones in accordance with requirements in Section 312000 "Earth Moving" unless otherwise indicated.
- B. Trenching within Protection Zones: Where utility trenches are required within protection zones, excavate under or around tree roots by hand or with air spade, or tunnel under the roots by drilling, auger boring, or pipe jacking. Do not cut main lateral tree roots or taproots; cut only smaller roots that interfere with installation of utilities. Cut roots as required for root pruning. If excavating by hand, use narrow-tine spading forks to comb soil and expose roots.

3.6 ROOT PRUNING

- A. Prune tree roots that are affected by temporary and permanent construction. Prune roots as follows:
 - 1. Cut roots manually by digging a trench and cutting exposed roots with sharp pruning instruments; do not break, tear, chop, or slant the cuts. Do not use a backhoe or other equipment that rips, tears, or pulls roots.
 - 2. Cut Ends: Do not paint cut root ends.
 - 3. Temporarily support and protect roots from damage until they are permanently covered with soil.
 - 4. Cover exposed roots with burlap and water regularly.
 - 5. Backfill as soon as possible in accordance with requirements in Section 312000 "Earth Moving."
- B. Root Pruning at Edge of Protection Zone: Prune tree roots flush with the edge of the protection zone by cleanly cutting all roots to the depth of the required excavation.
- C. Root Pruning within Protection Zone: Clear and excavate by hand or with air spade to the depth of the required excavation to minimize damage to tree root systems. If excavating by hand, use narrow-tine spading forks to comb soil to expose roots. Cleanly cut roots as close to excavation as possible.

3.7 CROWN PRUNING

- A. Prune branches that are affected by temporary and permanent construction. Prune branches .
 - 1. Prune to remove only broken, dying, or dead branches unless otherwise indicated. Do not prune for shape unless otherwise indicated.
 - 2. Do not remove or reduce living branches to compensate for root loss caused by damaging or cutting root system.

- B. Unless otherwise directed by tree service firm and acceptable to Architect, do not cut tree leaders.
- C. Cut branches with sharp pruning instruments; do not break or chop.
- D. Do not paint or apply sealants to wounds.
- E. Chip removed branches and spread over areas identified by Architect.

3.8 REGRADING

- A. Lowering Grade: Where new finish grade is indicated below existing grade around trees, slope grade beyond the protection zone. Maintain existing grades within the protection zone.
- B. Raising Grade: Where new finish grade is indicated above existing grade around trees, slope grade beyond the protection zone. Maintain existing grades within the protection zone.
- C. Minor Fill within Protection Zone: Where existing grade is 2 inches or less below elevation of finish grade, fill with backfill soil. Place backfill soil in a single uncompacted layer and hand grade to required finish elevations.

3.9 REPAIR AND REPLACEMENT

- A. General: Repair or replace trees, shrubs, and other vegetation indicated to remain or to be relocated that are damaged by construction operations, in a manner approved by Architect.
 - 1. Submit details of proposed pruning and repairs.
 - 2. Perform repairs of damaged trunks, branches, and roots within 24 hours.
 - 3. Replace trees and other plants that cannot be repaired and restored to full-growth status, as determined by Architect.
- B. Trees: Remove and replace trees indicated to remain that are more than 66 percent dead or in an unhealthy condition or are damaged during construction operations that Architect determines are incapable of restoring to normal growth pattern.
 - 1. Small Trees: Provide new trees of same size and species as those being replaced for each tree that measures 4 inches or smaller in caliper size.
 - 2. Large Trees: Provide one new tree(s) of 6-inch caliper size for each tree being replaced that measures more than 4 inches in caliper size.
 - a. Species: As selected by Architect.

END OF SECTION 015639

SECTION 015723 - STORM WATER POLLUTION PREVENTION PLAN

PART 1 - GENERAL

1.1 WORK INCLUDES

- A. The Contractor shall apply for and obtain coverage under State of California Construction General Permit Order 2022-0057-DWQ, as applicable, at least three weeks before starting Work and shall implement storm water pollution prevention measures as prescribed in the Legally Responsible Person (LRP) approved Storm Water Pollution Prevention Plan (SWPPP) to prevent sediment and/or pollutants from entering storm drains, streams, or water bodies throughout the duration of the Work in compliance with the permit requirements, including CalGreen Building Standards. Work shall be performed in accordance with all Federal, State, and local regulations. It is assumed that the project's total disturbed surface area is greater than 1 acre.
- B. The Contractor shall furnish and exercise every reasonable precaution to protect channels, storm drains, and bodies of water from pollution and provide all labor, materials, tools, and equipment necessary to prevent storm water pollution associated with construction activities, including preparation of information for the owner's Qualified SWPPP Developer (QSD) to revise and develop an approved SWPPP and amendments if necessary for Construction General Permit (CGP) Compliance, installation, maintenance and final removal of all temporary and permanent erosion and sediment control measures, in accordance with the requirements of the Contract Documents.
 - 1. The Legally Responsible Person (LRP) is County of Fresno.
 - 2. The Approved Signatory for the LRP is Mr. Barry Mast.
- C. Penalties: Failure to comply with this Section may result in significant fines and possible imprisonment. The Regional Water Quality Control Board (RWQCB) or other prosecuting authority may assess fines for each violation. Should the District be fined or penalized as a result of the Contractor failing to comply with this Section and applicable permit requirements, the Contractor shall reimburse the District for any and all fines, penalties and related costs.
- D. All costs for work required for compliance with this Section shall be included in the price bid for SWPPP Preparation and Monitoring.

1.2 REFERENCES

- A. California State Water Resources Control Board, Construction General Permit 2022-0057-DWQ, https://www.waterboards.ca.gov/board_decisions/adopted_orders/water_quality/2022/wqo_2022-0057-dwq.pdf
- B. California Stormwater Quality Association (CASQA), <https://www.casqa.org/>

- C. For Bidding Purposes only, Draft Stormwater Pollution Prevention Plan, dated October 24, 2024 in Appendix.

1.3 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures.
- B. Submittals under this section shall be completed and submitted at least three weeks prior to beginning work and within 2 days of issuance of the Notice to Proceed.
 - 1. The contractor shall submit to the owner's QSD information regarding revision of the Draft SWPPP in order to complete the SWPPP for submittal to Stormwater Multiple Application and Report Tracking System (SMARTS). The appropriate project information for the revised SWPPP, Post-Construction Calculations, Dewatering Plan(s), additional Permit Registration Documents, Annual Reports, Sampling and Analysis reports, and all other permit compliance documents to be submitted to the State Water Board via the SMARTS system. All documents shall be kept onsite in either a job trailer or accessible lockbox.
- C. Certifications
 - 1. As applicable to the appropriate permit requirements:
 - a. Copy of the Certificate of Training issued by CASQA demonstrating qualification of the designated QSD or California Board for Professional Engineers, Land Surveyors, and Geologists (CBPELSG) Licensed QSD Training Program proof of good standing.
 - b. Copy of the Certificate of Training issued by CASQA demonstrating qualification of the designated Qualified SWPPP Practitioner (QSP)(s) or CBPELSG Licensed QSD Training Program proof of good standing.
 - c. Copy of the Certificate of Training issued by the Project QSP demonstrating qualification of the designated QSP Delegate(s) Foundational and Site-Specific Training.
- D. Proof of project sign with SWPPP Waste Discharge Identification (WDID) number and the location to be displayed.
- E. Proof of installation of rain gauge on project site.
- F. Submit all required inspection reports including project photographs (weekly, quarterly, precipitation event (pre, during and post), quarterly, and sampling results) to QSD & LRP within 24 hours of inspection.
- G. Project Post-Construction Long-Term Maintenance Plan
- H. Project Post-Construction Stabilization Plan

1.4 QUALITY ASSURANCE

At minimum, the following measures shall be taken to help ensure control of storm water and non-storm water pollution. These measures shall not be construed to limit or override the measures set forth and called for in the SWPPP.

- A. Develop, submit to the QSD, and obtain approval from the RWQCB for site dewatering. Control the rate and effect of dewatering in such a manner as to avoid all objectionable settlement and subsidence and to assure the integrity of the finished work.
- B. Where critical structures or facilities exist immediately adjacent to areas of proposed dewatering, establish reference points and observe at frequent intervals to detect any settlement that may develop. Conduct the dewatering operation in a manner that protects adjacent natural resources and facilities. Cost of repairing all damage to adjacent resources and facilities shall be the sole responsibility of the Contractor.
- C. Before commencing grading, excavation or filling in any part of the site, Contractor shall construct swales, diversion channels, inlet protection barriers, sedimentation traps, and other measures to guide runoff away from the work area and to capture eroded material before it reaches natural water courses. The measures shall be in accordance with the approved storm water pollution prevention plans.
- D. Arrange demolition activities to minimize erosion to the maximum practical extent. Clearing, excavation, and grading shall be limited to those areas of the Project site necessary for demolition. Minimize the area exposed and unprotected.
- E. Clearly mark and delineate the work limits activities. Equipment shall not be allowed to operate outside the limits of work or to disturb existing vegetation. Excavation and grading shall be completed during the dry season to the maximum extent possible.

1.5 GENERAL REQUIREMENTS

- A. The Contractor shall exercise care in preserving vegetation and protecting property, to avoid disturbing areas beyond the limits of the Work and promptly repair any damage caused by Contractor operations.
- B. The Contractor shall provide all necessary water pollution control devices to prevent, control, and abate water pollution, and implement good housekeeping pollution control measures to reduce the discharge of pollutants from the Site to the maximum extent practicable. These water pollution control devices include structural Best Management Practices (BMP)s, drains, gutters, slope protection blankets and retention basins and shall be constructed concurrently with other Work at the earliest practicable time.
- C. Stockpiles of earth and other construction-related materials shall be protected from being transported from the Site by wind or water using covers or equivalent.
- D. The Contractor shall properly store and handle fuels, oils, solvents, and other toxic materials in a manner not to contaminate the soil or surface waters, enter the

groundwater, or be placed where they may enter a live stream, channel, drain, or other water conveyance facilities. All approved toxic storage containers shall be protected from weather. Spills shall be cleaned immediately, and soiled materials shall be properly disposed of. Spills shall not be washed into live streams, channels, drains, storm drains, or other water conveyance facilities.

- E. Excess or waste concrete (including concrete decant water) shall not be washed onto bare ground, into the public way or any drainage systems. The concrete wastes shall be retained on-site until they can be appropriately disposed of or recycled. Concrete wastes shall not be washed into live streams, channels, drains, storm drains, other water conveyance facilities, bare ground or unapproved concrete washout containment areas.
- F. Non-stormwater runoff from equipment washing, vehicle washing, and any other activities shall be contained at the work site and properly disposed of. Non-stormwater runoff shall not be allowed to enter live streams, channels, drains, storm drains, or other water conveyance facilities.
- G. The Contractor shall prevent sediments and other materials to be tracked from the Site by vehicle traffic. Construction entrance roadways shall be stabilized to inhibit sediments from being deposited onto public ways. The Contractor shall immediately sweep up accidental depositions and not allow depositions to be washed away by rain or by any other means.

1.6 REGULATORY REQUIREMENTS

- A. The Contractor shall comply with the requirements of the State Water Resources Control Board (SWRCB), RWQCB, California Administrative Code, California Building Code, Owner and any other agencies having jurisdiction in storm water and non-storm water discharges and waste management.
- B. General Permit Registration Documents:
 - 1. The Contractor shall employ or contract with qualified personnel to prepare all compliance documents in accordance with the applicable regulatory requirements.
 - 2. All engineering calculations, reports, and drawings shall be prepared, and signed by a California licensed engineer in accordance with California Business and Professional Code Section 6700, et seq.
 - 3. The LRP's qualified personnel shall file the required documents, as necessary, through the SWRCB's Storm Water Multiple Application and Report Tracking System (SMARTS) website.
 - 4. The Contractor shall mail the appropriate application fee to the SWRCB no later than two (2) days after notification of submittal to the SWRCB via SMARTS. The Contractor shall affix the SWRCB Fee Statement Letter to the application fee. The Contractor shall pay all amendment and/or annual fees for subsequent years as required by the CGP.

5. The Contractor shall not commence any construction work until a Waste Discharger Identification (WDID) number assigned by the SWRCB is received. The Contractor shall retain a copy of the WDID onsite, as evidence of the SWRCB acceptance of the PRDs and SWPPP.
- C. The Contractor shall comply with the discharge and effluent prohibitions and limitations listing in the 2022 CGP.

1.7 STORM WATER POLLUTION PREVENTION PLAN IMPLEMENTATION

A. General Requirements:

1. Implementation of all BMPs shall be overseen by trained personnel employed or retained by the Contractor.
2. All required site monitoring and water testing, as necessary, shall be overseen by a QSP employed or retained by the Contractor.
3. All erosion and sediment control measures shall be implemented as specified in the SWPPP.
4. A copy of the SWPPP, including working details (fact sheets) for construction site BMPs and applicable amendments, shall be kept and maintained by the Contractor on the construction site and continuously updated in accordance with CGP requirements to reflect current site conditions throughout the duration of the project.
5. Copies of the project inspection reports, annual report, weather forecasts, rain gauge log(s), sampling and analysis reports, and all other pertinent information should be kept onsite or maintained electronically and made available upon request.

- B. The Contractor shall implement all activities required by the CGP for the Type and/or Risk Level of the project as detailed in the SWPPP in accordance with the CGP. The SWPPP shall identify applicable best management practices (BMPs). All stormwater or non-stormwater pollution prevention activities specified in the SWPPP shall comply with the guidance provided in the "Stormwater Best Management Practice Handbook, Construction," August 2023 or more current edition, published by the California Stormwater Quality Association (CASQA).

1. The SWPPP shall detail the placement of physical BMPs required for installation and the methods used to comply with those BMPs. The Contractor's preferred techniques shall show how it will comply with the stated objectives of the SWPPP and the terms of the CGP.

- C. Non-Stormwater Management: As specified in the CGP as appropriate to the project Risk Level, the SWPPP shall discuss any non-stormwater sources (i.e., landscaping, irrigation, pipe flushing, street washing and dewatering). In addition, the SWPPP shall include standard observation measures and BMPs, Best Available Technology/Best Control Technology (BAT/BCT) practices that are to be implemented in order to reduce the pollutant loading in the discharge waters.

- D. Amendments: All SWPPP amendments shall be prepared by the QSD at no additional cost to the Owner.
1. The Contractor shall, at no additional cost to the Owner, amend the SWPPP whenever there is a change in construction or operations which may affect the discharge of pollutants to stormwater. All fees as determined by the SWRCB will be paid by the Contractor.
 2. The Contractor shall, at no additional cost to the Owner, amend the SWPPP if it is in violation of any conditions of the CGP or has not achieved the general objective of reducing pollutants in stormwater discharges. All fees as determined by the SWRCB will be paid by the Contractor.
- E. Annual Reporting: The Contractor shall submit to the LRP an annual report and all required information for SMARTS data entry, no later than July 15th of each year. The LRP shall submit to the SWRCB via the SMARTS system in accordance with the requirements the CGP, including but not limited to: all inspection reports from the QSD and QSP/QSP delegate, training records/certifications from the QSD, QSP, and QSP delegate, a summary and evaluation of all sampling and analysis results, original laboratory reports, chain of custody forms, a summary of all corrective actions taken during the compliance year and identification of any compliance activities or corrective actions that were not implemented. The LRP will certify the annual report by September 1st. A project of 90 days or more duration can require more than one Annual Report. See below.
1. An Annual Report is required while the Project is still under construction, if construction begins not later than June 1 of a calendar year and is not completed by September 1 of that same year.
 2. An Annual Report is required, without exception, within 90 days of or prior to the September 1 following project completion.
- Example: A project commencing on May 31 and completed on September 2 of the same year would require an annual report both by September 1 of the reporting year, and prior Notice of Termination submittal.
- F. Notice of Termination: Once construction is completed and the Site has been stabilized with final, sustainable cover, the QSP shall prepare a Notice of Termination (NOT), including a final site map, photos, project post-construction long term maintenance plan, final QSP post-construction inspection, and a final project Annual Report, shall obtain necessary signatures from the LRP and shall submit all through the State Water Board's SMARTS website within 80 days after all land disturbing activities end and construction is complete. The LRP will certify the Notice of Termination within 90 days of all land disturbing activities end and construction is complete via SMARTS in accordance with the CGP.

A Notice of Termination is distinct from an Annual Report. Both are required.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Materials furnished for BMPs shall meet the requirements of the California Stormwater Quality Association, Stormwater Best Management Practice Handbook, Construction – August 2023 edition (or most current version) unless otherwise indicated.
- B. Before the work begins, sufficient equipment shall be available on the site to assure that the operation and adequacy of the erosion control plans can be continuously maintained.
- C. If Fiber Rolls are to be used, sterile, hemp/burlap covered rolls are allowed. Plastic Mesh encased Fiber Rolls are not allowed.

PART 3 - EXECUTION

3.1 GENERAL DESCRIPTION

- A. The Contractor shall install and maintain all pollution, erosion, and sediment control measures and carry out inspections in accordance the approved SWPPP.
- B. Sediment transport and erosion from working stockpiles shall be controlled and restricted from moving beyond the immediately stockpile area by implementing applicable BMPs, including but not limited to construction of temporary toe-of-slope ditches and accompanying silt fences as necessary. If the BMPs proposed in the SWPPP prove inadequate to control sediment transport and erosion on the Site, the Contractor shall without delay implement additional provisions to obtain effective control. The SWPPP shall be updated to reflect the necessary changes as discussed in paragraph 1.7 above.
- C. The Contractor shall be responsible for taking the proper actions to prevent contaminants and sediments from leaving the project Site. The Contractor shall take immediate action if directed by the Construction Manager/LRP, or if the Contractor observes contaminants and/or sediments entering the storm drainage system, to prevent further stormwater from entering the system.

3.2 NOTIFICATION AND REPORTING

- A. If non-stormwater pollution occurs in the work area for any reason or when the Contractor becomes aware of any violation of this Section, the Contractor shall correct the problem and shall follow the requirements of the SWPPP for monitoring, control and reporting of non-stormwater discharges.

3.3 FIELD QUALITY CONTROL

- A. The Contractor shall maintain the BMPs and other protective measures in good and effective operating condition by performing routine inspections to determine condition and effectiveness, by restoration of destroyed vegetative cover, and by

repair of erosion and sediment control measures and other protective measures.

Should the QSP note any deficiencies in necessary BMPs during the course of QSP's inspections and reporting, Contractor shall immediately repair or replace the defective BMPs as required by the QSP.

3.4 INSPECTIONS

- A. The Contractor's QSP shall inspect disturbed areas of the construction site, areas that have not been finally stabilized, areas used for storage of materials exposed to precipitation, stabilization practices, structural practices, other controls, and area where vehicles are stored and/or exit the Site at least weekly, and in accordance with CGP precipitation event inspection requirements. The QSP shall perform quarterly inspections per CGP requirements.
- B. The Contractor's QSP shall inspect discharge locations or points to ascertain whether BMPs are effective in preventing significant impacts to receiving waters. Inspect locations where vehicles exit the Site for evidence of offsite sediment tracking.
- C. If required by the Project's Risk Level, Contractor's QSP shall conduct necessary Precipitation Event Monitoring, Sampling, and Reporting as required under the CGP.
- D. Inspection Reports shall be in compliance with the requirements of the CGP for the specified Risk Level/Linear Underground Project (LUP) Type. Furnish the report to the Construction Manager, QSD, Engineer, and LRP within 24 hours of the inspection as a part of the Contractor's daily report or as a standalone report.
- E. The Contractor's trained personnel shall be responsible for site discharge sampling and reporting as required under the CGP. Sample analysis reporting shall be submitted to the LRP and QSD within 24 hours of receipt from the field sampler and/or the laboratory along with sampling locations (latitude/longitude) and other requirements listed in the SWPPP.
- F. A copy of the QSP's inspection report shall be maintained on Site.

3.5 RECORDS

- A. The Contractor shall retain records/copies of data used to complete the PRDs; the SWPPP and all attachments and amendments; compliance certifications; notifications of non-compliance; training; incidents such as spills or other releases, including photographs as available; sampling and analysis of discharges discovered through visual monitoring; all reports required by the CGP; BMP inspections and checklists, and maintenance and repair activities; and activity-based BMPs, such as good housekeeping, that have been implemented.
- B. After the work is complete and accepted by the Owner, submit to the Engineer and Owner all records/copies of documents required by the CGP, including, but not

limited to, the records/copies of the documents noted above, and all documents uploaded to the SMARTS system.

3.6 MAINTENANCE OF TEMPORARY FACILITIES

- A. Inspect erosion and sediment control structures daily, including site exit locations, and as specified in the SWPPP.
- B. Sediment shall be removed from behind run off control structures after each storm, or as directed by the Engineer, LRP, QSD or QSP.
- C. If areas are seeded, Contractor shall examine those areas during and after major storms to check that grass is becoming established.

3.7 DISPOSAL OF SEDIMENT FROM STORM WATER POLLUTION CONTROL STRUCTURES

- A. Sediment excavated from temporary sediment control structures shall be disposed on the site with general fill or with topsoil. Sediment shall be allowed to dry out as required before reuse. All trash shall be removed before reuse.
- B. Contractor shall place the sediment removed from traps and other structures where it will not enter a storm drain or water course and where it will not immediately reenter the basin.

3.8 REMOVAL OF TEMPORARY STORM WATER POLLUTION CONTROL MEASURES

- A. In accordance with SWPPP requirements, temporary control measures shall be removed once all drainage area ground disturbance is completed, permanent drainage works have been constructed and full stabilization is achieved. The contractor shall not breach any temporary control structures until the associated catchment area is complete unless approved by the Engineer.

END OF SECTION 015723

SECTION 015727 - DUST CONTROL

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. The work of this section consists of implementing measures to prevent air pollution during construction activities, in accordance with Federal, State, and local regulations. It is assumed that the Project will have a total disturbed area less than 5 acres.

1.2 RELATED WORK

- A. Section 01 50 00 – Temporary Facilities and Controls
- B. Section 01 51 36 - Watering
- C. Division 2 – Existing Conditions
- D. Division 31 – Earthwork

1.3 REFERENCES

- A. San Joaquin Air Pollution Control District (SJVAPCD) Regulation VIII.

1.4 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures.
- B. Submittals under this section shall be completed and submitted at least 48 hours prior to beginning work.
- C. Proof of submittal of San Joaquin Air Pollution Control District (SJVAPCD) Construction Notification Form.

1.5 QUALITY ASSURANCE

- A. Control the rate and effect of watering in such a manner as to avoid all objectionable settlement and subsidence as approved by the Engineer and to assure the integrity of the finished work.
- B. Clearly mark and delineate the work limits activities.

1.6 REGULATORY REQUIREMENTS

- A. Contractor shall comply with all provisions of the SJVAPCD regulations, as well as Federal and State regulations.

PART 2 - PRODUCTS

2.1 EQUIPMENT

- A. Before the work begins, sufficient equipment and resources shall be available on the site to assure that the operation and adequacy of the dust control measures can be continuously maintained.

2.2 DUST CONTROL MEASURES

- A. Water shall be available to the contractor for dust control as specified in section 01 50 00 – Temporary Facilities.

PART 3 EXECUTION

3.1 GENERAL DESCRIPTION

- A. Dust control measures shall include, but may not be limited to: Water application, physical barriers limiting site access, reduction of vehicle speed on site, utilization of gravel pads, and utilization of grizzlies. If physical barriers are utilized, the Engineer shall approve the location, size, and type. Physical barriers shall be removed upon project completion.
- B. Furnish, install, maintain, and operate necessary control measures and other equipment necessary to prevent dust. Temporary measures shall be to Contractor's own design and Contractor shall be solely responsible for risks related to the management of dust control during construction.

3.2 DUST CONTROL

- A. The Contractor shall take whatever steps, procedures, or means as are required to limit dust generated by his operations during the Work, including Saturdays, Sundays, and Holidays. Dust shall be controlled to the standards of the local governing agency or, in the absence of local standards, to the satisfaction of the Engineer. Dust control shall extend to any unpaved road which the Contractor or any of his subcontractors are using, to excavation or fill areas, to demolition operations, and to other activities. Control shall be by sprinkling, use of dust palliatives, modification of operations, or any other means acceptable to the local governing agency or, in the absence of same, the Engineer.
- B. If the dust control is not adequate in the opinion of the Engineer, this work may be done by others, and the cost shall be deducted from the total payment due the Contractor.

END OF SECTION 015727

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. The Work of This Section Includes: Administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.
- B. Related Requirements:
 - 1. Section 012500 "Substitution Procedures" for requests for substitutions.
 - 2. Section 014200 "References" for applicable industry standards for products specified.
 - 3. Section 017700 "Closeout Procedures" for submitting warranties.

1.2 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. New Products: Items that have not previously been incorporated into another project or facility. Salvaged items or items reused from other projects are not considered new products. Items that are manufactured or fabricated to include recycled content materials are considered new products unless otherwise indicated.
 - 3. Comparable Product: Product by named manufacturer that is demonstrated and approved through the comparable product submittal process described in "Comparable Products" Article, to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a single manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation. Published attributes and characteristics of basis-of-design product establish salient characteristics of products.
 - 1. Evaluating Comparable Products: In addition to the basis-of-design product description, product attributes and characteristics may be listed to establish the significant qualities related to type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other special

features and requirements for purposes of evaluating comparable products of additional manufacturers named in the specification. Manufacturer's published attributes and characteristics of basis-of-design product also establish salient characteristics of products for purposes of evaluating comparable products.

- C. Subject to Compliance with Requirements: Where the phrase "Subject to compliance with requirements" introduces a product selection procedure in an individual Specification Section, provide products qualified under the specified product procedure. In the event that a named product or product by a named manufacturer does not meet the other requirements of the specifications, select another named product or product from another named manufacturer that does meet the requirements of the specifications; submit a comparable product request or substitution request, if applicable.
- D. Comparable Product Request Submittal: An action submittal requesting consideration of a comparable product, including the following information:
 - 1. Identification of basis-of-design product or fabrication or installation method to be replaced, including Specification Section number and title and Drawing numbers and titles.
 - 2. Data indicating compliance with the requirements specified in "Comparable Products" Article.
- E. Basis-of-Design Product Specification Submittal: An action submittal complying with requirements in Section 013300 "Submittal Procedures."
- F. Substitution: Refer to Section 012500 "Substitution Procedures" for definition and limitations on substitutions.

1.3 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.
- B. Identification of Products: Except for required labels and operating data, do not attach or imprint manufacturer or product names or trademarks on exposed surfaces of products or equipment that will be exposed to view in occupied spaces or on the exterior.
 - 1. Labels: Locate required product labels and stamps on a concealed surface, or, where required for observation following installation, on a visually accessible surface that is inconspicuous.
 - 2. Equipment Nameplates: Provide a permanent nameplate on each item of service- or power-operated equipment. Locate on a visually accessible but inconspicuous surface. Include information essential for operation, including the following:
 - a. Name of product and manufacturer.
 - b. Model and serial number.

- c. Capacity.
 - d. Speed.
 - e. Ratings.
3. See individual identification Sections in Divisions 22, 23, and 26 for additional equipment identification requirements.

1.4 COORDINATION

- A. Modify or adjust affected work as necessary to integrate work of approved comparable products and approved substitutions.

1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products, using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.
- B. Delivery and Handling:
- 1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
 - 2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
 - 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
 - 4. Inspect products on delivery to determine compliance with the Contract Documents and that products are undamaged and properly protected.
- C. Storage:
- 1. Provide a secure location and enclosure at Project site for storage of materials and equipment.
 - 2. Store products to allow for inspection and measurement of quantity or counting of units.
 - 3. Store materials in a manner that will not endanger Project structure.
 - 4. Store products that are subject to damage by the elements under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation and with adequate protection from wind.
 - 5. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
 - 6. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
 - 7. Protect stored products from damage and liquids from freezing.

1.6 PRODUCT WARRANTIES

- A. Warranties specified in other Sections are to be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
 - 1. Manufacturer's Warranty: Written standard warranty form furnished by individual manufacturer for a particular product and issued in the name of Owner or endorsed by manufacturer to Owner.
 - 2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner and issued in the name of Owner or endorsed by manufacturer to Owner.
- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.
 - 1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
 - 2. Specified Form: When specified forms are included in the Project Manual, prepare a written document, using indicated form properly executed.
 - 3. See other Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Section 017700 "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
 - 1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
 - 2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
 - 3. Owner reserves the right to limit selection to products with warranties meeting requirements of the Contract Documents.
 - 4. Where products are accompanied by the term "as selected," Architect will make selection.
 - 5. Descriptive, performance, and reference standard requirements in Specifications establish salient characteristics of products.
- B. Product Selection Procedures:
 - 1. Non-Limited List of Products: Where Specifications include a list of names of

both available manufacturers and products, provide one of the products listed or an unnamed product that complies with requirements.

- a. Non-limited list of products is indicated by the phrase "Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to, the following."
 - b. Provision of an unnamed product is not considered a substitution, if the product complies with requirements.
 2. Non-Limited List of Manufacturers: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed or a product by an unnamed manufacturer that complies with requirements.
 - a. Non-limited list of manufacturers is indicated by the phrase "Subject to compliance with requirements, available manufacturers whose products may be incorporated in the Work include, but are not limited to, the following."
 - b. Provision of products of an unnamed manufacturer is not considered a substitution, if the product complies with requirements.
 3. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications may additionally indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.
 - a. For approval of products by unnamed manufacturers, comply with requirements in Section 012500 "Substitution Procedures" for substitutions for convenience.
- C. Visual Matching Specification: Where Specifications require the phrase "match Architect's sample," provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.
1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Section 012500 "Substitution Procedures" for proposal of product.
- D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or a similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.
- E. Sustainable Product Selection: Where Specifications require product to meet sustainable product characteristics, select products complying with indicated requirements. Comply with requirements in Division 01 sustainability requirements Section and individual Specification Sections.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration of Comparable Products: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with the following requirements:
1. Evidence that proposed product does not require revisions to the Contract Documents, is consistent with the Contract Documents, will produce the indicated results, and is compatible with other portions of the Work.
 2. Detailed comparison of significant qualities of proposed product with those of the named basis-of-design product. Significant product qualities include attributes such as type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other specific features and requirements.
 3. Evidence that proposed product provides specified warranty.
 4. List of similar installations for completed projects, with project names and addresses and names and addresses of architects and owners, if requested.
 5. Samples, if requested.
- B. Architect's Action on Comparable Products Submittal: If necessary, Architect will request additional information or documentation for evaluation within seven days of receipt of a request for a comparable product. Architect will notify Contractor through Construction Manager of approval or rejection of proposed comparable product within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
1. Architect's Approval of Submittal: Marked with approval notation from Architect's and Construction Manager's action stamp. See Section 013300 "Submittal Procedures."
- C. Submittal Requirements, Two-Step Process: Approval by Architect of Contractor's request for use of comparable product is not intended to satisfy other submittal requirements. Comply with specified submittal requirements.

PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

SECTION 017300 - EXECUTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes general administrative and procedural requirements governing execution of the Work, including, but not limited to, the following:
 - 1. Construction layout.
 - 2. Installation.
 - 3. Cutting and patching.
 - 4. Coordination of Owner's portion of the Work.
 - 5. Progress cleaning.
 - 6. Starting and adjusting.
 - 7. Protection of installed construction.
 - 8. Correction of the Work.
- B. Related Requirements:
 - 1. Section 017700 "Closeout Procedures" for submitting final property survey with Project Record Documents, recording of Owner-accepted deviations from indicated lines and levels, replacing defective work, and final cleaning.
 - 2. Section 024119 "Selective Demolition" for demolition and removal of selected portions of the building.

1.2 DEFINITIONS

- A. Cutting: Removal of in-place construction necessary to permit installation or performance of subsequent work.
- B. Patching: Fitting and repair work required to restore construction to original conditions after installation of subsequent work.

1.3 INFORMATIONAL SUBMITTALS

- A. Cutting and Patching Plan: Submit plan describing procedures at least 10 days prior to the time cutting and patching will be performed. Include the following information:
 - 1. Extent: Describe reason for and extent of each occurrence of cutting and patching.
 - 2. Changes to In-Place Construction: Describe anticipated results. Include changes to structural elements and operating components as well as changes in building appearance and other significant visual elements.
 - 3. Products: List products to be used for patching and firms or entities that will perform patching work.
 - 4. Dates: Indicate when cutting and patching will be performed.

5. Utilities and Mechanical and Electrical Systems: List services and systems that cutting and patching procedures will disturb or affect. List services and systems that will be relocated and those that will be temporarily out of service. Indicate length of time permanent services and systems will be disrupted.
 - a. Include description of provisions for temporary services and systems during interruption of permanent services and systems.

1.4 QUALITY ASSURANCE

- A. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.
 1. Structural Elements: When cutting and patching structural elements, or when encountering the need for cutting and patching of elements whose structural function is not known, notify Architect of locations and details of cutting and await directions from Architect before proceeding. Shore, brace, and support structural elements during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection.
 2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety. Operational elements include the following:
 - a. Fire-suppression systems.
 - b. Plumbing piping systems.
 - c. Mechanical systems piping and ducts.
 - d. Control systems.
 - e. Communication systems.
 - f. Fire-detection and -alarm systems.
 - g. Electrical wiring systems.
 - h. Operating systems of special construction.
 3. Other Construction Elements: Do not cut and patch other construction elements or components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety. Other construction elements include but are not limited to the following:
 - a. Water, moisture, or vapor barriers.
 - b. Membranes and flashings.
 - c. Exterior curtain-wall construction.
 - d. Equipment supports.
 - e. Piping, ductwork, vessels, and equipment.
 - f. Noise- and vibration-control elements and systems.
 4. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and

patched in a visually unsatisfactory manner.

- B. Manufacturer's Installation Instructions: Obtain and maintain on-site manufacturer's written recommendations and instructions for installation of specified products and equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Comply with requirements specified in other Sections.
- B. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.
 - 1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to Architect for the visual and functional performance of in-place materials. Use materials that are not considered hazardous.
- C. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.
 - 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, gas service piping, and water-service piping; underground electrical services; and other utilities.
 - 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
 - 1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 - 2. Examine walls, floors, and roofs for suitable conditions where products and

- systems are to be installed.
- 3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
- C. Written Report: Where a written report listing conditions detrimental to performance of the Work is required by other Sections, include the following:
 - 1. Description of the Work, including Specification Section number and paragraph, and Drawing sheet number and detail, where applicable.
 - 2. List of detrimental conditions, including substrates.
 - 3. List of unacceptable installation tolerances.
 - 4. Recommended corrections.
- D. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Existing Utility Information: Furnish information to Owner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.
- D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents, submit a request for information to Architect through Construction Manager in accordance with requirements in Section 013100 "Project Management and Coordination."

3.3 CONSTRUCTION LAYOUT

- A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks and existing conditions. If discrepancies are discovered, notify Architect and Construction Manager promptly.
- B. Site Improvements: Locate and lay out site improvements, including pavements, grading, fill and topsoil placement, utility slopes, and rim and invert elevations.

3.4 INSTALLATION

- A. Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical work plumb, and make horizontal work level.
 - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 - 3. Conceal pipes, ducts, and wiring in finished areas unless otherwise indicated.
 - 4. Maintain minimum headroom clearance of 96 inches in occupied spaces and 84 inches in unoccupied spaces, unless otherwise indicated on Drawings.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure satisfactory results as judged by Architect. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations, so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy of type expected for Project.
- E. Sequence the Work and allow adequate clearances to accommodate movement of construction items on-site and placement in permanent locations.
- F. Tools and Equipment: Select tools or equipment that minimize production of excessive noise levels.
- G. Templates: Obtain and distribute to the parties involved templates for Work specified to be factory prepared and field installed. Check Shop Drawings of other portions of the Work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- H. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions with manufacturer.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- I. Joints: Make joints of uniform width. Where joint locations in exposed Work are not indicated, arrange joints for the best visual effect, as judged by Architect. Fit exposed connections together to form hairline joints.

3.5 CUTTING AND PATCHING

- A. General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
 - 1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during installation or cutting and patching operations, by methods and with materials so as not to void existing warranties.
- C. Temporary Support: Provide temporary support of Work to be cut.
- D. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.
- E. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
 - 1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
 - 2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
 - 3. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
 - 4. Excavating and Backfilling: Comply with requirements in applicable Sections where required by cutting and patching operations.
 - 5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
 - 6. Proceed with patching after construction operations requiring cutting are complete.
- F. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other Work. Patch with durable seams that are as invisible as practicable, as judged by Architect. Provide materials and comply with installation requirements specified in other Sections, where applicable.
 - 1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate physical integrity of installation.
 - 2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.

- a. Clean piping, conduit, and similar features before applying paint or other finishing materials.
 - b. Restore damaged pipe covering to its original condition.
- 3. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove in-place floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
 - a. Where patching occurs in a painted surface, prepare substrate and apply primer and intermediate paint coats appropriate for substrate over the patch, and apply final paint coat over entire unbroken surface containing the patch, corner to corner of wall and edge to edge of ceiling. Provide additional coats until patch blends with adjacent surfaces.
- 4. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition and ensures thermal and moisture integrity of building enclosure.
- G. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

3.6 COORDINATION OF OWNER'S PORTION OF THE WORK

- A. Site Access: Provide access to Project site for Owner's construction personnel and Owner's separate contractors.
 - 1. Provide temporary facilities required for Owner-furnished, Contractor-installed and Owner-furnished, Owner-installed products.
- B. Coordination: Coordinate construction and operations of the Work with work performed by Owner's construction personnel and Owner's separate contractors.
 - 1. Construction Schedule: Inform Owner of Contractor's preferred construction schedule for Owner's portion of the Work. Adjust construction schedule based on a mutually agreeable timetable. Notify Owner if changes to schedule are required due to differences in actual construction progress.
 - 2. Preinstallation Conferences: Include Owner's construction personnel and Owner's separate contractors at preinstallation conferences covering portions of the Work that are to receive Owner's work. Attend preinstallation conferences conducted by Owner's construction personnel if portions of the Work depend on Owner's construction.

3.7 PROGRESS CLEANING

- A. Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.

1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, in accordance with regulations.
 - a. Use containers intended for holding waste materials of type to be stored.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Work Areas: Clean areas where Work is in progress to the level of cleanliness necessary for proper execution of the Work.
1. Remove liquid spills promptly.
 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces in accordance with written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Exposed Surfaces: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
- G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways. Comply with waste disposal requirements in Section 015000 "Temporary Facilities and Controls."
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- J. Limiting Exposures: Supervise construction operations to ensure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.
- 3.8 STARTING AND ADJUSTING
- A. Start equipment and operating components to confirm proper operation. Remove

malfunctioning units, replace with new units, and retest.

- B. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.
- C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

3.9 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.
- B. Protection of Existing Items: Provide protection and ensure that existing items to remain undisturbed by construction are maintained in condition that existed at commencement of the Work.
- C. Comply with manufacturer's written instructions for temperature and relative humidity.

3.10 CORRECTION OF THE WORK

- A. Repair or remove and replace damaged, defective, or nonconforming Work. Restore damaged substrates and finishes.
 - 1. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment.
- B. Repair Work previously completed and subsequently damaged during construction period. Repair to like-new condition.
- C. Restore permanent facilities used during construction to their specified condition.
- D. Remove and replace damaged surfaces that are exposed to view if surfaces cannot be repaired without visible evidence of repair.
- E. Repair components that do not operate properly. Remove and replace operating components that cannot be repaired.
- F. Remove and replace chipped, scratched, and broken glass or reflective surfaces.

END OF SECTION 017300

SECTION 017700 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for Contract closeout, including, but not limited to, the following:
 - 1. Substantial Completion procedures.
 - 2. Final Completion procedures.
 - 3. List of incomplete items.
 - 4. Submittal of Project warranties.
 - 5. Final cleaning.
- B. Related Requirements:
 - 1. Section 017823 "Operation and Maintenance Data" for additional operation and maintenance manual requirements.
 - 2. Section 017839 "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.
 - 3. Section 017900 "Demonstration and Training" for requirements to train Owner's maintenance personnel to adjust, operate, and maintain products, equipment, and systems.

1.2 DEFINITIONS

- A. List of Incomplete Items: Contractor-prepared list of items to be completed or corrected, prepared for the Architect's use prior to Architect's inspection, to determine if the Work is substantially complete.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of cleaning agent.
- B. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.
- C. Certified List of Incomplete Items: Final submittal at Final Completion.

1.4 CLOSEOUT SUBMITTALS

- A. Certificates of Release: From authorities having jurisdiction.
- B. Certificate of Insurance: For continuing coverage.
- C. Field Report: For pest-control inspection.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Schedule of Maintenance Material Items: For maintenance material submittal items required by other Sections.

1.6 SUBSTANTIAL COMPLETION PROCEDURES

- A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected (Contractor's "punch list"), indicating the value of each item on the list and reasons why the Work is incomplete.
- B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
 - 1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction, permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 - 2. Submit closeout submittals specified in other Division 01 Sections, including Project Record Documents, operation and maintenance manuals, damage or settlement surveys, property surveys, and similar final record information.
 - 3. Submit closeout submittals specified in individual Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 - 4. Submit maintenance material submittals specified in individual Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Construction Manager. Label with manufacturer's name and model number.
 - a. Schedule of Maintenance Material Items: Prepare and submit schedule of maintenance material submittal items, including name and quantity of each item and name and number of related Specification Section. Obtain Construction Manager's signature for receipt of submittals.
 - 5. Submit testing, adjusting, and balancing records.
 - 6. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
- C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
 - 1. Advise Owner of pending insurance changeover requirements.
 - 2. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
 - 3. Complete startup and testing of systems and equipment.
 - 4. Perform preventive maintenance on equipment used prior to Substantial Completion.
 - 5. Instruct Owner's personnel in operation, adjustment, and maintenance of

- products, equipment, and systems. Submit demonstration and training video recordings specified in Section 017900 "Demonstration and Training."
6. Advise Owner of changeover in utility services.
 7. Participate with Owner in conducting inspection and walkthrough with local emergency responders.
 8. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
 9. Complete final cleaning requirements.
 10. Touch up paint and otherwise repair and restore marred exposed finishes to eliminate visual defects.
- D. Inspection: Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Architect and Construction Manager will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.
1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
 2. Results of completed inspection will form the basis of requirements for Final Completion.

1.7 FINAL COMPLETION PROCEDURES

- A. Submittals Prior to Final Completion: Before requesting final inspection for determining Final Completion, complete the following:
1. Certified List of Incomplete Items: Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. Certified copy of the list will state that each item has been completed or otherwise resolved for acceptance.
 2. Certificate of Insurance: Submit evidence of final, continuing insurance coverage complying with insurance requirements.
 3. Submit pest-control final inspection report.
- B. Inspection: Submit a written request for final inspection to determine acceptance a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Architect and Construction Manager will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.
1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

1.8 LIST OF INCOMPLETE ITEMS

- A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.
 - 1. Organize list of spaces in sequential order, starting with exterior areas first, listed by room or space number.
 - 2. Organize items applying to each space by major element, including categories for ceilings, individual walls, floors, equipment, and building systems.
 - 3. Include the following information at the top of each page:
 - a. Project name.
 - b. Date.
 - c. Name of Architect and Construction Manager.
 - d. Name of Contractor.
 - e. Page number.
 - 4. Submit list of incomplete items in the following format:
 - a. PDF Electronic File: Architect, through Construction Manager, will return annotated file.

1.9 SUBMITTAL OF PROJECT WARRANTIES

- A. Time of Submittal: Submit written warranties on request of Architect for designated portions of the Work where warranties are indicated to commence on dates other than date of Substantial Completion, or when delay in submittal of warranties might limit Owner's rights under warranty.
- B. Partial Occupancy: Submit properly executed warranties within 15 days of completion of designated portions of the Work that are completed and occupied or used by Owner during construction period by separate agreement with Contractor.
- C. Organize warranty documents into an orderly sequence based on the table of contents of Project Manual.
- D. Warranty Electronic File: Provide warranties and bonds in PDF format. Assemble complete warranty and bond submittal package into a single electronic PDF file with bookmarks enabling navigation to each item. Provide bookmarked table of contents at beginning of document.
 - 1. Submit by email to Architect.
- E. Warranties in Paper Form:
 - 1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive **8-1/2-by-11-inch** paper.
 - 2. Provide heavy paper dividers with plastic-covered tabs for each separate

- warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
- F. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:
 - a. Clean Project site of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are not planted, mulched, or paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - f. Remove debris and surface dust from limited-access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and

- similar spaces.
 - g. Clean flooring, removing debris, dirt, and staining; clean in accordance with manufacturer's instructions.
 - h. Vacuum and mop concrete.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; clean in accordance with manufacturer's instructions if visible soil or stains remain.
 - j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - m. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - n. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - o. Clean ducts, blowers, and coils if units were operated without filters during construction or that display contamination with particulate matter on inspection.
 - p. Clean luminaires, lamps, globes, and reflectors to function with full efficiency.
 - q. Clean strainers.
 - r. Leave Project clean and ready for occupancy.
- C. Pest Control: Comply with pest control requirements in Section 015000 "Temporary Facilities and Controls." Prepare written report.
- D. Construction Waste Disposal: Comply with waste-disposal requirements in Section 015000 "Temporary Facilities and Controls."

3.2 CORRECTION OF THE WORK

- A. Complete repair and restoration operations required by "Correction of the Work" Article in Section 017300 "Execution" before requesting inspection for determination of Substantial Completion.

END OF SECTION 017700

SECTION 017823 - OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: Administrative and procedural requirements for preparing operation and maintenance manuals, including the following:
 - 1. Operation and maintenance documentation directory manuals.
 - 2. Emergency manuals.
 - 3. Systems and equipment operation manuals.
 - 4. Systems and equipment maintenance manuals.
 - 5. Product maintenance manuals.
- B. Related Requirements:
 - 1. Section 013300 "Submittal Procedures" for submitting copies of submittals for operation and maintenance manuals.

1.2 DEFINITIONS

- A. System: An organized collection of parts, equipment, or subsystems united by regular interaction.
- B. Subsystem: A portion of a system with characteristics similar to a system.

1.3 CLOSEOUT SUBMITTALS

- A. Submit operation and maintenance manuals indicated. Provide content for each manual as specified in individual Specification Sections, and as reviewed and approved at the time of Section submittals. Submit reviewed manual content formatted and organized as required by this Section.
 - 1. Architect will comment on whether content of operation and maintenance submittals is acceptable.
 - 2. Where applicable, clarify and update reviewed manual content to correspond to revisions and field conditions.
- B. Format: Submit operation and maintenance manuals in the following format:
 - 1. Submit by email to Architect. Enable reviewer comments on draft submittals.
- C. Initial Manual Submittal: Submit draft copy of each manual at least 30 days before commencing demonstration and training. Architect will comment on whether general scope and content of manual are acceptable.

- D. Final Manual Submittal: Submit each manual in final form prior to requesting inspection for Substantial Completion and at least 15 days before commencing demonstration and training. Architect will return copy with comments.
 - 1. Correct or revise each manual to comply with Architect's comments. Submit copies of each corrected manual within 15 days of receipt of Architect's comments and prior to commencing demonstration and training.
- E. Comply with Section 017700 "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

1.4 FORMAT OF OPERATION AND MAINTENANCE MANUALS

- A. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.
 - 1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
 - 2. File Names and Bookmarks: Bookmark individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.

1.5 REQUIREMENTS FOR EMERGENCY, OPERATION, AND MAINTENANCE MANUALS

- A. Organization of Manuals: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual to contain the following materials, in the order listed:
 - 1. Title page.
 - 2. Table of contents.
 - 3. Manual contents.
- B. Title Page: Include the following information:
 - 1. Subject matter included in manual.
 - 2. Name and address of Project.
 - 3. Name and address of Owner.
 - 4. Date of submittal.
 - 5. Name and contact information for Contractor.
 - 6. Name and contact information for Construction Manager.
 - 7. Name and contact information for Architect.
 - 8. Name and contact information for Commissioning Authority.

9. Names and contact information for major consultants to the Architect that designed the systems contained in the manuals.
 10. Cross-reference to related systems in other operation and maintenance manuals.
- C. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.
- D. Identification: In the documentation directory and in each operation and maintenance manual, identify each system, subsystem, and piece of equipment with same designation used in the Contract Documents. If no designation exists, assign a designation in accordance with ASHRAE Guideline 4, "Preparation of Operating and Maintenance Documentation for Building Systems."

1.6 EMERGENCY MANUALS

- A. Emergency Manual: Assemble a complete set of emergency information indicating procedures for use by emergency personnel and by Owner's operating personnel for types of emergencies indicated.
- B. Content: Organize manual into a separate section for each of the following:
1. Type of emergency.
 2. Emergency instructions.
 3. Emergency procedures.
- C. Type of Emergency: Where applicable for each type of emergency indicated below, include instructions and procedures for each system, subsystem, piece of equipment, and component:
1. Fire.
 2. Flood.
 3. Gas leak.
 4. Water leak.
 5. Power failure.
 6. Water outage.
 7. System, subsystem, or equipment failure.
 8. Chemical release or spill.
- D. Emergency Instructions: Describe and explain warnings, trouble indications, error messages, and similar codes and signals. Include responsibilities of Owner's operating personnel for notification of Installer, supplier, and manufacturer to maintain warranties.
- E. Emergency Procedures: Include the following, as applicable:
1. Instructions on stopping.
 2. Shutdown instructions for each type of emergency.
 3. Operating instructions for conditions outside normal operating limits.
 4. Required sequences for electric or electronic systems.
 5. Special operating instructions and procedures.

1.7 SYSTEMS AND EQUIPMENT OPERATION MANUALS

- A. Systems and Equipment Operation Manual: Assemble a complete set of data indicating operation of each system, subsystem, and piece of equipment not part of a system. Include information required for daily operation and management, operating standards, and routine and special operating procedures.
 - 1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
 - 2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.
- B. Content: In addition to requirements in this Section, include operation data required in individual Specification Sections and the following information:
 - 1. System, subsystem, and equipment descriptions. Use designations for systems and equipment indicated on Contract Documents.
 - 2. Performance and design criteria if Contractor has delegated design responsibility.
 - 3. Operating standards.
 - 4. Operating procedures.
 - 5. Operating logs.
 - 6. Wiring diagrams.
 - 7. Control diagrams.
 - 8. Piped system diagrams.
 - 9. Precautions against improper use.
 - 10. License requirements including inspection and renewal dates.
- C. Descriptions: Include the following:
 - 1. Product name and model number. Use designations for products indicated on Contract Documents.
 - 2. Manufacturer's name.
 - 3. Equipment identification with serial number of each component.
 - 4. Equipment function.
 - 5. Operating characteristics.
 - 6. Limiting conditions.
 - 7. Performance curves.
 - 8. Engineering data and tests.
 - 9. Complete nomenclature and number of replacement parts.
- D. Operating Procedures: Include the following, as applicable:
 - 1. Startup procedures.
 - 2. Equipment or system break-in procedures.
 - 3. Routine and normal operating instructions.
 - 4. Regulation and control procedures.
 - 5. Instructions on stopping.
 - 6. Normal shutdown instructions.
 - 7. Seasonal and weekend operating instructions.

8. Required sequences for electric or electronic systems.
 9. Special operating instructions and procedures.
- E. Systems and Equipment Controls: Describe the sequence of operation, and diagram controls as installed.
- F. Piped Systems: Diagram piping as installed, and identify color coding where required for identification.

1.8 SYSTEMS AND EQUIPMENT MAINTENANCE MANUALS

- A. Systems and Equipment Maintenance Manuals: Assemble a complete set of data indicating maintenance of each system, subsystem, and piece of equipment not part of a system. Include manufacturers' maintenance documentation, preventive maintenance procedures and frequency, repair procedures, wiring and systems diagrams, lists of spare parts, and warranty information.
1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
 2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.
- B. Content: For each system, subsystem, and piece of equipment not part of a system, include source information, manufacturers' maintenance documentation, maintenance procedures, maintenance and service schedules, spare parts list and source information, maintenance service contracts, and warranties and bonds as described below.
- C. Source Information: List each system, subsystem, and piece of equipment included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.
- D. Manufacturers' Maintenance Documentation: Include the following information for each component part or piece of equipment:
1. Standard maintenance instructions and bulletins; include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.
 - a. Prepare supplementary text if manufacturers' standard printed data are not available and where the information is necessary for proper operation and maintenance of equipment or systems.
 2. Drawings, diagrams, and instructions required for maintenance, including

- disassembly and component removal, replacement, and assembly.
 - 3. Identification and nomenclature of parts and components.
 - 4. List of items recommended to be stocked as spare parts.
 - E. Maintenance Procedures: Include the following information and items that detail essential maintenance procedures:
 - 1. Test and inspection instructions.
 - 2. Troubleshooting guide.
 - 3. Precautions against improper maintenance.
 - 4. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - 5. Aligning, adjusting, and checking instructions.
 - 6. Demonstration and training video recording, if available.
 - F. Maintenance and Service Schedules: Include service and lubrication requirements, list of required lubricants for equipment, and separate schedules for preventive and routine maintenance and service with standard time allotment.
 - 1. Scheduled Maintenance and Service: Tabulate actions for daily, weekly, monthly, quarterly, semiannual, and annual frequencies.
 - 2. Maintenance and Service Record: Include manufacturers' forms for recording maintenance.
 - G. Spare Parts List and Source Information: Include lists of replacement and repair parts, with parts identified and cross-referenced to manufacturers' maintenance documentation and local sources of maintenance materials and related services.
 - H. Maintenance Service Contracts: Include copies of maintenance agreements with name and telephone number of service agent.
 - I. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
 - 1. Include procedures to follow and required notifications for warranty claims.
 - J. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in record Drawings to ensure correct illustration of completed installation.
 - 1. Do not use original project record documents as part of maintenance manuals.
- 1.9 PRODUCT MAINTENANCE MANUALS
- A. Product Maintenance Manual: Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.
 - B. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair

materials and sources, and warranties and bonds, as described below.

- C. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.
- D. Product Information: Include the following, as applicable:
 - 1. Product name and model number.
 - 2. Manufacturer's name.
 - 3. Color, pattern, and texture.
 - 4. Material and chemical composition.
 - 5. Reordering information for specially manufactured products.
- E. Maintenance Procedures: Include manufacturer's written recommendations and the following:
 - 1. Inspection procedures.
 - 2. Types of cleaning agents to be used and methods of cleaning.
 - 3. List of cleaning agents and methods of cleaning detrimental to product.
 - 4. Schedule for routine cleaning and maintenance.
 - 5. Repair instructions.
- F. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.
- G. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
 - 1. Include procedures to follow and required notifications for warranty claims.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017823

SECTION 017839 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for Project Record Documents, including the following:
 - 1. Record Drawings.
 - 2. Record specifications.
 - 3. Record Product Data.
 - 4. Miscellaneous record submittals.
- B. Related Requirements:
 - 1. Section 017300 "Execution" for final property survey.
 - 2. Section 017700 "Closeout Procedures" for general closeout procedures.
 - 3. Section 017823 "Operation and Maintenance Data" for operation and maintenance manual requirements.

1.2 CLOSEOUT SUBMITTALS

- A. Record Drawings: Comply with the following:
 - 1. Number of Copies: Submit one set(s) of marked-up record prints.
- B. Record Specifications: Submit annotated PDF electronic files of Project's Specifications, including addenda and Contract modifications.
- C. Record Product Data: Submit annotated PDF electronic files and directories of each submittal.
- D. Reports: Submit written report weekly indicating items incorporated into Project Record Documents concurrent with progress of the Work, including revisions, concealed conditions, field changes, product selections, and other notations incorporated.

1.3 RECORD DRAWINGS

- A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised drawings as modifications are issued.
 - 1. Preparation: Mark record prints to show the actual installation, where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.

- a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an acceptable drawing technique.
 - c. Record data as soon as possible after obtaining it.
 - d. Record and check the markup before enclosing concealed installations.
 - e. Cross-reference record prints to corresponding photographic documentation.
 2. Content: Types of items requiring marking include, but are not limited to, the following:
 - a. Dimensional changes to Drawings.
 - b. Revisions to details shown on Drawings.
 - c. Depths of foundations.
 - d. Locations and depths of underground utilities.
 - e. Revisions to routing of piping and conduits.
 - f. Revisions to electrical circuitry.
 - g. Actual equipment locations.
 - h. Duct size and routing.
 - i. Locations of concealed internal utilities.
 - j. Changes made by Change Order or Construction Change Directive.
 - k. Changes made following Architect's written orders.
 - l. Details not on the original Contract Drawings.
 - m. Field records for variable and concealed conditions.
 - n. Record information on the Work that is shown only schematically.
 3. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
 4. Mark record prints with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
 5. Mark important additional information that was either shown schematically or omitted from original Drawings.
 6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.
- B. Format: Identify and date each Record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
1. Record Prints: Organize record prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
 2. Format: Annotated PDF electronic file with comment function enabled.
 3. Identification: As follows:
 - a. Project name.
 - b. Date.
 - c. Designation "PROJECT RECORD DRAWINGS."
 - d. Name of Architect.
 - e. Name of Contractor.

1.4 RECORD SPECIFICATIONS

- A. Preparation: Mark Specifications to indicate the actual product installation, where installation varies from that indicated in Specifications, addenda, and Contract modifications.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
 - 3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made.
 - 4. For each principal product, indicate whether Record Product Data has been submitted in operation and maintenance manuals instead of submitted as Record Product Data.
 - 5. Note related Change Orders, Record Product Data, and Record Drawings where applicable.
- B. Format: Submit record specifications as annotated PDF electronic file.

1.5 RECORD PRODUCT DATA

- A. Recording: Maintain one copy of each submittal during the construction period for Project Record Document purposes. Post changes and revisions to Project Record Documents as they occur; do not wait until end of Project.
- B. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
 - 3. Note related Change Orders, Record Specifications, and Record Drawings where applicable.
- C. Format: Submit Record Product Data as annotated PDF electronic file.
 - 1. Include Record Product Data directory organized by Specification Section number and title, electronically linked to each item of Record Product Data.

1.6 MAINTENANCE OF RECORD DOCUMENTS

- A. Maintenance of Record Documents: Store Record Documents in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to Project Record Documents for Architect's and Construction Manager's reference during normal working hours.

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

PROJECT RECORD DOCUMENTS
SECTION 017839 - 4

PART 2 - PRODUCTS (Not Used)
PART 3 - EXECUTION (Not Used)

END OF SECTION 017839

SECTION 017900 - DEMONSTRATION AND TRAINING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for instructing Owner's personnel, including the following:
 - 1. Instruction in operation and maintenance of systems, subsystems, and equipment.
 - 2. Demonstration and training video recordings.

1.2 INFORMATIONAL SUBMITTALS

- A. Instruction Program: Submit outline of instructional program for demonstration and training, including a list of training modules and a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module.
 - 1. Indicate proposed training modules using manufacturer-produced demonstration and training video recordings for systems, equipment, and products in lieu of video recording of live instructional module.
- B. Qualification Data: For facilitator.
- C. Attendance Record: For each training module, submit list of participants and length of instruction time.
- D. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.

1.3 CLOSEOUT SUBMITTALS

- A. Demonstration and Training Video Recordings: Submit two copies within seven days of end of each training module.
 - 1. Identification: On each copy, provide an applied label with the following information:
 - a. Name of Project.
 - b. Name and address of videographer.
 - c. Name of Architect.
 - d. Name of Construction Manager.
 - e. Name of Contractor.
 - f. Date of video recording.

2. Transcript:
 - a. Prepared in PDF electronic format. Include a cover sheet with same label information as the corresponding video recording and a table of contents with links to corresponding training components. Include name of Project and date of video recording on each page.
3. At completion of training, submit complete training manual(s) for Owner's use prepared in same PDF file format required for operation and maintenance manuals specified in Section 017823 "Operation and Maintenance Data."

1.4 QUALITY ASSURANCE

- A. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
- B. Preinstruction Conference: Conduct conference at Project site to comply with requirements in Section 013100 "Project Management and Coordination." Review methods and procedures related to demonstration and training including, but not limited to, the following:
 1. Inspect and discuss locations and other facilities required for instruction.
 2. Review and finalize instruction schedule and verify availability of educational materials, instructors' personnel, audiovisual equipment, and facilities needed to avoid delays.
 3. Review required content of instruction.
 4. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

1.5 COORDINATION

- A. Coordinate instruction schedule with Owner's operations. Adjust schedule as required to minimize disrupting Owner's operations and to ensure availability of Owner's personnel.
- B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
- C. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data have been reviewed and approved by Architect.

1.6 INSTRUCTION PROGRAM

- A. Program Structure: Develop an instruction program that includes individual training modules for each system and for equipment not part of a system, as required by

individual Specification Sections.

- B. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following as applicable to the system, equipment, or component:

1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Performance and design criteria if Contractor is delegated design responsibility.
 - c. Operating standards.
 - d. Regulatory requirements.
 - e. Equipment function.
 - f. Operating characteristics.
 - g. Limiting conditions.
 - h. Performance curves.
2. Documentation: Review the following items in detail:
 - a. Emergency manuals.
 - b. Systems and equipment operation manuals.
 - c. Systems and equipment maintenance manuals.
 - d. Product maintenance manuals.
 - e. Project Record Documents.
 - f. Identification systems.
 - g. Warranties and bonds.
 - h. Maintenance service agreements and similar continuing commitments.
3. Emergencies: Include the following, as applicable:
 - a. Instructions on meaning of warnings, trouble indications, and error messages.
 - b. Instructions on stopping.
 - c. Shutdown instructions for each type of emergency.
 - d. Operating instructions for conditions outside of normal operating limits.
 - e. Sequences for electric or electronic systems.
 - f. Special operating instructions and procedures.
4. Operations: Include the following, as applicable:
 - a. Startup procedures.
 - b. Equipment or system break-in procedures.
 - c. Routine and normal operating instructions.
 - d. Regulation and control procedures.
 - e. Control sequences.
 - f. Safety procedures.
 - g. Instructions on stopping.
 - h. Normal shutdown instructions.

- i. Operating procedures for emergencies.
 - j. Operating procedures for system, subsystem, or equipment failure.
 - k. Seasonal and weekend operating instructions.
 - l. Required sequences for electric or electronic systems.
 - m. Special operating instructions and procedures.
- 5. Adjustments: Include the following:
 - a. Alignments.
 - b. Checking adjustments.
 - c. Noise and vibration adjustments.
 - d. Economy and efficiency adjustments.
- 6. Troubleshooting: Include the following:
 - a. Diagnostic instructions.
 - b. Test and inspection procedures.
- 7. Maintenance: Include the following:
 - a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Procedures for routine cleaning.
 - e. Procedures for preventive maintenance.
 - f. Procedures for routine maintenance.
 - g. Instruction on use of special tools.
- 8. Repairs: Include the following:
 - a. Diagnosis instructions.
 - b. Repair instructions.
 - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - d. Instructions for identifying parts and components.
 - e. Review of spare parts needed for operation and maintenance.

1.7 PREPARATION

- A. Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a training manual organized in coordination with requirements in Section 017823 "Operation and Maintenance Data."
- B. Set up instructional equipment at instruction location.

1.8 INSTRUCTION

- A. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Owner

for number of participants, instruction times, and location.

- B. Scheduling: Provide instruction at mutually agreed-on times. For equipment that requires seasonal operation, provide similar instruction at start of each season.
 - 1. Schedule training with Owner, through Construction Manager, with at least seven days' advance notice.
- C. Training Location and Reference Material: Conduct training on-site in the completed and fully operational facility using the actual equipment in-place. Conduct training using final operation and maintenance data submittals.
- D. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of a demonstration performance-based test.
- E. Cleanup: Collect used and leftover educational materials and give to Owner. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017900

SECTION 02 01 20 - PROTECTION OF UNDERGROUND FACILITIES AND SURVEY
MONUMENTS

PART 1 - GENERAL

1.1 UNDERGROUND FACILITIES

- A. Shown or Indicated: The information and data shown or indicated in the Contract Documents with respect to existing underground facilities at or contiguous to the Site is based on information and data furnished to Owner or Engineer by the owners of such underground facilities, including Owner, or by others.
1. Owner and Engineer shall not be responsible for the accuracy or completeness of any such information or data; and
 2. The cost of all of the following will be included in the Contract Price, and Contractor shall have full responsibility for:
 - a. Reviewing and checking all such information and data,
 - b. Locating all Underground Facilities shown or indicated in the Contract Documents,
 - c. Coordination of the Work with the owners of such underground facilities, including Owner, during construction, and
 - d. The safety and protection of all such underground facilities and repairing any damage thereto resulting from the Work.
- B. Not Shown or Indicated: If an underground facility is uncovered or revealed at or contiguous to the Site which was not shown or indicated with reasonable accuracy in the Contract Documents, the following shall apply.
1. Contractor shall develop and execute a work-plan, subject to Engineer's approval to protect underground facilities.
 2. The Contractor shall expose, prior to staking and trenching, all existing utilities and existing facilities which may control proposed facility grades, and alignment. Two working days notice shall be given to the Engineer prior to commencing this work.
 3. Full compensation for all costs involved in locating, verifying, protecting, exposing, and otherwise providing for utilities shall be included in the amounts bid for the various items of work, and no separate payment shall be made therefore.

1.2 PROTECTION

- A. The Contractor shall not interrupt the service function or disturb the supporting base of any Utility by disrupting any facility identified in the Plans and Specifications

without authority from the Owner or order from the Engineer. Where protection of such facilities is required to ensure support of utilities, the Contractor shall, unless otherwise provided, furnish and place the necessary protection at the Contractor's expense.

- B. The Contractor shall be prepared at all times with labor, equipment and materials to make repair on damaged mains or Utility facilities. The Contractor shall immediately notify the Engineer and the Utility owner if he disturbs, disconnects or damages any Utility. The Contractor shall bear the costs of repair or replacement of any Utility facility described with reasonable accuracy in the Plans and Specifications that is damaged by the Contractor. No extra compensation will be made for the repair of any services or mains damaged by the Contractor, nor for any damage incurred if the neglect or failure of providing protective barriers, lights and other devices or means required to protect such existing utilities or facilities described with reasonable accuracy in the Plans and Specifications.

1.3 SURVEY MARKERS AND PERMANENT REFERENCE POINTS

A. Surveying and Permanent Survey Markers

The Engineer will take measurements to assure the preservation of survey markers (monuments and bench marks). The Contractor shall not disturb permanent survey markers without the consent of Engineer and shall bear the expense of replacing any that may be disturbed without permission.

1. Replacement of survey markers shall be done only by the Engineer or a licensed Land Surveyor.
2. If disturbing of markers cannot be avoided, the Owner shall pay the cost of replacing said markers.

B. Lot Corner Monuments

The Contractor shall preserve property line and corner survey markers except where their destruction is unavoidable and the Contractor is proceeding in accordance with accepted practice. Markers that are lost or disturbed by his operations shall be replaced at the Contractor's expense by the Engineer.

END OF SECTION 020120

SECTION 024100 - DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The work of this section consists of demolition and removal of pavements, slabs, miscellaneous debris, signs, barriers, salvaged items, and portions of abandoned utilities.
- B. Definitions:
 - 1. Portland Cement Concrete: A mixture of Portland cement, fine aggregate, coarse aggregate, admixtures (if used) and water, proportioned and mixed. Also, included is rebar.
 - 2. Asphalt Concrete: A mixture of liquid asphalt and graded aggregate used as paving material for roadways and parking lots.

1.2 WORK INCLUDED

- A. Repair and restoration of areas damaged due to demolition work.
- B. Salvaging of equipment for Owner.
- C. Removal of demolished materials from site.
- D. Remove existing dismantled and broken concrete benches.
- E. Properly dispose of all removed materials.
- F. Dewatering as needed in order to complete the proposed demolition.
- G. Removal of trees and landscaping as required for construction.

1.3 RELATED WORK

- A. Section 01 57 23 – Storm Water Pollution Prevention Plan
- B. Section 01 57 27 – Dust Control
- C. Section 03 33 15 – Concrete Walks, Curbs, Gutters, and Driveways
- D. Section 31 11 00 – Clearing and Grubbing
- E. Section 31 23 00 – Earthwork

1.4 SEQUENCING

- A. Sequence work to minimize interference with operation of existing facility.

1.5 REGULATORY REQUIREMENTS

- A. Obtain required permits from County of Fresno and San Joaquin Air Pollution Control District.
- B. Dispose of removed materials in an approved disposal or salvage facility.

1.6 REFERENCES

- A. Section 17-2 – Clearing and Grubbing, State Standard Specifications
- B. Section 19 – Earthwork, State Standard Specifications

1.7 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures
- B. Demolition plan including sequence of operations. The plan shall specifically address methods of demolition, schedule, sequence of demolition, and procedures for archeological monitoring. Demolition shall not proceed until the plan has been approved.

1.8 QUALITY ASSURANCE

- A. General: Take all necessary precautions with regard to safety in carrying out the demolition and site work. Erect suitable barriers around open excavations and fulfill all appropriate requirements of CAL/OSHA. Comply with safety requirements for demolition, ANSI A10.6-90.

1.9 PROJECT CONDITIONS

- A. Underground utilities exist at this site. Contractor shall take all necessary precautions to protect said utilities. Notify Engineer of any deviation in utility location from that which is shown on the drawings.
- B. Keep dust to a minimum at removal site and on haul roads. Use sprinklers or water trucks as necessary or as directed by the Engineer.
- C. Ensure safety of persons in demolition area. Provide temporary barricades as required.
- D. Excavations may encounter groundwater and require dewatering depending on the time of year and amount of seasonal run-off. Loose sands exposed in excavation sidewalls may be unstable and require shoring or lying back in accordance with OSHA requirements. Flowing sands may also be encountered in excavations below groundwater levels.

1.10 CLOSEOUT SUBMITTALS

- A. As specified in Section 01 77 00 – Closeout Procedures.

- B. Show all capped and abandoned utility terminations and location of remaining facilities on project Record Drawings.

PART 2 - PRODUCTS

2.1 REPAIR AND RESTORATION MATERIALS

- A. Concrete shall be as specified in Section 03 33 15 – Concrete Walks, Curbs, Gutters, and Driveways.
- B. Backfill materials shall be as required by Section 19 – Earthwork, State Standard Specifications.
- C. Asphalt and concrete shall be replaced in conformance with governing authority standards.

2.2 MATERIALS

- A. Salvaged Materials: Materials to be salvaged shall remain the property of the Owner and shall be stockpiled as directed by the Engineer. Contractor shall inventory all salvaged materials. Stockpiled materials shall be free of hazardous substances. Salvage materials include:
- B. Items to be Salvaged and Relocated shall be salvaged and/or relocated as shown on the drawings, or as directed by the Engineer.
- C. Materials and items demolished and not designated for reuse, salvage or transfer to the Owner, as well as all debris, rubbish and other materials resulting from the demolition operations, shall become the property of the Contractor and shall be removed from the site within 48 hours of demolition.
- D. Storage or sale of the removed items will not be permitted at the site.
- E. As directed by the Engineer, recycled materials, Portland cement concrete and asphalt concrete, may be used in engineered fill and/or crushed miscellaneous base if it meets State Standard Specification, Section 26, Class 2 Aggregate Base, ¾-inch maximum.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Prior to demolition, inspect the site conditions, verifying all governing dimensions, notes and specification. Notify the Engineer of any errors or omissions in the contract documents.
- B. Make such explorations and probes as are necessary to ascertain any required protection measures before proceeding with the demolition and removal work.

3.2 PREPARATION

- A. Protect existing, appurtenances, structures, which are not to be demolished.
- B. Prior to demolition work, all soil erosion control measures specified in Section 01 57 23 - Stormwater Pollution Prevention Plan (SWPPP) and inlet protection barriers shall be in place. Contractor shall provide appropriate measures to prohibit demolition debris and/or soil from entering any watercourse.
 - 1. Protect all buildings, structures, utilities, and vegetation to remain.

3.3 DEMOLITION REQUIREMENTS

- A. Conduct demolition to protect and minimize damage to structures and existing improvements.
- B. Conduct salvaging to protect and minimize damage to salvaged equipment.
- C. Execute the work in a careful, orderly and safe manner, with the least possible disturbance to the public. Cease operations immediately if adjacent work appears to be endangered. Do not resume operations until corrective measures have been taken.
- D. Pavement and Slabs:
 - 1. Remove completely all Portland cement concrete slabs-on-grade including, but not limited to, equipment pads, sidewalks, etc. If approved by the Engineer, the Contractor may crush Portland concrete for use as aggregate base.
 - 2. Saw cut existing asphalt concrete pavements cleanly in straight continuous lines. Remove asphalt concrete pavement as shown on the drawings.
 - 3. In areas that are demolished, but where no future roads or structures are shown, the exposed subgrade shall be scarified an additional 18 inches before placing backfill.
- E. Concrete and Masonry Structures: Remove structure to a minimum of 3 feet below grade. Break remaining portions to permit drainage. Remove completely if under proposed structures or roadways.
- F. Items to be Salvaged: Remove as directed by the Engineer. Remove carefully. All salvaged material remains the property of the Owner. Store where directed by the Engineer.
- G. Abandoned Utilities: Remove above ground utilities and terminate as approved by the utility company and the Engineer.

3.4 PRESERVATION

- A. If indicated or required, preserve trees, plants, rock outcroppings, or other features designated to remain. Protect trees and plants from damage; fell trees in a manner which shall not injure standing trees, plants and improvements which are to be preserved.

3.5 RESTORATION

- A. All demolition areas, staging/stockpiling, and open excavations shall be filled in accordance with the Earthwork Sections. Fill all open excavations deeper than one foot to an elevation to match the surrounding topography.

- 1. New Construction Areas: As shown on drawings.

END OF SECTION 024100

SECTION 024119 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

A. The Work of this Section Includes:

1. Demolition and removal of selected portions of exterior or interior of building or structure and site elements.
2. Removal and salvage of existing items for delivery to Owner and removal of existing items for reinstallation.

B. Related Requirements:

1. Section 015639 "Temporary Tree and Plant Protection" for temporary protection of existing trees and plants that are affected by selective demolition.
2. Section 017300 "Execution" for cutting and patching procedures.
3. Section 311100 "Clearing and Grubbing" for site clearing and removal of above- and below-grade improvements not part of selective demolition.

1.2 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of off-site unless indicated to be removed and salvaged or removed and reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner as indicated.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage; prepare for reuse; and reinstall where indicated.
- D. Existing to Remain: Existing items of construction that are not to be removed.

1.3 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.
- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.
1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.4 COORDINATION

- A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

1.5 PREINSTALLATION MEETINGS

- A. Predemolition Conference: Conduct conference at Project site.
 - 1. Inspect and discuss condition of construction to be selectively demolished.
 - 2. Review structural load limitations of existing structure.
 - 3. Review and finalize selective demolition schedule and verify availability of demolition personnel, equipment, and facilities needed to make progress and avoid delays.
 - 4. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
 - 5. Review areas where existing construction is to remain and requires protection.
 - 6. Review and finalize protection requirements.
 - 7. Review storage, protection, and accounting for items to be removed for salvage or reinstallation.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Statements: For refrigerant recovery technician.
- B. Schedule of Selective Demolition Activities: Indicate the following:
 - 1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity.
 - 2. Temporary interruption of utility services. Indicate how long utility services will be interrupted.
 - 3. Coordination for shutoff, capping, and continuation of utility services.
- C. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed in accordance with EPA regulations. Include name and address of technician and date refrigerant was recovered.
- D. Warranties: Documentation indicating that existing warranties are still in effect after completion of selective demolition.

1.7 CLOSEOUT SUBMITTALS

- A. Inventory: Submit a list of items that have been removed and salvaged.

1.8 QUALITY ASSURANCE

- A. Refrigerant Recovery Technician Qualifications: Universal certified by an EPA-approved certification program.

1.9 FIELD CONDITIONS

- A. Owner will not occupy portions of building immediately adjacent to selective demolition area.
- B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
 - 1. Before selective demolition, Owner will remove the following items:
 - a. Existing equipment not attached to building and not scheduled for reuse.
 - b. Existing doors and door frames not scheduled for reuse.
- C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.
- D. Hazardous Materials:
 - 1. It is not expected that hazardous materials will be encountered in the Work.
 - a. Hazardous materials will be removed by Owner before start of the Work.
 - b. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
- E. On-site sale of removed items or materials is not permitted.

1.10 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so as not to void existing warranties. Notify warrantor before proceeding. Existing warranties include the following:
 - 1. Roofing system.
- B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- B. Standards: Comply with ANSI/ASSP A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- B. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video.
 - 1. Inventory and record the condition of items to be removed for salvage or reinstallation. Photograph or video conditions that might be misconstrued as damage caused by removal.
 - 2. Photograph or video existing conditions of adjoining construction including finish surfaces, that might be misconstrued as damage caused by selective demolition operations or removal of items for salvage or reinstallation.

3.2 PREPARATION

- A. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 - 1. Strengthen or add new supports when required during progress of selective demolition.
- B. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 - 1. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 - 2. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 - 3. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls."
- C. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location and cleaned and reinstalled in their original locations after selective demolition operations are complete.
- D. Refrigerant: Before starting demolition, remove refrigerant from mechanical equipment in accordance with 40 CFR 82 and regulations of authorities having jurisdiction.

3.3 UTILITY SERVICES AND BUILDING SYSTEMS

- A. Existing Services/Systems to Remain: Maintain utilities and building systems and equipment to remain and protect against damage during selective demolition operations.
 - 1. Maintain fire-protection facilities in service during selective demolition operations.
- B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utilities and building systems serving areas to be selectively demolished.
 - 1. Arrange to shut off utilities with utility companies.
 - 2. If disconnection of utilities and building systems will affect adjacent occupied parts of the building, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to those parts of the building.
 - 3. Demolish and remove existing building systems, equipment, and components indicated on Drawings to be removed.
 - a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - b. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
 - c. Equipment to Be Removed: Disconnect and cap services and remove equipment and components.
 - 4. Abandon existing building systems, equipment, and components indicated on Drawings to be abandoned in place.
 - a. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
 - b. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material and leave in place.
 - 5. Remove and reinstall/salvage existing building systems, equipment, and components indicated on drawings to be removed and reinstalled or removed and salvaged:
 - a. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment and components; when appropriate, reinstall, reconnect, and make equipment operational.
 - b. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and components and deliver to Owner.

3.4 SALVAGE/REINSTALL

- A. Removed and Salvaged Items:
 - 1. Clean salvaged items.

2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
3. Store items in a secure area until delivery to Owner.
4. Transport items to Owner's storage area designated by Owner.
5. Protect items from damage during transport and storage.

B. Removed and Reinstalled Items:

1. Clean and repair items to functional condition adequate for intended reuse.
2. Pack or crate items after cleaning and repairing. Identify contents of containers.
3. Protect items from damage during transport and storage.
4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.

3.5 SELECTIVE DEMOLITION, GENERAL

A. General: Demolish and remove existing construction only to extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:

1. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.
2. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
3. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
4. Maintain fire watch during and for at least 2 hours after flame-cutting operations.
5. Maintain adequate ventilation when using cutting torches.
6. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
7. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
8. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.

B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed trafficways if required by authorities having jurisdiction.
2. Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations. Do not use water

when it may damage adjacent construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site and dispose of them in an EPA-approved construction and demolition waste landfill acceptable to authorities having jurisdiction.
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning: Do not burn demolished materials.

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

SECTION 03 10 00
CONCRETE FORMWORK

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Formwork for cast-in-place concrete with shoring, bracing and anchorage.
- B. Openings for other work.
- C. Form accessories.
- D. Form stripping.
- E. Related Sections
 - 1. Section 03 20 00 Concrete Reinforcement.
 - 2. Section 03 30 00 Cast-In Place Concrete.
 - 3. Section 03 39 00, Concrete Curing.

1.2 REFERENCES

- A. ACI 117 - Standard Tolerances for Concrete Construction and Materials.
- B. ACI 318-16 - Building Code Requirements for Structural Concrete.
- C. PS-1 - Construction and Industrial Plywood.
- D. California Code of Regulations, Title 8 Subchapter 4. Construction Safety Orders, Article 29, Erection and Construction, Section 1717.
- E. Chapter 19, 2022 California Building Code.
- F. APA - American Plywood Association Design and Construction Guide.
- G. Local AQMD - Air Quality Management District.

1.3 DESIGN REQUIREMENTS

- A. Design, engineer and construct formwork, shoring and bracing to conform to ACI 318 Section 26.11. Resultant concrete to conform to required shape, line and dimension. Design of formwork is Contractor's responsibility.
- B. The formwork shall be designed for the loads and lateral pressures outlined in Chapter 2 of ACI 347R, and lateral forces as specified by the CBC.

- C. Above grade forms for elevated slabs and for walls exceeding 4 ft. in height shall be designed by a professional Civil or Structural engineer registered in the State of California.
- D. Foundation concrete may be placed directly into neat excavations, provided foundation trench walls are sufficiently stable. Otherwise, minimum formwork is mandatory to ensure clean excavations and properly formed surfaces immediately prior to and during placing of concrete.

1.4 COORDINATION

- A. Coordinate this Section with other Sections of work that require attachment of components to formwork.
- B. If formwork is placed after reinforcement resulting in insufficient concrete cover over reinforcement, Contractor shall adjust reinforcement positioning to accomplish required cover or otherwise request instructions from Architect before proceeding.

1.5 SUBMITTALS

- A. Submit specification for type of form material to use for each exposed surface to be formed.

PART 2 PRODUCTS

2.1 FORM MATERIALS

- A. Plywood: APA - MDO (Medium Density Overlay) Plyform, Group 1, Exterior, PS-1, for exposed surfaces. APA - BB (No-overlay) Plyform, Class 1, Exterior, PS-1 for unexposed surfaces.
- B. Lumber: Douglas Fir species; construction grade with grade stamp clearly visible.

2.2 FORMWORK ACCESSORIES

- A. Form Release Agent: Colorless non-staining liquid chemical agent, free of wax or oils which will not absorb water. Material shall comply with AQMD, Local Regulations.
- B. Corners: Chamfered type; maximum possible lengths.
- C. Nails, Spikes, Lag Bolts, Through Bolts, Anchorages: Sized as required, of sufficient strength and character to maintain formwork in place while placing concrete.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify lines, levels and centers before proceeding with formwork. Ensure that dimensions agree with Drawings.

3.2 ERECTION - FORMWORK

- A. Erect formwork, shoring and bracing to achieve design requirements in accordance with requirements of ACI 318 Section 26.11.
 - 1. Where public areas such as sidewalks and streets are to be shored, drawings and calculations are to be submitted by Contractor to the city or governing agency for approval prior to beginning of any work.
 - 2. Contractor and/or his engineer assume and accept all responsibility for construction and safety of formwork and shoring.
 - 3. Upon completion of Work, formwork and shoring materials are to be removed from site at expense of Contractor. Certain steel and/or concrete materials may be left in place with written approval of Architect.
- B. Provide bracing to ensure stability of formwork. Shore or strengthen formwork subject to overstressing by construction loads.
- C. Arrange and assemble formwork to permit dismantling and stripping. Do not damage concrete during stripping. Permit removal of remaining principal shoring. Conform to Title 8, Subchapter 4, Construction Safety Orders, CCR.
- D. Align joints and make watertight. Keep form joints to a minimum.
- E. Obtain approval before framing openings in structural members that are not indicated on Drawings.
- F. Provide chamfer strips on external corners.
- G. Surface irregularities, ACI 347R Class A, gradual or abrupt irregularities of 1/8 inch for exposed to view concrete. Class B, 1/4 inch for plaster cement finish.

3.3 APPLICATION - FORM RELEASE AGENT

- A. Apply form release agent on formwork in accordance with manufacturer's recommendations.
- B. Apply prior to placement of reinforcing steel, anchoring devices and embedded items.
- C. Do not apply form release agent where concrete surfaces will receive special finishes or applied coverings that are affected by agent. Soak inside surfaces of untreated forms with clean water. Keep surfaces coated prior to placement of concrete.

3.4 *INSERTS, EMBEDDED PARTS AND OPENINGS*

- A. Provide formed openings where required for items to be embedded in or passing through concrete work. No openings or embedded items permitted in structural slabs within 18 inches of columns. Conform to ACI 318 Section 26.11.
- B. Locate and set in place items that will be cast directly into concrete.
- C. Coordinate work of other Sections in forming and placing openings, slots, reglets, recesses, chases, sleeves, bolts, anchors and other inserts, whether indicated on the structural drawings or not.
- D. Install accessories in accordance with manufacturer's instructions, straight, level and plumb. Ensure items are not disturbed during concrete placement.
- E. Provide temporary ports or openings in formwork where required to facilitate cleaning and inspection. Locate openings at bottom of forms to allow flushing water to drain.
- F. Close temporary openings with tight fitting panels, flush with inside face of forms and neatly fitted so joints will not be apparent in exposed concrete surfaces.

3.5 *FORM CLEANING*

- A. Clean and remove foreign matter within forms as erection proceeds.
- B. Clean formed cavities of debris prior to placing concrete.
- C. Flush with water or use compressed air to remove remaining foreign matter. Ensure that water and debris drain to exterior through clean-out ports.

3.6 *FORMWORK TOLERANCES*

- A. Construct formwork to maintain tolerances required by ACI 117.

3.7 *FIELD QUALITY CONTROL*

- A. Inspect erected formwork, shoring, and bracing to ensure that work is in accordance with formwork design and that supports, fastenings, wedges, ties and items are secure.

3.8 *FORM REMOVAL*

- A. Do not remove forms or bracing until concrete has gained sufficient strength to carry its own weight and imposed loads. Conform to ACI 318 Section 26.11.2.
 - 1. Minimum stripping time for edges of slabs and footings: 3 days.
- B. Loosen forms carefully. Do not wedge pry bars, hammers or tools against finish concrete surfaces scheduled for exposure to view. Do not break-off corners.

- C. Store removed forms in manner that surfaces to be in contact with fresh concrete will not be damaged. Discard damaged forms. Re-shoring permitted only after 10 days from stripping.

END OF SECTION

SECTION 03 20 00
CONCRETE REINFORCEMENT

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Fabricating and setting reinforcing steel and accessories for cast-in-place concrete.
- B. Related Sections:
 - 1. Section 03 10 00, Concrete Formwork
 - 2. Section 03 30 00, Cast-in Place Concrete

1.2 REFERENCES

- A. ACI 315 - Details and Detailing of Concrete Reinforcing.
- B. ACI 318-16 - Building Code Requirements for Structural Concrete and Commentary.
- C. ASTM A1064 – Standard Specification for Carbon-steel Wire and Welded Wire Reinforcement, Plain and Deformed, for concrete.
- D. ASTM A615 - Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
- E. ASTM A706 - Specification for Deformed and Plain Low-Alloy Steel Deformed Bars for Concrete Reinforcement.
- F. CRSI - Concrete Reinforcing Steel Institute Manual of Practice.
- G. Chapter 19, 2022 California Building Code.

1.3 SUBMITTALS

- A. Shop Drawings, indicating bar sizes, spacings, locations and quantities of reinforcing steel bending and cutting schedules and supporting and spacing devices.

1.4 QUALITY ASSURANCE

- A. Provide Testing Laboratory with access to fabrication plant to facilitate inspection of reinforcement. Provide notification of commencement and duration of shop fabrication in sufficient time to allow inspection.
- B. Comply with the requirements of Division 01 General Requirements.

1.5 COORDINATION

- A. Coordinate with placement of formwork, formed openings and other Work.

PART 2 PRODUCTS

2.1 REINFORCEMENT

- A. Reinforcing Steel: ASTM A615, deformed billet steel bars, in grades as follows, and conforming to ACI 318 Chapter 20 and Section 26.6.
- B. For No.4 and larger bars, use 60 ksi yield grade.
 - 1. For ties and stirrups, and No. 3 and smaller bars, use 40 or 60 ksi yield grade.
- C. Welded Wire Reinforcement: Plain type, ASTM A1064; in flat sheets; uncoated finish, 6 x 6 - W4.0 x W4.0 unless otherwise noted on drawings.

2.2 ACCESSORY MATERIALS

- A. Tie Wire: Minimum 16 gauge black annealed type.
- B. Chairs, Bolsters, Bar Supports, Spacers: Sized and shaped for strength and support of reinforcement during concrete placement conditions.
- C. Special Chairs, Bolsters, Bar Supports, Spacers Adjacent to Weather Exposed Concrete Surfaces: Plastic coated steel type; size and shape as required.
- D. Concrete Blocks: Approximately 3 inches dimension each side.

2.3 FABRICATION

- A. Fabricate concrete reinforcing in accordance with CRSI Manual of Practice and ACI 315 and ACI 318. Wherever possible, make bends to shape in fabricator's shop.
- B. Bars reduced in section will not be accepted.
 - 1. Bars with kinks are unacceptable.
 - 2. Bars shall not be heated to facilitate bending or for any other purpose.
 - 3. Bars with bends not indicated on drawings will not be accepted. Perform no forming in a manner which will damage bars.
 - 4. Re-bending of bars prohibited.
- C. Locate reinforcing splices not indicated on Drawings at point of minimum stress.

PART 3 EXECUTION

3.1 PLACEMENT

- A. General: Comply with CBC and CRSI's "Manual of Standard Practice" for placing reinforcement.
- B. Place, support and secure reinforcement against displacement. Do not deviate from required position. Install concrete blocks to support reinforcement over grade. Rocks not permitted.
- C. Do not displace or damage vapor barrier where vapor barrier is specified or indicated on drawings. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.
- D. Accommodate placement of formed openings.
- E. Prior to placing, thoroughly clean reinforcement of all rust, dirt, dust, oil or any other material deleterious to bonding of concrete.
- F. Accurately place and securely tie reinforcement with black annealed wire and securely hold in position during placing of concrete by means of precast concrete block supports. Point wire tie ends away from the form. Unless otherwise indicated, the number, type, and spacing of supports shall conform to the ACI 315.
- G. Tie reinforcement splices and intersections per CBC and CRSI, Chapter 10- General Principles for Placing, Splicing and Tying Reinforcing Bars.
- H. During placing of structural concrete slabs, provide a full-time reinforcing steel placer to repair and replace reinforcing to its proper location. Provide additional chairs of the proper size available to place under bars displaced during the concrete pouring operation.
- I. Dowels for Walls: Securely tie in place prior to placing of concrete. Do not place dowels in concrete after pour.
- J. Conform to ACI 318-14 Section 20.6.1.3.1, and Structural Drawings for concrete cover over reinforcement. Where conflicts occur between the referenced documents, the more stringent shall apply.
 - 1. Where fire protective cover is specified exceeding the ACI and structural drawing specification, the fire protective cover shall apply.

END OF SECTION

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Cast-in-place concrete.
- B. Concrete slabs on grade, footings and curbs for walls.
- C. Concrete over structural metal composite floor deck.
- D. Control, expansion and contraction joint devices associated with concrete work including joint sealants.
- E. Related Sections
 - 1. Section 03 10 00, Concrete Formwork
 - 2. Section 03 20 00, Concrete Reinforcement
 - 3. Section 03 39 00, Concrete Curing
 - 4. Section 03 33 15, Concrete Walks, Curbs, Gutters & Driveways

1.2 REFERENCES

- A. CBC – 2022 California Building Code
- B. CBC Chapter 19, Concrete
- C. ADA - Americans with Disabilities Act of 1990
- D. ADA/Standards - ADA Title II Regulations and the DOJ/Standards for Accessible Design
- E. ACI 301 - Structural Concrete for Buildings.
- F. ACI 318-2016 - Building Code Requirements for Structural Concrete and Commentary. 1.ASTM C33 - Concrete Aggregate.
- G. ASTM C150 - Portland Cement.
- H. ASTM C171 - Sheet Materials for Curing Concrete.
- I. ASTM C1107 - Packaged Dry, Hydraulic - Cement Grout (Nonshrink).
- J. ASTM C1116 - Specification for Fiber-Reinforced Concrete.

- K. ASTM D1751 - Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Bituminous Type).
- L. ASTM E96 - Water Vapor Transmission of Materials.
- M. CSS - Caltrans Standard Specifications, Latest Edition.

1.3 *SUBMITTALS*

- A. Placement Schedule: Submit for approval details and/or sketches showing location of each proposed construction joint. Do not deviate from locations of horizontal joints indicated on drawings.
- B. Product data for each type of manufactured material and product included.
- C. Design mix for each concrete mix specified.
- D. Steel reinforcement shop drawings, including material, grade bar schedules, spacing, bent bar diagrams, arrangement and supports.
- E. Submit contraction (crack control) joint, expansion, isolation and construction joint layout to Architect for approval.

1.4 *PROJECT RECORD DOCUMENTS*

- A. Accurately record actual locations of embedded utilities and components that are concealed from view.
- B. Maintain an accurate record showing date and time of concrete placement in each portion of structure. Correlate placing record for test cylinders made by testing laboratory.
- C. Maintain a separate record giving date of removal of forms, shoring, including first and second halves and reshoring, if used. Keep records available for inspection at site. Upon completion, deliver two copies of each to Architect in approved form.

1.5 *QUALITY ASSURANCE*

- A. Perform Work in accordance with Section 1905, California Building Code, and ACI 318.1 and 318.3.
- B. Maintain one copy of all records.
- C. Acquire cement and aggregate from same source for all work.
- D. Conform to ACI Chapter 26.5.5 when concreting during hot weather. No concrete placement permitted above 90 degrees Fahrenheit. Limit concrete temperature to 95 degrees Fahrenheit.
- E. Conform to ACI Chapter 26.5.4 when concreting during cold weather. No concrete placement permitted below 50 degrees Fahrenheit.

1.6 COORDINATION

- A. Coordinate the placement of joint devices with erection of concrete formwork and placement of form accessories.

PART 2 PRODUCTS

2.1 CONCRETE MATERIALS

- A. Cement: ASTM C150, Type II. Portland Cement Type, conforming to Section 903A, California Building Code.
- B. Aggregates:
 - 1. Aggregate for Stone Concrete: ASTM C33.
 - 2. Aggregate for Lightweight Concrete: ASTM C330.
- C. Conform to requirements on structural drawings for maximum size of aggregate permitted in individual applications.
- D. Water: Clear, from potable source, and not detrimental to concrete.

2.2 ACCESSORIES

- A. Bonding Agent: ASTM C631, Polyvinyl Acetate Latex emulsion; HIBOND, manufactured by Lambert Corporation, Orlando FL, LOCK BOND NO. 906, manufactured by Macklanburg-Duncan Co., City of Industry, CA, or equal as approved in accordance with Division 01, General Requirements for Substitutions.
- B. Curing Film: See Section 03 39 00.
- C. Non-Shrink Grout: ASTM C1107, Premixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing agents; capable of developing minimum compressive strength of 5,000 psi in 24 hours and 8,000 psi in 7 days; of consistency suitable for application and a 30 minute working time.
- D. Vapor Barrier at interior slabs: ASTM E 1745, Class A, 15 mils thick, Permeance as tested before and after mandatory conditioning (ASTM E 1745 Section 7.1 and subparagraphs 7.1.1 - 7.1.5): less than 0.01 grains/(ft² · hr · inHg). WVTR less than or equal to 0.012 perms as tested by ASTM E: 96
- E. Acceptable Products
 - 1. 15 mil Stegowrap Vapor Barrier, Stego Industries LLC
 - 2. Reef Industries, VaporGuard
 - 3. W.R. Meadows Premoulded membrane with plasmatic core.
 - 4. Or equal, as approved in accordance with Division 01 requirements for substitutions.

- F. Reinforcement: In accordance with Section 03 20 00.
- G. Concrete Formwork: In accordance with Section 03 10 00.

2.3 JOINT DEVICES AND FILLER MATERIALS

- A. Expansion Joint Filler - ASTM D1751: Close cell bituminous saturated fiberboard, 1/2 inch thick; Fiber Expansion Joint manufactured by American Highway Technology, Kankakee, IL, W. R. Meadows, or approved equal.
- B. Expansion Joint Top: Integral extruded polystyrene plastic; 1/2 inch thick, with removable top strip exposing sealant trough, JOINT CAPS manufactured by The Burke Company, or equal as approved in accordance with Division 01, General Requirements for substitutions.
- C. Joint Backing: ASTM C1330, Cylindrical, Type C, closed cell, polyethylene backer rod; oversized 30 to 50 percent larger than joint width. Green Rod by Nomaco Inc. or equal.
- D. Sealant: Polyurethane multi-component type, non-sagging or self leveling at flatwork, as specified in Section 07 92 00.
- E. Primer: As recommended by sealant manufacturer.
- F. Saw-Cut Joint Filler: Two-component epoxy resin, gray color, non-hardening, self-leveling, SIKADUR 51 (SL), by Sikacorp., Lyndhurst, NJ, or equal as approved in accordance with Division 01 General Requirements for Substitutions.

2.4 CONCRETE MIX

- A. Mix and deliver concrete in accordance with Section 1905, California Building Code.
- B. Deliver concrete in transit mixers only. Discharge loads in less than 1-1/2 hours after water is first added.
- C. Design Mix: ACI 318 Chapter 26. Ingredients and proportions for design mix shall be selected by a DSA-approved Testing Laboratory certified by a registered civil engineer licensed in California in conformance with the limitations specified on the structural drawings, unless otherwise approved under the Substitution Request submittal procedures of this Specification.
- D. Required Strength: As noted on the structural drawings.
- E. Select proportions by volume for concrete in accordance with the approved design mix.
- F. All mix designs for this project to be installed in areas to receive moisture sensitive flooring, as specified in the Architect's documents, shall include a 15% flyash substitute for cement by volume. Class "C" flyash is not permitted.
- G. Do not exceed water-cement ratios by weight for concrete items as specified on the structural drawings.

- H. Comply with structural drawings for other limitations to each mix design specified.
- I. Miscellaneous Sitework Concrete: Specified in Section 03 33 15, Concrete Walks, Curbs, Gutters & Driveways.

2.5 GROUT MIX

- A. 1:3:2 parts Portland Cement, to sand, to pea gravel, at minimum 2000 psi at 28 days.

2.6 DRYPACK

- A. Cement/sand mix of consistency to pack dry below base plates and other components as specified. Minimum 5,000 psi.
- B. Nonshrink Grout: ASTM C1107, premixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing agents; capable of developing minimum compressive strength of 5,000 psi minimum in 7 days; of consistency for application and a 30 minute working time. Acceptable Manufacturers: Dayton Superior, Miamisburg, OH; Sonneborn, Shakopee, MN; Novex Systems International, Clifton NJ, or equal.
- C. Alternate flowable cementitious fill material may be used if properly dammed and consolidated below components. Minimum 5,000 psi.

2.7 GRANULAR FILL

- A. Crushed Aggregate Base (capillary break): 3/4 inch maximum grading, crushed rock and rock dust conforming to requirements of Section 200-2.2, SSPWC, with 3/8 inch sieve requirement waived, or Class 2 Aggregate Base as defined in Section 26, CSS.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify site conditions.
- B. Verify compaction has been completed per specifications.
- C. Verify requirements for concrete cover over reinforcement.
- D. Verify that anchors, seats, plates, reinforcement and other items to be cast into concrete are accurately placed, positioned securely and will not cause hardship in placing concrete.

3.2 PREPARATION

- A. Prepare previously placed concrete by cleaning with sandblasting to remove laitance and expose clean aggregate.

- B. In locations where new concrete is doweled to existing work, drill and clean holes in existing concrete in accordance with the ICC ESR report specified on the structural drawings for the type of epoxy indicated. All non-structural epoxy dowel applications require IOR inspection during installation. All structural epoxy dowel applications will be subject to "special inspection and testing" at Structural Engineer's direction.
- C. When approved by the Architect, clean previously placed concrete with steel brush and apply bonding agent in accordance with manufacturer's instructions.
- D. Under Interior Slabs on Grade: Install 4 inches thick crushed aggregate base per Section 200-2.2, SSPWC or Class 2 CCS as capillary break. Over aggregate base place 15-mil vapor barrier in largest practical sections. Seal all 6-inch lapped seams, penetrations and foundation perimeters using manufacturer-approved tape only and install per manufacturer instructions. Install pipe boots at pipe penetrations. Install reinforcement and concrete as scheduled. Install 1 1/2" of coarse, washed sand over Vapor Barrier.
- E. Installation of vapor barrier shall be in accordance with ASTM E 1643 and manufacturer's instructions.
- F. Tapes, mastics, sealants, and other products used with vapor barrier shall be from same manufacturer as, and certified compatible with, vapor barrier.
- G. Install steel reinforcing per Section 03 20 00, Concrete Reinforcement.

3.3 *PLACING CONCRETE*

- A. Place concrete in accordance with ACI 318 Section 26.5.2. Remove loose dirt from excavations.
- B. Notify Architect minimum 24 hours prior to commencement of operations. All excavations, forms and reinforcing shall be inspected and approved by the "special inspector" and Architect prior to placement.
- C. Ensure reinforcement, inserts, embedded parts, formed joint fillers, joint devices and accessories are not disturbed during concrete placement.
- D. Install joint fillers, primer and sealant in accordance with manufacturer's instructions.
- E. When detailed on the drawings, separate slabs on grade from vertical surfaces with 1/2 inch thick joint filler.
- F. Extend joint filler from bottom of slab to within 1/2 inch of finished slab surface using two-component polyurethane sealant as specified in Section 07 92 00.
- G. Install joint devices in accordance with manufacturer's instructions as detailed.
- H. Install construction joint device in coordination with floor slab pattern placement sequence. Set top to required elevations. Secure to resist movement by wet concrete.

- I. Maintain joint device in correct position to allow joint cover flush with finish.
- J. Install joint covers in longest practical length.
- K. Place concrete continuously between predetermined expansion, control and construction joints.
- L. Install expansion joints at vertical concrete walls at 24 feet on center unless noted otherwise on drawings.
- M. Retaining Walls at Buildings: install waterstops in expansion joints to form a continuous waterproofed wall surface condition. Support and protect exposed waterstops during progress of the Work.
- N. Do not interrupt successive placement; do not permit cold joints to occur.
- O. Avoid segregation of materials. Perform vibrating so as to produce a dense, smooth application free of rock pockets and voids. Do not use vibrators to move concrete horizontally.
- P. Provide special mix prepared by the Testing Laboratory and approved by the Architect utilizing smaller aggregates in areas of reinforcing congestion to prevent the formation of rock pockets.
- Q. The unconfined vertical drop of concrete shall not be greater than 5 feet. Do not allow concrete to fall free from any height that will cause materials to segregate. Maximum height of free fall permitted in any case: 5 feet. Utilize trunks or additional chutes where doubt occurs. Conform to requirements of ACI 318 Section 5.10.
- R. Horizontal Construction Joints: Wash surface of each joint shortly after pouring to expose clean, sound aggregate. Sandblast surface to remove laitance remaining or loose aggregate as approved by the Architect. Conform to ACI 318 Section 5.7.
- S. Screed floors and slabs on grade level, maintaining surface flatness of maximum 1/8 inch in 10 ft. Slope floors for drains.
- T. Isolation Joints: preformed joint filler depth of slab, fill top 1/2 inch with elastomeric sealant per Section 07 92 00. Locations: at columns, footings, and as noted on drawings.
- U. Surface irregularities, ACI 347R Class A, gradual or abrupt irregularities of 1/8 inch for exposed to view concrete. Class B, 1/4 inch for plaster cement finish.

3.4 CURING AND PROTECTION

- A. In accordance with Section 03 39 00 Concrete Curing.

3.5 FIELD QUALITY CONTROL

- A. Provide free access to Work and cooperate with Architect, DSA and Testing Laboratory

- B. Measure floor and slab flatness and levelness according to ASTM E1155 (ASTM E 1155M) within 72 hours of finishing.
- C. Proposed mix design of each class of concrete shall conform to Section 1905A, California Building Code and shall be approved by the Architect prior to commencement of work.

3.6 *PATCHING*

- A. Architect will inspect concrete surfaces and determine imperfections, if any.
- B. Patch imperfections as approved and in accordance with ACI 301.
- C. Clean all exposed concrete surfaces and all adjoining work stained by leakage of concrete. Remove all fins, butts and projections by grinding. Patch voids, rock pockets, holes, cracks and similar imperfections by chipping loose concrete and exposing clean, sound aggregate.
- D. Fill cone form tie recesses with Portland cement mortar flush to finish surface.

3.7 *DEFECTIVE CONCRETE*

- A. Defective Concrete: Remove concrete not conforming to required lines, details, dimensions, tolerances or specified requirements.
- B. Repair or replacement of defective concrete will be determined by the Architect.
- C. Do not patch, fill, touch-up, repair or replace exposed concrete except upon express approval of Architect for each individual area.
- D. Repairs of Concrete shall comply with the ACI and written directive from the *ARCHITECT*.

3.8 *MOISTURE TEST FOR CONCRETE FLOORS*

- A. Test and, if required, remediate all interior concrete slabs-on-grade scheduled to receive new moisture sensitive floor finishes.

END OF SECTION

SECTION 033315 - CONCRETE WALKS, CURBS, GUTTERS AND DRIVEWAYS

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. The work of this section consists of constructing on-site concrete flatwork, walks, curbs, and gutters.

1.2 RELATED WORK

- A. Section 03 10 00 – Concrete Formwork
- B. Section 03 20 00 – Concrete Reinforcement
- C. Section 03 39 00 – Concrete Curing
- D. Section 31 23 00 – Earthwork
- E. Section 32 11 23 – Aggregate Base

1.3 REFERENCES

- A. County of Fresno Standard Specifications
- B. Section 40 – Concrete Pavement, State Standard Specifications
- C. Section 90 –Concrete, State Standard Specifications
- D. ASTM C172 – Sampling Fresh Concrete
- E. California Test 540 – Method for Making, Handling and Storage of Concrete

1.4 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures.

1.5 QUALITY ASSURANCE

- A. Concrete testing will be the responsibility of the Owner. All costs of initial testing will be paid by the Owner unless otherwise noted. All costs involved in retesting of concrete required because of a failure to meet these Specifications shall be at the expense of the Contractor, including those required by the Engineer.
- B. The Contractor shall cooperate by rerouting equipment or by temporarily closing the work area being tested.
- C. Contractor is responsible to schedule concrete tests to be conducted by the Owner's contracted independent testing laboratory. Laboratory shall take, prepare, and cure

samples, and do all field and laboratory testing. Promptly submit five copies of test reports to the Engineer. Testing shall comply with Section 90-1.01D Quality Assurance of the State Standard Specifications.

1. Strength Tests: Strength tests shall be made from each 100 cubic yards of concrete or fraction thereof each day. For each test, four cylinders shall be molded, one to be used for a 7-day test, two for 28-day test and one for a hold.
2. Air Content and Slump Tests: At the time samples are taken for strength tests, the laboratory shall make slump and air content tests.

1.6 PROJECT CONDITIONS:

- A. Place concrete only when temperatures are above 35 degrees F, unless it is protected from freezing and approved in advance by the Engineer. Comply with ACI318 – 26.5.4.
- B. Place concrete only when the temperatures are below 95 degrees F, unless the mix is adjusted to compensate for cooling and approved in advance by the Engineer. Comply with ACI318 – 26.5.5.

PART 2 - PRODUCTS

2.1 CONCRETE

- A. Materials: Materials, including cement, aggregates, water, and admixtures, shall meet the requirements of Section 90 of the State Standard Specifications.
 1. Cement: Type II/V.
 2. Coarse Aggregate: Maximum size, 1-inch for hand methods, 3/4-inch for slip-form construction, and 1/2-inch for extruded curbs. For machine placed concrete, Contractor may, with Owner's approval, modify the aggregate grading specified to meet the recommendations of the manufacturer of the machine.
- B. Slump:
 1. Concrete Walks: Maximum 4 inches.
 2. Curbs and Gutter:
 - a. Hand Vibrated: Maximum 3 inches.
 - b. Slip-Formed: Maximum 2 inches.
- C. Strength: 4,000 psi for concrete pavements and 3,000 psi for site flatwork, sidewalks, curbs and gutters at 28 days.

- D. Manufacture and Delivery: Measurement of materials, batching, mixing, transporting, and delivery shall be as specified in ASTM C94. Discharge concrete into forms within 1-1/2 hours after introduction of water to cement. When temperature of concrete is 85 degrees F or above, the time between introduction of water to cement and complete discharge of concrete into forms shall not exceed 45 minutes.
- E. Other admixtures complying with ASTM C494 or ASTM C618 may be used with approval of Engineer. No chlorides will be permitted.
- F. Slurry cement backfill used in lieu of compacted soil shall contain not less than 188-pounds of Type II Portland Cement per cubic yard of concrete (2 sack) and shall comply with Section 19 of the State Standard Specifications.

2.2 REINFORCING STEEL

- A. Rebar shall be ASTM A615, Grade 60.
- B. Welded wire fabric shall conform to ASTM A1064.

2.3 EXPANSION JOINT FILLERS

- A. ASTM D994, preformed bituminous type, 1/2-inch thick.

2.4 CURING COMPOUND

- A. In accordance with Section 90 of the State Standard Specifications.

2.5 CURING MATERIAL

- A. Waterproof paper, polyethylene sheet, clean burlap, cotton mats, or other approved material that will not cause stain or discoloration.
- B. Using curing compound or curing materials, thoroughly cure and protect concrete keeping the surface moist for 7 days. Cure slabs with integral color in accordance with instructions of the pigment manufacturer. On exposed aggregate slabs or slabs with integral color, do not use polyethylene or paper sheeting.

PART 3 - EXECUTION

3.1 PREPARATION OF SUBGRADE

- A. Excavate to required depth. Remove soft, yielding material and replace with select fill. Scarify and compact subgrade soils to a density of not less than 95 percent of the maximum dry density.

3.2 MAINTENANCE OF SUBGRADE

- A. Maintain subgrade in a compacted condition until concrete is placed.

3.3 FORMS

- A. Metal or uniform warp-free lumber, coated with form release agent. Grade forms to give slabs positive drainage and stake securely. Obtain approval of alignment and grade before placing concrete.

3.4 PLACING

- A. Concrete slabs for walks shall be formed, placed, vibrated, and finished by hand using conventional methods. Concrete curbs or curbs and gutters may be constructed in the same manner, but Contractor has the option of machine placing curbs using the extrusion method or machine placing curb and gutter using the slip-form method.
- B. Place concrete on moistened subgrade monolithically between construction joints. Deposit to full depth in one operation. Consolidate immediately. After depositing concrete, screed and darby or bullfloat.

3.5 FORM REMOVAL

- A. Remove forms within 24 hours after concrete placement. Repair minor defects with mortar. Plastering will not be permitted on exposed faces.

3.6 SLAB FINISHING

- A. After darbying or bullfloating, stop finishing until bleeding has ceased and until concrete can support foot pressure with only about 1/4-inch indentation. Edge and joint, then float the slab. Use steel trowel to densify surface, then broom slab perpendicular to line of traffic.

3.7 JOINTS

- A. Construct joints true to line with faces perpendicular to surface.
 - 1. Isolation Joints: Separate walks from walls, stairways, and other structures, using expansion joint fillers.
 - 2. Contraction (Control) Joints: Space joints at intervals about equal to width of walk to a depth of 1/3 the slab thickness. Space curb and gutter joints not over 12 feet 6 inches on center and align them with sidewalk joints. Contraction joints may be either sawn or tooled.
 - a. Sawn: Cut with a power saw fitted with an abrasive or diamond blade within 4 to 12 hours after walk has been placed and finished. Use sawn joints on exposed aggregate.
 - b. Tooled: Form plane of weakness by inserting and later removing a metal divider, finish with an edger or a groover, or by saw cutting a previously tooled joint.

3.8 SIDEWALK RESTORATION

- A. Where sections of miscellaneous sidewalk work require removal and restoration the following shall apply:
 - 1. The surface of the sidewalk shall match the existing weakened plane joints, score joints and construction joint patterns with the adjoining sidewalks or City or County standards.
 - 2. Where short sections of sidewalk have been removed for replacement, a minimum distance of three (3) feet section of sidewalk shall be removed or as directed by the Engineer.
 - 3. If curbs and gutters cannot be cut off square and neat, the entire curb and gutter shall be removed to the nearest weakened plane or expansion joint. No patching at joints will be permitted.

3.9 FIELD QUALITY CONTROL

- A. Surfaces shall not vary more than 5/16 inch when tested with a 10-foot straightedge, nor curb gutters and valley gutters shall not vary more than .25 inch from design grade.

END OF SECTION 033315

SECTION 03 39 00
CONCRETE CURING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Initial and final curing of horizontal and vertical concrete surfaces, excluding site work concrete.

1.2 REFERENCES

- A. ACI 318-14 - Building Code Requirements for Structural Concrete.
- B. ACI 301 - Structural Concrete for Buildings.
- C. ASTM C171 - Sheet Materials for Curing Concrete.

1.3 QUALITY ASSURANCE

- A. Perform Work in accordance with ACI 318 Section 26.5.3 and ACI 308R. Proper curing of concrete shall be the Contractor's responsibility. Improperly cured concrete in the opinion of the Architect shall be removed and replaced at no extra cost to the Owner.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect and handle sheet film materials to avoid puncturing or damage of any kind.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Polyethylene Film ASTM C171; 10 mil thick, clear, manufactured from virgin resin with no scrap or additives, manufactured by Burke By Edoco, Long Beach, CA, or equal as approved in accordance with Division 01, General Requirements for Substitutions.
- B. Water: Potable and not detrimental to concrete.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify substrate conditions.
- B. Verify that substrate surfaces are ready to be cured.

3.2 *EXECUTION - HORIZONTAL SURFACES*

- A. Immediately after placement, protect concrete from premature drying, excessively hot or cold temperatures and mechanical injury.
- B. Maintain concrete with minimal moisture loss at above 50 degrees F temperature for period necessary for hydration of cement and hardening of concrete. Maintain concrete temperature below 95 degrees F. Dusting with dry cement to absorb excess water is prohibited.
- C. Cure floor surfaces only as specified herein and in accordance with Section 1905A.11 CBC. Membrane curing compound method not permitted for interior cast-in-place concrete slabs.
- D. Moisture Retaining Coverings: spread polyethylene film over floor slab areas, lapping edges and sides, minimum 6 inches and sealing with pressure sensitive tape; cover with plywood or otherwise protect film from damage; maintain in place for minimum of seven (7) days unless noted otherwise on drawings. Do not permit traffic over floor slabs during the seven (7) day curing period.
- E. Vertical Surfaces: fog spray water over surfaces and maintain wet for 10 days.
- F. Quality Control: Proper curing of concrete surfaces shall be the responsibility of the Contractor under this section.
- G. Flooding, sprinkling or ponding not permitted.

3.3 *EXECUTION - VERTICAL SURFACES*

- A. Spraying: Spray water over surfaces and maintain wet for 10 days.

3.4 *PROTECTION OF FINISHED WORK*

- A. Protect finished Work from damage caused by the work of other sections.
- B. Do not permit traffic over unprotected floor surface.

END OF SECTION

SECTION 04 22 00
CONCRETE UNIT MASONRY

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes furnishing and installing the following for buildings and fences:

Concrete masonry precision units as indicated in drawings, with special shapes and score patterns as indicated or required.

1. Concrete masonry fence unit as indicated in drawings including precision with special size, shapes and score patterns as indicated or required.
2. All reinforcement, grout, mortar and accessories.

- B. Related Sections:

1. Division 3 Section, "Cast-in-Place Concrete"
2. Division 5 Section, "Metal Fabrications"

1.2 REFERENCES

- A. ASTM International (ASTM)

1. ASTM C33 – Standard Specification for Concrete Aggregates.
2. ASTM C90-11b — Standard Specification for Load-Bearing Concrete Masonry Units.
3. ASTM C129 – Standard Specification for Non-Load-Bearing Concrete Masonry Units.
4. ASTM C140-12 – Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units.
5. ASTM C270-12 – Standard Specification for Mortar for Unit Masonry.
6. ASTM C476-10 – Standard Specification for Grout for Masonry.
7. ASTM C1019 – Standard Test Method for Sampling and Testing Grout.
8. ASTM C578, Type X – Specification for Rigid Cellular Polystyrene Thermal Insulation.
9. ASTM A615 – Gr. 60 – Standard Specification for reinforcing steel.

- B. Building Code Requirements and Specification for Masonry Structures:

1. TMS 402-16/602-16

- C. 2022 California Building Code (CBC)
- D. National Concrete Masonry Association (NCMA):
 - 1. NCMA TEK Bulletin #8-2A – Removal of Stains from Concrete Masonry.
 - 2. NCMA TEK Bulletin #8-3A – Control and Removal of Efflorescence.
 - 3. NCMA TEK Bulletin #9-4A – Grouts for Concrete Masonry.
 - 4. NCMA TEK Bulletin #19-4 – Flashing for Concrete Masonry.
 - 5. NCMA TEK Bulletin #3-1B – All-Weather Concrete Masonry Construction.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
- B. Product data for each different masonry unit, accessory, and other manufactured product indicated.
- C. Shop drawings for reinforcing detailing fabrication, bending, and placement of unit masonry reinforcing bars. Comply with ACI 315 "Details and Detailing of Concrete Reinforcing" showing bar schedules, stirrup spacing, diagrams of bent bars, and arrangement of masonry reinforcement.
- D. Material certificates for the following signed by manufacturer and Contractor certifying that each material complies with requirements.
 - 1. Each different cement product required for mortar and grout including name of manufacturer, brand, type, and weight slips at time of delivery.
 - 2. Each material and grade indicated for reinforcing bars.
 - 3. Each type and size of joint reinforcement.
- E. Material test reports from a qualified independent testing laboratory employed and paid by Contractor indicating and interpreting test results relative to compliance of the following proposed masonry materials with requirements indicated:
 - 1. Mortar complying with property requirements of ASTM C 270.
 - 2. Grout mixes. Include description of type and proportions of grout ingredients.
 - 3. Masonry units.
- F. Results from tests and inspections performed by Owner's representatives will be reported promptly and in writing to Architect and Contractor.
- G. Submit Warranties in accordance with Section 01 77 00, Closeout Procedures.

1.4 QUALITY ASSURANCE

- A. Concrete Unit Masonry shall conform to the 2022 edition of the California Building Code (CBC).
- B. Unit Masonry Standard: Comply with TMS 402-16 and TMS 602-16, "Building code Requirements and Specifications for Masonry Structures." Also comply with recommendations in referenced ASTM Standards and NCMA Bulletins where more stringent than TMS and CBC requirements.
- C. Inspecting Laboratory Qualifications: To qualify for employment in performing tests and inspection specified in this Section, an independent testing laboratory must demonstrate to Architect's satisfaction, based on evaluation of laboratory-submitted criteria conforming to ASTM C 1093, that it has the experience and capability to conduct satisfactorily the testing indicated without delaying the progress of the Work.
- D. Material Testing: Owner will employ and pay a qualified independent testing laboratory to perform the following material testing indicated as well as other inspecting and testing services required by referenced unit masonry standard or indicated herein for source and field quality control:
 - 1. Concrete Masonry Unit Tests: For each different concrete masonry unit indicated, units will be tested for strength, absorption, and moisture content per ASTM C 140.
 - 2. Grout compressive strength will be tested per ASTM C 1019
 - 3. Mortar compressive strength will be tested per ASTM C 270.
 - 4. Drying shrinkage testing per ASTM C426-10: Not required for this project.
- E. Contractor is responsible for the scheduling of materials testing. Material testing schedule shall not interrupt the project construction schedule, unless test results provide unsatisfactory results requiring adjustments in material mix designs and fabrications requiring further testing.
- F. Single-Source Responsibility for Masonry Units: Obtain exposed masonry units of uniform texture and color, or a uniform blend within the ranges accepted for these characteristics, from one manufacturer for each different product required for each continuous surface or visually related surfaces.
- G. Single-Source Responsibility for Mortar Materials: Obtain mortar ingredients of uniform quality, including color for exposed masonry, from one manufacturer for each cementitious component and from one source and producer for each aggregate.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver masonry materials to project in undamaged condition.
- B. Store and handle masonry units off the ground, under cover, and in a dry location to prevent their deterioration or damage due to moisture, temperature changes, contaminants, corrosion, and other causes. If units become wet, do not place until units are in an air-dried condition.

- C. Store cementitious materials off the ground, under cover, and in dry location.
- D. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.
- E. Store masonry accessories including metal items to prevent corrosion and accumulation of dirt and oil.

1.6 PROJECT CONDITIONS

- A. Protection of Masonry: During erection, cover tops of walls, projections, and sills with waterproof sheeting at end of each day's work. Cover partially completed masonry when construction is not in progress.
- B. Stain Prevention: Prevent grout, mortar, and soil from staining the face of masonry to be left exposed or painted. Remove immediately any grout, mortar, and soil that come in contact with such masonry.
 - 1. Protect base of walls from rain-splashed mud and mortar splatter by means of coverings spread on ground and over wall surface.
 - 2. Protect sills, ledges, and projections from mortar droppings.
- C. Cold-Weather Construction: Comply with referenced unit masonry standard for cold-weather construction and the following:
 - 1. Do not lay masonry units that are wet or frozen.
 - 2. Remove masonry damaged by freezing conditions.
 - 3. Comply with TMS 402, Section 1.8 C.
- D. Hot-Weather Construction: Comply with referenced unit masonry standard for hot-weather construction and the following:
 - 1. Comply with TMS 402, Section 1.8 D.

PART 2 PRODUCTS

2.1 MATERIALS, GENERAL

- A. Comply with referenced unit masonry standard and other requirements specified in this Section applicable to each material indicated.
- B. Acceptable manufacturer: Basalite, 1201 Golden State Blvd., Selma, CA 93662, Tel: 559-896-1649, or approved equal.
- C. Substitutions will be considered only in accordance with Section 01 25 00, submitted a minimum of 14 days prior to bid submittal date and approved prior to bid.

2.2 CONCRETE MASONRY UNITS

- A. General: Comply with requirements indicated below applicable to each form of concrete masonry unit required.

1. Provide special shapes and colors where indicated and as follows:

- a. For corners, control joints, bonding, and other special conditions.
- b. Square-edged units for outside corners.
- c. Textures, patterns and coursing shall be as indicated in drawings.
- d. Color to be natural grey for paint finish per Section 09 91 00 unless otherwise indicated. Fence block units to be natural grey with no paint (clear sealer).

2. Size: Provide concrete masonry units complying with requirements indicated below for size that are manufactured to specified face dimensions within tolerances specified in the applicable referenced ASTM specification for concrete masonry units.

- a. Concrete Masonry Units: Manufactured to specified dimensions of 3/8 inch less than nominal widths by nominal heights by nominal lengths indicated on drawings.
- b. Standard Precision Units: Width x height x length: 8"x8"x16", 8"x8"x8", 8"x4"x16", 8"x4"x8" and other sizes indicated or required including pilaster units, sill blocks, caps and special scored units, as indicated in drawings.

- B. Hollow Load-Bearing Concrete Masonry Units: ASTM C 90, and as follows:

- 1. Unit Compressive Strength: Provide units with minimum average net area compressive strength of 2000 psi to achieve a masonry design strength of 2000 psi, minimum.
- 2. Maximum 0.065% linear shrinkage when tested in accordance with CMA standards. Weight Classification: Light weight or Normal weight. All units of any type or color shall be of the same weight category.
- 4. Comply with CBC Standards and ACI 530.

2.3 MORTAR AND GROUT MATERIALS

- A. Portland Cement: ASTM C 150, Type II low alkali, except Type III may be used for cold-weather construction. Provide natural color or white cement as required to produce required mortar color. Masonry cement will not be permitted. Maintain cement type throughout project.

- B. Ready-Mixed Mortar: Cementitious materials, water, and aggregate complying with requirements specified in this article, combined with set-controlling admixtures to produce a ready-mixed mortar complying with ASTM C 1142.
- C. Hydrated Lime: ASTM C 207, Type S.
- D. Colored Mortar: Use pure mineral oxide mortar color; proportion by weight. Match color of concrete masonry units or as otherwise indicated.
- E. Aggregate for Mortar: ASTM C 144, except for joints less than 1/4 inch use aggregate graded with 100 percent passing the No. 16 sieve.
- F. Grout: Minimum 2,000 psi compressive strength. Aggregate - ASTM C 404.
- G. Water: Clean and potable, free from impurities detrimental to mortar and grout.
- H. Admixtures
 - 1. Only with Architect's approval and not adversely affecting bond or compressive strength.
 - 2. Grout Aid: All grout shall contain Sika "Grout Aid" (GA) as manufactured by Sika Chemical Corp. Mix GA as recommended by manufacturer.
- I. Comply with CBC, Section 2103 for materials applicable to the work.

2.4 REINFORCING STEEL

- A. General: Provide reinforcing steel complying with requirements of referenced unit masonry standard and this article, with size and spacing as indicated in drawings.
- B. Steel Reinforcing Bars: Material and grade as follows:
 - 1. Billet steel complying with ASTM A 615 – Grade 60 deformed bars.
- C. Wire Ties: No. 16 annealed wire for tying reinforcing steel.

2.5 MISCELLANEOUS MASONRY ACCESSORIES

- A. Control Joints:
 - 1. At Walls and Fences: Use joint type as detailed and only where indicated in drawings. Caulking shall match mortar joint color and sheen.
 - 2. At soil retained walls: Where soil occurs use preformed rubber joint material in profiles required or shown, same as Dur-O-Wal Inc.'s "Rapid Control Joint," or approved substitute.
- B. Bond Breaker Strips: Asphalt-saturated organic roofing felt complying with ASTM D 226, Type I (No. 15 asphalt felt).
- C. Refer to the architect's drawings for joint locations.

2.6 MASONRY CLEANERS

- A. Proprietary Acidic Cleaner: Manufacturer's standard-strength, general-purpose cleaner designed for removing mortar/grout stains, efflorescence, and other new construction stains from new masonry surfaces of type indicated below without discoloring or damaging masonry surfaces; expressly approved for intended use by manufacturer of masonry units being cleaned:
 - 1. For masonry not subject to metallic oxidation stains, use formulation consisting of a concentrated blend of surface-acting acids, chelating, and wetting agents.
 - 2. Available Products: Subject to compliance with requirements, a product that may be used to clean unit masonry surfaces includes, but is not limited to, the following:
 - a. "Sure Klean No. 600 Detergent," ProSoCo, Inc.

2.7 MORTAR AND GROUT MIXES

- A. General: Do not add admixtures including coloring pigments, air-entraining agents, accelerators, retarders, water repellent agents, antifreeze compounds, or other admixtures, unless otherwise indicated in the drawings.
 - 1. Do not use calcium chloride in mortar or grout.
- B. Mortar for Unit Masonry: Comply with ASTM C 270, Type S, Proportion Specification, for types of mortar indicated below:
 - 1. Limit cementitious materials in mortar to Portland cement-lime.
 - 2. Comply with CBC, Section 2103.9 and TMS 602, Table SC-1 for mortar mix proportions.
- C. Grout for Unit Masonry: Comply with ASTM C 476 and referenced unit masonry standard.
 - 1. Grout shall be a coarse grout designed to attain a compressive strength of 2000 psi at 28 days.
 - 2. Grout shall be composed of 1 part Portland Cement, not more than 1/10 part hydrated lime fine aggregate at 2 ³/₄ to 3 times the sum of the volumes of the cementitious materials, and pea gravel at 1 to 2 times the sum of the volumes of the cementitious materials, grout aid and sufficient water to attain a slump between 8 and 10 inches without segregation.
 - 3. Materials for grout shall be measured in suitable calibrated devices. After the addition of water, all materials shall be mixed for at least 3 minutes in a drum type batch mixer. Mixing equipment and procedures shall produce grout with the uniformity required for concrete by ASTM C94.

2.8 SOURCE QUALITY CONTROL

- A. Concrete Masonry Unit Tests: For each type, class, and grade of concrete masonry unit indicated, units will be tested by qualified independent testing laboratory for strength, absorption, and moisture content per ASTM C 140, and linear drying shrinkage per ASTM C146.
- B. Refer to section 1.04 D. for other material testing required.
- C. Water used for mixing shall be potable and from one source.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances and other specific conditions, and other conditions affecting performance of unit masonry.
 - 1. For the record, prepare written report, endorsed by Installer, listing conditions detrimental to performance of unit masonry.
- B. Examine rough-in and built-in construction to verify actual locations of piping connections prior to installation and verify compliance with number and locations of conduits within unit cells.
- C. Do not proceed until unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

- A. Comply with referenced unit masonry standard and other requirements indicated applicable to each type of installation included in Project.
- B. Thickness: Build cavity and composite walls and other masonry construction to the full thickness shown. Build single-wythe walls to the actual thickness of the masonry units, using units of nominal thickness indicated.
- C. Build chases and recesses as shown or required to accommodate items specified in this and other Sections of the Specifications. Provide not less than 8 inches of masonry between chase or recess and jamb of openings and between adjacent chases and recesses.
- D. Leave openings for equipment to be installed before completion of masonry. After installation of equipment, complete masonry to match construction immediately adjacent to the opening.
- E. Cut masonry units with motor-driven saws to provide clean, sharp, unchipped edges. Cut units as required to provide continuous pattern and to fit adjoining construction. Use full-size units without cutting where possible.
- F. CONDUITS AND PIPES IN MASONRY WALLS:

1. Conduits, up to $\frac{3}{4}$ " diameter, shall be allowed in cells for vertical runs only, in accordance with the following parameters. No horizontal runs are allowed except that vertical offsets up to 24" in length will be allowed to avoid interference and congestion with reinforcing steel and other embedded items. Water, gas and other pipes may penetrate through a wall in a sleeve, but shall not be embedded in walls.
 2. Reinforced cells: Limit conduit to 1 – $\frac{3}{4}$ " dia. conduit per cell, provided the following conditions are maintained:
 - a. Reinf. Steel shall be properly placed and shall not be relocated to accommodate conduits.
 - b. Grout cover between conduit and reinf. Steel shall be 2.5 x bar dia., $\frac{1}{2}$ " min. (1 $\frac{1}{2}$ " @ #5, 1 $\frac{7}{8}$ " @ #6).
 - c. Maintain a minimum clear area within the cell of 3"x3" for consolidation by vibration.
 3. Unreinforced cells: Limit conduit to 2 – $\frac{3}{4}$ " dia. or 1-1" dia. conduit per cell, provided the following conditions are maintained:
 - a. Conduit shall not be placed closer than 3 dia., center to center, to adjacent conduit.
 - b. Maintain a minimum clear area within the cell of 3"x3" for consolidation by vibration.
 4. No pipes or conduits are allowed in walls less than 8" nominal thickness.
- G. Retaining walls:
1. Masonry retaining walls designed to be tied to floor or roof at top of wall shall be braced prior to the placement of backfill.
 2. Cantilever retaining walls shall not be braced.
 3. Backfill placement shall be performed in proper lifts under soil engineer supervision to avoid developing significant lateral earth pressures.

3.3 CONSTRUCTION TOLERANCES

- A. Comply with construction tolerances of referenced unit masonry standard ACI 530.1-05, Part 3, 3.3G.

3.4 LAYING MASONRY WALLS

- A. Lay out walls in advance for accurate spacing of surface bond patterns with uniform joint widths and for accurate locating of openings, movement-type joints, returns, and offsets. Avoid the use of less-than-half-size units at corners, jambs, and where possible at other locations.
- B. Lay up walls to comply with specified construction tolerances, with courses accurately spaced and coordinated with other construction.

- C. Bond Pattern for Exposed Masonry: Lay exposed masonry in the following bond pattern; do not use units with less than nominal 4-inch horizontal face dimensions at corners or jambs.
 - 1. Running Bond, unless otherwise indicated in drawings.
 - 2. Maximum spacing of reinforcing steel is 32".
- D. Stopping and Resuming Work: In each course, rack back 1/2-unit length for one-half running bond or 1/3-unit length for one-third running bond; do not tooth. Clean exposed surfaces of set masonry, wet clay masonry units lightly (if required), and remove loose masonry units and mortar prior to laying fresh masonry. If work is stopped for one hour or more, stop grout at 1/2" min. and 2" max. below top of units.
- E. Built-In Work: As construction progresses, build-in items specified under this and other Sections of the Specifications. Fill in solidly with masonry around built-in items.
 - 1. Fill space between hollow metal frames and masonry solidly with mortar, unless otherwise indicated.
 - a. At exterior frames insert extruded polystyrene board insulation around perimeter of frame in thickness indicated but not less than 3/4 inch to act as a thermal break between frame and masonry.

3.5 MORTAR BEDDING AND JOINTING

- A. Lay hollow concrete masonry units as follows:
 - 1. Typical Wall Units – All head and bed joints shall be with full mortar coverage on horizontal and vertical face shells for a distance in from the face of the unit not less than the thickness of the shell.
 - 2. Columns, Pilasters and Wall Piers not exceeding 32" in length – All head and bed joints shall be with full mortar coverage. Face-to-face units shall have full mortar coverage over the contact surfaces. Bed webs in mortar in starting course on footings and in all courses of columns, pilasters and piers, and where adjacent to cells or cavities to be filled with grout.
 - 3. Starting Course – At starting course on footings and slabs, spread out full mortar bed including areas under cells. Initial joint shall not be less than 1/4" nor more than 3/4" in thickness. Comply with ACI 530.1, Section 3.3 B.1.
- B. Cut joints flush for masonry walls to be concealed or to be covered by other materials, unless otherwise indicated.

3.6 MOVEMENT (CONTROL AND EXPANSION) JOINTS

- A. General: Install control and expansion joints in unit masonry only where indicated or based on industry standards, not to exceed 16 ft. spacing. Build in related items as the masonry progresses. Do not form a continuous span through movement joints unless provisions are made to prevent in-plane restraint of wall or partition movement.

- B. Form control joints in concrete masonry as follows:
 - 1. Install preformed control joint gaskets designed to fit standard sash block.

3.7 *INSTALLATION OF REINFORCED UNIT MASONRY*

- A. General: Install reinforced unit masonry to comply with requirements of referenced unit masonry standard.
- B. Temporary Formwork: Construct formwork and shores to support reinforced masonry elements during construction.
 - 1. Construct formwork to conform to shape, line, and dimensions shown. Make sufficiently tight to prevent leakage of mortar and grout. Brace, tie, and support forms to maintain position and shape during construction and curing of reinforced masonry.
- C. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist grout pressure.
 - 1. Grout lifts shall not exceed 5'-4". Comply with TMS 602, 3.5D.1.c.
 - 2. Where grout pours exceed 5'-4" cleanouts are required unless waived by the building inspector when cells are able to be inspected and cleaned to the bottom of the pour.
- D. Cleanouts: Clean-out openings shall be provided for by one of the following methods.
 - 1. Provide cleanouts in each cell at the bottom of each pour by removing the face shell unless bottom course is constructed per item 2.
 - 2. If the bottom course of each pour is constructed of inverted, open-end bond-beam units then cleanouts are only required at each reinforced cell by removing the face shell.
 - 3. Where Cleanouts are located below concrete slabs or in locations where the wall surface is not visible, Cleanout openings may be tightly form plugged. Where Cleanouts are located in areas where the wall surface is visible, cleanouts shall be plugged with face shells to match the units.
 - 4. Cleanouts shall be scaled before grouting, after inspection.
- E. Do not remove forms and shores until reinforced masonry members have cured sufficiently to carry their own weight and other temporary loads that may be placed on them during construction. Without testing to verify 2/3 strength has been achieved, forms and shores shall not be removed for a minimum of 7 days after grout pour.

3.8 *FIELD QUALITY CONTROL*

- A. Testing Frequency: Tests and evaluations listed in this article will be performed during construction for each 5000 sq. ft. of wall area or portion thereof.

1. Mortar composition and properties – evaluate per ASTM C 780.
2. Grout compressive strength - sample and test per ASTM C 1019.
- B. Verification of Masonry Strength: Verify masonry strength, f'm, by one of the following methods as outlined in CBC, Section 2105.2, .3 and .4:
 1. Unit Strength Method: Mortar and grout testing per CBC, Section 2105.3.
 2. Masonry Core Testing: CBC, Section 2105.4.
- C. All structural masonry work shall be continuously inspected during laying, reinforcing placement and grouting by an inspector specially approved for that purpose by the architect and Owner.
 1. Comply with TMS 602, Table 4 – Level 2 Quality Assurance for minimum testing and inspection required.

3.9 *REPAIRING, POINTING, AND CLEANING*

- A. Remove and replace masonry units that are loose, chipped, broken, stained, or otherwise damaged or if units do not match adjoining units. Install new units to match adjoining units and in fresh mortar or grout, pointed to eliminate evidence of replacement.
- B. Pointing: During the tooling of joints, enlarge any voids or holes, except weep holes, and completely fill with mortar. Point-up all joints including corners, openings, and adjacent construction to provide a neat, uniform appearance, prepared for application of sealants.
- C. Final Cleaning: After mortar is thoroughly set and cured, clean exposed masonry as follows:
 1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
 2. Test cleaning methods on sample wall panel; leave 1/2 panel uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of masonry.
 3. Protect adjacent stone and non-masonry surfaces from contact with cleaner by covering them with liquid strippable masking agent, polyethylene film, or waterproof masking tape.
 4. Wet wall surfaces with water prior to application of cleaners; remove cleaners promptly by rinsing thoroughly with clear water.
 5. Clean brick by means of bucket and brush hand-cleaning method described in BIA "Technical Note No. 20 Revised" using the following masonry cleaner:
 - a. Proprietary acidic cleaner; apply in compliance with directions of acidic cleaner manufacturer.

6. Clean concrete masonry by means of cleaning method indicated in NCMA TEK 45 applicable to type of stain present on exposed surfaces.
- D. Finish Application: Finishes where indicated shall be applied in accordance with and by the applicable specification and trade.
- E. Protection: Provide final protection and maintain conditions in a manner acceptable to Installer that ensures unit masonry is without damage and deterioration at time of Substantial Completion.

END OF SECTION

SECTION 05 12 00

STRUCTURAL STEEL FRAMING

PART 1 GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes fabrication and erection of structural steel work, as shown on drawings including schedules, notes, and details showing size and location of members, typical connections, and types of steel required.
- B. Related Sections: The following Sections contain requirements that relate to this Section:
 - 1. Structural steel is that work defined in American Institute of Steel Construction (AISC) "Code of Standard Practice" and as otherwise shown on drawings.
 - 2. Division 5 Section "Metal Fabrications" for loose steel bearing plates and miscellaneous steel framing.
 - 3. Refer to Division 3 for anchor bolt installation in concrete.

1.3 SUBMITTALS

- A. General: Submit each item in this Article according to the Conditions of the Contract and Division 1 Specification Sections.
- B. Product Data or manufacturer's specifications and installation instructions for following products. Include laboratory test reports and other data to show compliance with specifications (including specified standards).
 - 1. Structural steel (each type), including certified copies of mill reports covering chemical and physical properties.
 - 2. Structural steel primer paint.
 - 3. Shrinkage-resistant grout.
- C. Shop Drawings, including complete details and schedules for fabrication and assembly of structural steel members, procedures, and diagrams.

1. Fabricator and detailer shall be responsible for coordination of all contract documents for required steel work. Comply with AISC – Code of Standard Practice for Steel buildings and Bridges, Section 4.
 2. Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld.
 3. Provide setting drawings, templates, and directions for installation of anchor bolts and other anchorages to be installed as work of other sections.
 4. Where drawings are in conflict, detailing shall not be completed for affected items until the detailer has requested clarification/revision from the Architect and has received written directive for such change as may be required. Request for clarification/revision shall be by RFI or by clouded comment on the initial shop drawing submittal. Fabricator shall be responsible for changes to the shop drawings required where shop drawings have progressed prior to resolution of discrepancies.
 5. Detailing shall allow for minor coordination changes and revisions as a part of the contract services.
- D. Inspection reports conducted on shop and field High-Strength 'Slip Critical' bolted and welded connections: Include data on type(s) of tests conducted and test results.

1.4 QUALITY ASSURANCE

- A. Shop Drawings: Fabricator shop drawings shall be submitted in compliance with Division 01, Section 01 33 00, Submittal Procedures.
1. Comply with AISC Code of Standard Practice for Steel Buildings and Bridges, Section 4.
 2. Use of CAD files and/or copies of design drawings: Comply with AISC Code of Standard Practice, Section 4.3.
- B. Codes and Standards: Comply with provisions of following, except as otherwise indicated:
1. American Institute of Steel Construction (AISC) "Code of Standard Practice for Steel Buildings and Bridges."
 - a. In conformance with paragraph 3.2, the structural drawings identify the steel required for support of architectural, mechanical and electrical equipment. Contractor shall refer to the architectural, mechanical and electrical drawings for detail configurations and other construction information.
 - b. Paragraph 4.3 (a) of the above code is hereby modified per Section 1.04 A.2.

2. AISC "Specifications for Structural Steel Buildings," including "Commentary."
 3. "Specifications for Structural Joints using ASTM A 325 or A 490 Bolts" approved by the Research Council on Structural Connections.
 4. American Welding Society (AWS) D1.1 and D1.8 "Structural Welding Code - Steel."
 5. ASTM A 6 "General Requirements for Delivery of Rolled Steel Plates, Shapes, Sheet Piling and Bars for Structural Use."
 6. California Building Code (CBC), 2022 edition, Chapter 22.
- C. Installer Qualifications: Steel work installers shall meet one or more of the following:
1. A qualified installer who participates in the AISC Quality Certification Program and is designated an AISC-Certified Erector with more than 5 years experience with similar work.
 2. A steel work installer with a minimum of 5 years experience who has successfully completed three (3) projects of similar scope and size to that specified for this project.
- D. Fabricator Qualifications: Steel Fabricator shall meet one or more of the following. 'Fabricator' shall mean the owner/operator of the fabrication business having active participation/supervision in the project fabrication:
1. A qualified 'Fabricator' who participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant.
 2. A 'Fabricator' who has a minimum of 5 years experience who has successfully completed at least three (3) projects of similar scope and size to that specified for this project in the past 5 years.
- E. Qualifications for Welding Work: Qualify welding procedures and welding operators in accordance with AWS "Qualification" requirements.
1. Provide certification that welders to be employed in work have satisfactorily passed AWS qualification tests within previous 12 months for the types of welding to be performed.
 2. If recertification of welders is required, retesting will be the Contractor's responsibility.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in such quantities and at such times to ensure uninterrupted progress of Work.

- B. Deliver anchor bolts and anchorage devices, which are to be embedded in cast-in-place concrete or masonry, in ample time to not delay Work.
- C. Store materials to permit easy access for inspection and identification. Keep steel members off ground by using pallets, platforms, or other supports. Protect steel members and packaged materials from erosion and deterioration.
 - 1. Clean and relubricate bolts and nuts that become dry or rusty before use.
 - 2. Do not store materials on structure in a manner that might cause distortion or damage to members or supporting structures. Repair or replace damaged materials or structures as directed.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Metal Surfaces, General: For fabrication of work that will be exposed to view, use only materials that are smooth and free of surface blemishes including the following:
 - 1. Pitting.
 - 2. Rust and scale.
 - 3. Seam marks.
 - 4. Roller marks.
 - 5. Rolled trade names.
 - 6. Roughness.
- B. Remove blemishes by grinding or by welding and grinding prior to cleaning, treating, and applying surface finishes.
- C. Structural Steel W, S and M shapes: ASTM A992, Grade 50.
- D. Structural Steel C and MC shapes, Angles, miscellaneous Plates and Bars: ASTM A36.
- E. Square Cold-Formed Structural Steel Tubing (HSS): ASTM A500, Grade C.
- F. Unheaded Anchor Bolts and Nuts: ASTM A 307, Grade C or ASTM F 1554, Grade 36; unheaded, unless otherwise indicated. Unheaded bolts (J-bolts) are acceptable for use in bolting sill plates to concrete slabs only. Use headed bolts where embedded in the sides of masonry units or embedded into concrete for other than sill bolting applications.
- G. Headed Anchor Bolts and Nuts: ASTM A 307, Grade A or ASTM F 1554, Grade 36 headed, unless otherwise indicated.

- H. Unfinished Threaded Fasteners and Nuts: ASTM A307 or ASTM F1554, Grade 36; regular low carbon-steel bolts; and carbon-steel nuts.
 - 1. Provide hex head bolts and hex nuts.
- I. Welding Electrodes: Comply with AWS Code; ASTM 233, E-70 Series.
- J. Structural Steel Primer Paint: Series L69, Hi Build Epoxoline II, Red color Low VOC epoxy, air dried, by Tnemec or equal as approved in accordance with Div 01 for Substitutions. Manufacturer's standard primer for unpainted steel permanently enclosed in walls and above ceilings.
- K. Cement Grout: Portland cement (ASTM C 150, Type II or Type III) and clean, uniformly graded natural sand (ASTM C 404, Size No. 2). Mix at a ratio of 1.0 part cement to 3.0 parts sand, by volume, with minimum water required for placement and hydration.
- L. Nonmetallic Shrinkage-Resistant Grout: Premixed, nonmetallic, noncorrosive, nonstaining product containing selected silica sands, Portland cement, shrinkage compensating agents, plasticizing and water-reducing agents, complying with CE-CRD-C621. Minimum 5,000 psi in 7 days.
 - 1. Available Products: Subject to compliance with requirements, products that may be incorporated in the work include, but are not limited to, the following:
 - a. SonogROUT; Sonneborn/Contect.
 - b. Euco N.S.; Euclid Chemical Co.
 - c. Sealtight 588 Grout; W. R. Meadows.

2.2 FABRICATION

- A. Fabricate and assemble structural steel in shop to greatest extent possible. Fabricate structural steel according to AISC specifications on final Shop Drawings.
 - 1. Properly mark and match-mark materials for field assembly.
 - 2. Fabricate for delivery a sequence that will expedite erection and minimize field handling for materials.
 - 3. Where finishing is required, complete assembly, including welding of units, before start of finishing operations. Provide finish surfaces of members exposed in final structure free of markings, burrs, and other defects.
- B. Connections: Weld or bolt shop connections, as indicated.
- C. Bolt field connections, except where welded connections or other connections are indicated.
 - 1. Provide unfinished threaded fasteners for other connections primary and of secondary framing members to primary members (including girders, beams,

purlins, girts, bracings and other framing members used) and for temporary bracing to facilitate erection.

- D. Welded Construction: Comply with AWS Code for procedures, appearance and quality of welds, and methods used in correcting welding work.
- E. Assemble and weld built-up sections by methods that will produce true alignment of axes without warp.
- F. Holes for Other Work: Provide holes required for securing other work to structural steel framing and for passage of other work through steel framing members, as shown on final Shop Drawings.
 - 1. Cut, drill, or punch holes perpendicular to metal surfaces. Do not flame-cut holes or enlarge holes by burning. Drill holes in bearing plates.
 - 2. Weld threaded nuts to framing and other specialty items as indicated to receive other work.
 - 3. Provide unfinished threaded fasteners for other primary connections and for secondary framing members to primary members and for temporary bracings to facilitate erection.
- G. Camber: Cambering of steel is not specified for this Work.

2.3 SHOP PAINTING

- A. Surface Preparation: After inspection and before shipping, clean steelwork to be painted. Remove loose rust, loose mill scale, and spatter, slag, or flux deposits. Clean steel in accordance with Steel Structures Painting Council (SSPC) as follows:
 - 1. SP-1 "Solvent Cleaning."
 - 2. SP-2 "Hand-Tool Cleaning."
 - 3. SP-3 "Power-Tool cleaning."
- B. Painting: Immediately after surface preparation, apply structural steel primer paint in accordance with manufacturer's instructions and at a rate to provide dry film thickness of not less than 1.5 mils. Use painting methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 - 1. Do not prime steel scheduled to receive spray-applied fireproofing.
 - 2. Do not prime steel to be embedded in concrete.

2.4 SOURCE QUALITY CONTROL

- A. General: Materials and fabrication procedures are subject to inspection and tests in mill, shop, and field, conducted by a qualified inspection agency.

1. Inspections and tests will not relieve Contractor of responsibility for providing materials and fabrication procedures in compliance with specified requirements.
 2. Promptly remove and replace materials or fabricated components that do not comply.
- B. Design of Members and Connections: Steel supplier, fabricator or erector shall not design any portion of the steel structural components used. Details shown on the drawings are typical; similar details apply to similar conditions, unless otherwise indicated. Where information is not provided to complete the construction, contractor shall inform architect. Work shall not continue on affected components until written directive has been submitted.
1. Verify dimensions at site whenever possible without causing delay in the work.
 2. Promptly notify Architect whenever design of members and connections for any portion of structure are not clearly indicated.

PART 3 EXECUTION

3.1 ERECTION

- A. Temporary Shoring and Bracing: Provide temporary shoring and bracing members with connections of sufficient strength to bear imposed loads.
1. Remove temporary members and connections when permanent members are in place and final connections are made.
 2. Provide temporary guide lines to achieve proper alignment of structures as erection proceeds.
- B. Temporary Planking: Provide temporary planking and working platforms as necessary to effectively complete work; see Section 01500.
- C. Setting Bases and Bearing Plates: Clean concrete and masonry bearing surfaces of bond-reducing materials and roughen to improve bond to surfaces. Clean bottom surface of base and bearing plates.
1. Set loose and attached base plates and bearing plates for structural members on wedges or other adjusting devices.
 2. Tighten anchor bolts after supported members have been positioned and plumbed. Do not remove wedges or shims, but if protruding, cut off flush with edge of base or bearing plate prior to packing with grout.
 3. Pack grout solidly between bearing surfaces and bases or plates to ensure that no voids remain. Finish exposed surfaces, protect installed materials, and allow to cure.

4. For proprietary grout materials, comply with manufacturer's instructions.
- D. Field Assembly: Set structural frames accurately to lines and elevations indicated. Align and adjust various members forming part of complete frame or structure before permanently fastening. Clean bearing surfaces and other surfaces that will be in permanent contact before assembly. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.
- E. Level and plumb individual members of structure within specified AISC tolerances.
- F. Establish required leveling and plumbing measurements on mean operating temperature of structure. Make allowances for difference between temperature at time of erection and mean temperature at which structure will be when completed and in service.
- G. Splice members only where indicated and accepted on Shop Drawings.
- H. Erection Bolts: On exposed welded construction, remove erection bolts, fill holes with plug welds, and grind smooth at exposed surfaces.
 1. Comply with AISC specifications for bearing, adequacy of temporary connections, alignment, and removal of paint on surfaces adjacent to field welds.
 2. Do not enlarge unfair holes in members by burning or by using drift pins, except in secondary bracing members. Ream holes that must be enlarged to admit bolts.
- I. Gas Cutting: Do not use gas cutting torches in field for correcting fabrication errors in primary structural framing. Cutting will be permitted only on secondary members that are not under stress, as acceptable to Architect. Finish gas-cut sections equal to a sheared appearance when permitted.
- J. Touch-Up Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas of shop paint. Apply paint to exposed areas using same material as used for shop painting.

3.2 QUALITY CONTROL

- A. Owner will engage an independent testing and inspecting agency to inspect high-strength bolted connections and welded connections and to prepare test reports.
 1. Testing agency will conduct and interpret tests and state in each report whether tested Work complies with or deviates from requirements.
- B. Provide access for testing agency to places where structural steel work is being fabricated or produced so that required inspection and testing can be accomplished.
- C. Testing agency may inspect structural steel at plant before shipment.

- D. Correct deficiencies in or remove and replace structural steel that does not comply with specified requirements.
- E. Additional testing, at Contractor's expense, will be performed to determine compliance of corrected Work with specified requirements.

END OF SECTION

SECTION 05 40 00

COLD-FORMED METAL FRAMING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Fabrications and installations of types of cold-formed metal framing units include the following:
 - 1. C-shaped load-bearing and non-load-bearing, punched and un-punched channel studs and joists with stiffened flanges.
 - 2. C-shaped load-bearing and non-load-bearing steel stud track.
 - 3. C-shaped un-punched blockings, headers and miscellaneous components.
 - 4. Lt.-gauge straps, z-shaped and "hat" shaped furring.

1.2 REFERENCES

- A. CBC 2022 - California Building Code
- B. SSMA - Steel Stud Manufacturers Association

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
 - 1. Product data and installation instructions for each item of cold-formed metal framing and accessories.
 - 2. Shop drawings for special components and installations not fully dimensioned or detailed in manufacturer's product data.
 - a. Include placing drawings for framing members showing size and gage designations, number, type, location, and spacing. Indicate supplemental strapping, bracing, splices, bridging, accessories, and details required for proper installation.
 - 3. 2 foot long sample of each stud, joist and track component to be used. Mark each sample to indicate symbol of identification from structural drawings.

1.4 QUALITY ASSURANCE

- A. Component Design: Calculate structural properties of studs and joists in accordance with American Iron and Steel Institute (AISI) "Specification for Design of Cold-Formed Steel Structural Members."

- B. All component section properties shall comply with the Steel Stud Manufacturer's Association (SSMA). Refer to structural drawings for minimum section properties for each component used.
- C. Fire-Rated Assemblies: Where framing units are components of assemblies indicated for a fire-resistance rating, including those required for compliance with governing regulations, provide units that have been approved by governing authorities that have jurisdiction.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, Manufacturer shall be a member of the Steel Stud Manufacturer's Association (SSMA).

2.2 METAL FRAMING

- A. System Components: Manufacturer's components shall comply with the section properties of the SSMA. Manufacturers' standard load-bearing steel studs and joists of type, size, shape, and gauge as indicated. With each type of metal framing required, provide manufacturer's standard, steel runners (tracks), blocking, lintels, clip angles, shoes, reinforcements, fasteners, and accessories for applications indicated, as needed to provide a complete metal framing system. All framing components shall be of the gauge indicated on the structural drawings, minimum 20 gauge steel, except as otherwise indicated.
- B. Materials and Finishes:
 - 1. Bearing and non-bearing studs may be punched sections, unless specified otherwise. Comply with structural drawings for limitations on punch-out locations from ends of studs.
 - 2. All joists and rafters shall be un-punched sections. Holes required for access of conduit and piping shall be drilled to a size of minimum requirement for installation.
 - 3. For 16-gauge and heavier units, fabricate metal framing components of structural quality steel sheet with a minimum yield point of 50,000 psi; ASTM A 653, A 570, or A 611.
 - 4. For 18-gauge and lighter units, fabricate metal framing components of commercial quality steel sheet with a minimum yield point of 33,000 psi; ASTM A 653, A 570, or A 611.
 - 5. Provide galvanized finish to metal framing components complying with ASTM A 525 for minimum G 60 coating. Fasteners: Provide nuts, bolts, washers, screws, and other fasteners with corrosion-resistant plated finish.

7. Galvanizing Repair: Where galvanized surfaces are damaged, prepare surfaces and repair in accordance with procedures specified in ASTM A 780.

2.3 *FABRICATION*

- A. General: Framing components may be prefabricated into assemblies before erection. Fabricate panels plumb, square, true to line, and braced against racking with joints welded. Perform lifting of prefabricated units to prevent damage or distortion.
- B. Fabricate units in jig templates to hold members in proper alignment and position and to assure consistent component placement.
- C. Fastenings: Attach similar components by screw fasteners. Attach dissimilar components by bolting, or screw fasteners, as standard with manufacturer.
- D. Wire tying of framing components is not permitted.
- E. Welding of framing components is not permitted.
- F. Fabrication Tolerances: Fabricate units to a maximum allowable tolerance variation from plumb, level, and true to line of 1/8 inch in 10 feet.

PART 3 EXECUTION

3.1 *EXAMINATION*

- A. Examine supporting substrates and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance. Proceed with installation only after unsatisfactory conditions have been corrected.
- B. Bent, distorted or otherwise damaged components shall not be used.

3.2 *INSTALLATION*

- A. General: Install metal framing systems in accordance with manufacturer's printed or written instructions and recommendations.
- B. Runner Tracks: Install continuous tracks sized to match studs. Align tracks accurately to layout at base and tops of studs. Secure tracks as specified on the structural drawings. Do not exceed 24 inches o.c. spacing for power-driven fasteners or 16 inches o.c. for other types of attachment. Provide fasteners at corners and ends of tracks.
- C. Installation of Wall Studs: Secure studs to top and bottom runner tracks by screw fastening at both inside and outside flanges.

- D. Set studs plumb, except as needed for diagonal bracing or required for non-plumb walls or warped surfaces and similar requirements.
- E. Where stud system abuts structural columns or walls, including masonry walls, anchor end studs to stiffeners in supporting structure.
- F. Install supplementary framing, blocking, and bracing in metal framing system wherever walls or partitions are indicated to support fixtures, equipment, services, casework, heavy trim and furnishings, and similar work requiring attachment to the wall or partition. Where type of supplementary support is not otherwise indicated, comply with manufacturer's recommendations and industry standards in each case, considering weight or loading resulting from item supported.
- G. Frame wall openings per structural drawings. Where details for openings are not provided, frame non-bearing wall openings smaller than 4 feet span with double 4" stud section header, single jamb stud, single king stud and single sill track. Frame openings larger than 4 feet span, but not exceeding 8 feet span, with double 6" stud section header, double jamb studs, double king studs and single sill track. All structural bearing wall openings and non-bearing openings larger than 8 foot span require special details, see structural drawings.
- H. Frame both sides of expansion and control joints with separate studs; do not bridge the joint with components of stud system.
- I. Install horizontal strap and block stiffeners in stud system where finish material is not installed to both sides, and where strap and block stiffeners are needed to maintain straightness of long studs. Space at not more than 96 inches o.c. vertically. See structural drawings for requirements.
- J. Erection Tolerances: Bolt wall panels (at both horizontal and vertical junctures) to produce flush, even, true-to-line joints.
 - 1. Maximum variation in plane and true position between prefabricated assemblies should not exceed 1/16 inch.
- K. Installation of Joists: Install level, straight, and plumb, complete with bracing and reinforcing as indicated on drawings. Provide not less than 1-1/2-inch end bearing.
 - 1. Drilled holes in un-punched joists shall be limited to a diameter of 1/3 joist depth and located within 1/3 joist depth within the center 1/3 joist span, unless otherwise approved by the engineer.
- L. Reinforce ends with end clips, steel hangers, steel angle clips, steel stud section, or as otherwise recommended by joist manufacturer.
- M. Where required, reinforce joists at interior supports with single short length of joist section located directly over interior support.
- N. Secure joists to interior support systems to prevent lateral movement of bottom flange.

- O. Field Painting: Touch-up damaged shop-applied protective coatings. Use galvanizing repair system for galvanized surfaces.

3.3 *REPAIRS AND PROTECTION*

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed metal framing with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Touchup Painting: Wire brush, clean, and paint scarred areas, welds, and rust spots on fabricated and installed prime-painted, cold-formed metal framing. Paint framing surfaces with same type of shop paint used on adjacent surfaces.
- C. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and installer that ensure cold-formed metal framing is without damage or deterioration at time of Substantial Completion.

END OF SECTION

SECTION 05 50 00

METAL FABRICATIONS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Shop fabricated miscellaneous ferrous metal items, galvanized and prime painted, not included in Section 05 12 00, Structural Steel Framing. Items include, but are not limited to, brackets, lintels, ladders, architectural features and similar items as indicated.
- B. Stainless steel metal items such as fascias, shade louvers, countertops and railings, not included in Section 05 12 00, Structural Steel Framing.
- C. Related Sections:
 - 1. Section 05 12 00, Structural Steel Framing

1.2 REFERENCES

- A. American Society of Mechanical Engineers (ASME)
 - 1. ASME B18 Fasteners
- B. American Society for Testing and Materials (ASTM)
 - 1. ASTM A36/A36M Carbon Structural Steel
 - 2. ASTM A48/A48M Gray Iron Castings
 - 3. ASTM A53 Pipe, Steel, Black and Hot-Dipped, Zinc-coated Welded and Seamless
 - 4. ASTM A123 Zinc (Hot-Dip Galvanized) on Coatings on Iron and Steel Products
 - 5. ASTM A153 Zinc Coating (Hot-Dip) on Iron and Steel Hardware
 - 6. ASTM A276 Stainless Steel Bars and Shapes
 - 7. ASTM A283/A 283M Low and Intermediate Tensile Strength Carbon Steel Plates
 - 8. ASTM A307 - Carbon Steel Bolts and Studs, 60,000 psi Tensile Strength
 - 9. ASTM A500 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Round and Shapes
 - 10. ASTM A513 - Electric-Resistance-Welded Carbon and Alloy Steel Mechanical Tubing

11. ASTM A563 - Carbon and Alloy Steel Nuts
 12. ASTM A653/A 653M Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
 13. ASTM A666 Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar (nonmagnetic).
 14. ASTM D520 - Standard Specification for Zinc Dust Pigment.
 15. ASTM A780 - Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings.
 16. ASTM C1107 - Packaged Dry Hydraulic – Cement Grout (Non-Shrink)
 17. ASTM F594 Stainless Steel Nuts
 18. ASTM F1554 - Anchor Bolts, Steel, 36, 55, and 105-ksi Yield Strength
- C. American Welding Society (AWS)
1. AWS A2.4 - Standard Symbols for Welding, Brazing and Non Destructive Examination
 2. AWS A5.1 - Carbon Steel Covered Arc-Welding Electrodes
- D. California Code of Regulations (CCR)
1. Title 8, Chapter 3.2
 2. Title 8, Division 1, Subchapter 7, Group 1, Article 4, Section 3277, Fixed Ladders
 3. Cal/OSHA, Subchapter 4 Construction Safety Orders
 4. 2022 California Building Code (CBC), Chapter 22.
 5. Title 12, California Fire Code Chapter 26 Welding and Other Hot Work.
- E. Steel Structures Painting Council (SSPC)
1. SSPC SP-2 - Steel Preparation

1.3 SUBMITTALS

- A. General: Submit each item in this Article according to the Conditions of the Contract and Division 1 Specification Sections.
- B. Product Data or manufacturer's specifications and installation instructions for following products. Include laboratory test reports and other data to show compliance with specifications (including specified standards).

1. Structural steel (each type), including certified copies of mill reports covering chemical and physical properties.
 2. Structural steel primer paint.
 3. Shrinkage-resistant grout.
- C. Shop Drawings, including complete details and schedules for fabrication and assembly of structural steel members, procedures, and diagrams.
1. Fabricator and detailer shall be responsible for coordination of all contract documents for required steel work. Comply with AISC – Code of Standard Practice for Steel buildings and Bridges, Section 4.
 2. Indicate welds by standard AWS symbols, indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners and accessories distinguishing between shop and field welds, and show size, length, and type of each weld. Include erection drawings, elevations and details where applicable. Indicate welded connections using standard AWS A2.4 Welding Symbols. Indicate net weld lengths.
 3. Provide setting drawings, templates, and directions for installation of anchor bolts and other anchorages to be installed as work of other sections.
 4. Where drawings are in conflict, detailing shall not be completed for affected items until the detailer has requested clarification/revision from the Architect and has received written directive for such change as may be required. Request for clarification/revision shall be by RFI or by clouded comment on the initial shop drawing submittal. Fabricator shall be responsible for changes to the shop drawings required where shop drawings have progressed prior to resolution of discrepancies.
 5. Detailing shall allow for minor coordination changes and revisions as a part of the contract services.
- D. Welder Certifications (in accordance with AWS qualification requirements):
- E. Manufacturer's Certificates certifying welders employed on the work have been AWS qualified within the previous 12 months, in accordance with AWS-WHB-1.
- F. Written Welding Procedure Specification (WPS)
- G. Inspection reports conducted on shop and field High-Strength 'Slip Critical' bolted and welded connections: Include data on type(s) of tests conducted and test results.

1.4 QUALITY ASSURANCE

- A. Welding: Qualify procedures and personnel according to the following
1. AWS D1.1, Structural Welding Code--Steel.
 2. AWS D1.3, Structural Welding Code--Sheet Steel.

- 3. AWS Certified welders.
- 4. AWS D1.6, Structural Welding Code--Stainless Steel.
- B. Coating applicator - Galvanized Metal Fabrications: Company specializing in hot-dip galvanizing after fabrication and following the procedures in the *Quality Assurance Manual* of the American Galvanizers Association.

1.5 FIELD MEASUREMENTS

- A. Verify field measurements prior to submittal of shop drawings and fabrication.

PART 2 PRODUCTS

2.1 METALS, GENERAL

- A. Metal Surfaces, General: Provide materials with smooth, flat surfaces, unless otherwise indicated. For metal fabrications exposed to view in completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.

2.2 FERROUS METALS

- A. Steel Sections: ASTM A992 for W-Shape sections and ASTM A36 for all other members.
- B. Steel Plates, Shapes, and Bars: ASTM A36/A36M.
- C. Bending or cold-formed steel ASTM A283, Grade C.
- D. Stainless-Steel Sheet, Strip, Plate, and Flat Bars ASTM A240, Type 304, Type 304L, Commercial Grade No. 4 finish, 16 gauge minimum, unless otherwise indicated. Stretcher-leveled standard of flatness for countertops.
- E. Stainless-Steel Bars and Shapes ASTM A276, Type 304L.
- F. Steel Round Structural Tubing ASTM A500, Grade B.
- G. Pipe ASTM A53, Grade B, Type E or S, Schedule 40, galvanized where indicated.
- H. Cast Iron ASTM A48/A48M, Class 30, unless another class is indicated or required by structural loads.
- I. Square and rectangular steel tubing structural, carbon steel conforming to ASTM A500.
- J. Mechanical Tubing: ASTM A 513 hot- or cold-rolled carbon steel for non-structural tubing, electric welded tubing.

2.3 FASTENERS

- A. General: Provide Type 304 or 316 stainless-steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B 633, Class Fe/Zn 5, where built into exterior walls. Select fasteners for type, grade, and class required.
- B. Bolts and Nuts: Regular hexagon-head bolts, ASTM A307, Grade A; with hex nuts, ASTM A563 and ANSI B18.2.1; and, where indicated, flat washers and ASTM A325 as indicated on drawings.
- C. Stainless-Steel Bolts and Nuts: Regular hexagon-head annealed stainless steel bolts, nuts and, where indicated, flat washers; ASTM F593/(ASTM F738M) for bolts and ASTM F594/F836M) for nuts, Alloy Group (A1) (A4).
 - 1. Stainless Steel Fastenings and Fittings at Food Preparation areas
 - a. Bolts and screws with countersunk flat heads at interior and exterior visible or accessible surfaces.
 - b. Use concealed fastenings where possible.
- D. Anchor Bolts ASTM F1554, Grade 36.
- E. Machine Screws ASME B18.6.3.
- F. Lag Bolts ASME B18.2.1.
- G. Wood Screws Flat head, carbon steel, ASME B18.6.1.
- H. Plain Washers Round, carbon steel, ASME B18.22.1.
- I. Lock Washers Helical, spring type, carbon steel, ASME B18.21.1.
- J. Threaded rods, steel yokes and plates – ASTM A36.
- K. Self-drilling, self-tapping screws, ASTM C954, galvanized, minimum #10 unless noted otherwise on drawings. By Buildex/Tomarco or equal.
- L. Anchorage Devices, Drilled Expansion Anchors Minimum 5/8-inch diameter with 3 inch embedment unless noted otherwise on drawings. Allowable shear and tension values as permitted in ICC-ES, ESR-1917 Hilti Kwik Bolt TZ Concrete Anchor or Hilti Kwik Bolt 3, ESR-1385 for masonry anchors, by Hilti Inc., Tulsa, OK.

2.4 MISCELLANEOUS MATERIALS

- A. Shop Primer Fabricator's rust inhibitive primer suitable for finish scheduled in Section 09 91 00.
- B. Galvanizing Repair Compound for metal to be painted: ASTM D520 Type III, "ultra pure" high purity grade. Touch-Up products for Galvanized Surfaces Ready Mixed Zinc rich galvanizing compound, 95% zinc.

1. Finish: ZRC Products Company, Marshfield, MA or equal. Primer for repaired galvanized to receive a painting finish.
- C. Zinc-Based Solders/Alloys for exposed galvanized finish: Solder Zinc Alloy for Repair ASTM A780 Annex A1; Welco Gal-Viz self-fluxing solder alloy, Galvalloy, Galvabar or equal, ASTM A780, paragraph A1. Repair Using Zinc-Based Alloys.
- D. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.
 1. Welding Materials: AWS A5.1, E70XX for Grade 40, E90XX for Grade 60, type and procedures required by electrode manufacturer for materials being welded.
- E. Grout ASTM C1107, Non-shrink type, pre-mixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing additives, capable of developing a minimum compressive strength of 8,000 psi at 7 days; of consistency suitable for application and a 30 minute working time.

2.5 *FABRICATION*

- A. Fit and shop assemble in largest practical sections for delivery to site.
- B. Ease exposed edges to small uniform radius.
- C. Fabricate items with joints tightly fitted and secured.
- D. Welded Joints. Seal joined members by continuous welds. Dress welded joints, leaving no burrs, or sharp or abrasive corners, edges or surfaces.
 1. Where exposed to view in finished, interior and exterior habitable spaces, dress welds in accordance with NOMMA Guidelines for Finish 1.
 2. Where exposed to view in utility type spaces and roof tops, dress welds in accordance with NOMMA Guidelines for Finish 2.
 3. Where concealed, dress welds in accordance with NOMMA Guidelines for Finish 3.
- E. Exposed Mechanically Fastened Joints. Make exposed, mechanically fastened joints hairline-tight, flush, butt joints. Secure with flush-mount, countersunk, screws or bolts; unobtrusively located; consistent with design of component, except where specifically indicated otherwise.
- F. Provide components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as related metal fabrication, unless expressly indicated otherwise.

2.6 *FINISHES*

- A. Steel and Iron

1. Clean surfaces of rust, scale, grease and foreign matter prior to finishing. Prepare in accordance with SSPC SP-2. Dress all welds.
 2. Galvanize steel items indicated to zinc coating thickness in accordance with ASTM A123, minimum Coating Grade 80 (1.9 oz/sq. ft.). Surfaces shall be free of icicles, spangles and puddling. Provide venting holes at all enclosed sections, "V" notch, and drilled holes are acceptable. Locate to prevent rain-water from entering enclosed sections at exterior galvanized items. For sheet steel items, galvanize per ASTM A653 G60 Coating Designation.
 3. Galvanized items to be painted: Do not use quenching solutions or treatments immediately after galvanizing. Refer to individual sections for galvanized items to be painted and to Section 09 91 00.
 4. Do not prime surfaces in direct contact with concrete or where field welding is required.
 5. For painted surfaces, prime items with two coats in accordance with requirements of primer specified herein and as required to prevent steel items exposed to elements from rusting prior to application of finishes.
- B. Stainless Steel Finishes
1. Remove tool and die marks and stretch lines or blend into finish.
 2. Grind and polish surfaces to produce uniform, directionally textured, polished finish indicated, free of cross scratches. Run grain with long dimension of individual pieces, except adjacent lapped or abutted pieces that form a larger panel shall have the grain running in the same direction as directed by Architect.
 3. Bright, Directional Satin Finish No. 4.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.
- B. Beginning of installation means erector accepts existing conditions.

3.2 PREPARATION

- A. Clean and strip primed steel items to bare metal where site welding is required.
- B. Supply items required to be cast into concrete or embedded in masonry with setting templates to appropriate sections.

3.3 INSTALLATION

- A. Install items plumb and level, accurately fitted, free from distortion or defects.

- B. Allow for erection loads and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- C. Field weld components indicated on shop drawings.
- D. Weld joints using shielded metallic electric arc (SMAW) method. Use coated welded rods, not fluxed, or type recommended by manufacturer for use with parent metal. Use only certified welders for structural construction.
- E. Grinding: Grind welds on surfaces subject to traffic or contact to smooth flush joints (prior to galvanizing or priming).
- F. Peening: Remove flux and weld spatter as necessary to eliminate unsightly conditions and grind off sharp projections.
- G. Permanently Concealed Welds: No treatment required other than preparation for painting or galvanizing.
- H. Perform field welding in accordance with AWS standards and procedures for metal alloy welded.
- I. Obtain Architect approval prior to site cutting or making adjustments not scheduled.
- J. After erection, prime welds, abrasions and surfaces not shop primed or that are damaged during erection, except surfaces to be in contact with concrete.
- K. Repair of Galvanized Surfaces to be Painted: Ready mixed, zinc-rich galvanizing compound, ASTM D520, ASTM A780 - A2. Repair Using Paints Containing Zinc Dust, minimum thickness 5 mils.
- L. Repair of Galvanized Surfaces to be Exposed: ASTM A782 Annex A1, apply Gal-Viz while metal is still hot. Tin surface with Gal-Viz with wire brush. Do not direct flame on alloy. Minimum thickness, 5 mils.

3.4 *ERECTION TOLERANCE*

- A. Maximum Variation From Plumb: 3/16 inch per story, non-cumulative.
- B. Maximum Offset From True Alignment: 3/16 inch, non-cumulative.

3.5 *FINISHES*

- A. Paint with Gloss Polyurethane High Performance Coatings in Special Coatings per Section 09 91 00 Painting.

3.6 *SCHEDULE*

- A. Schedule is a list of principal items only. Refer to Drawing details and other specification sections for items not specifically scheduled including various miscellaneous steel angles pipes, threaded rods, tubes and similar shapers used for brackets, clips and supports for various items located throughout.

- B. Fasteners: Provide sufficient fasteners and connectors of approved types, whether indicated or not for solid secure attachment and installed in straight lines of uniform pattern. Match finish of steel unless otherwise indicated.
- C. Interior Vertical Access Ladder: as detailed in drawings for field painting.
- D. Steel Backing Plates 1/4 inch thick x widths and lengths required to support wall bumper, plumbing fixture hanger, equipment and as detailed. Cope wood studs and screw plates flush to surface with No. 14 x 2 1/2" wood screws at top and bottom of each stud (16" o.c. max.).
- E. Railing and Handrails as detailed:
 - 1. Galvanized Finish steel pipe and brackets at exterior stairs, ramps and landings where indicated in drawings.
 - 2. Steel pipe guardrails primed for field painting at interior stairs, ramps and landings where indicated in drawings.
- F. Steel brackets and supports for counter tops as detailed.
- G. Steel framing and support for plumbing, mechanical and/or electrical equipment.

END OF SECTION

SECTION 055213 - PIPE AND TUBE RAILINGS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Steel railings.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. Nonshrink, nonmetallic grout.
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

1.3 INFORMATIONAL SUBMITTALS

- A. Welding certificates.

1.4 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel in accordance with the following:
 - 1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Protect mechanical finishes on exposed surfaces of railings from damage by applying a strippable, temporary protective covering before shipping.

1.6 FIELD CONDITIONS

- A. Field Measurements: Verify actual locations of walls and other construction contiguous with railings by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Railings, including attachment to building construction, withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:
 - 1. Handrails and Top Rails of Guards:
 - a. Uniform load of **50 lbf/ ft.** applied in any direction.
 - b. Concentrated load of **200 lbf** applied in any direction.
 - c. Uniform and concentrated loads need not be assumed to act concurrently.
- B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.
 - 1. Temperature Change: **120 deg F**, ambient; **180 deg F**, material surfaces.

2.2 METALS, GENERAL

- A. Metal Surfaces, General: Provide materials with smooth surfaces, without seam marks, roller marks, rolled trade names, stains, discolorations, or blemishes.

2.3 STEEL RAILINGS

- A. Source Limitations: Obtain each type of railing from single source from single manufacturer.
- B. Pipe: ASTM A53/A53M, Type F or Type S, Grade A, Standard Weight (Schedule 40), unless another grade and weight are required by structural loads.

2.4 MISCELLANEOUS MATERIALS

- A. Welding Rods and Bare Electrodes: Select in accordance with AWS specifications for metal alloy welded.
- B. Etching Cleaner for Galvanized Metal: Complying with MPI#25.
- C. Galvanizing Repair Paint: High-zinc-dust-content paint, complying with SSPC-Paint 20 and compatible with paints specified to be used over it.
- D. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout, complying with ASTM C1107/C1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.

2.5 FABRICATION

- A. General: Fabricate railings to comply with requirements indicated for design, dimensions, member sizes and spacing, details, finish, and anchorage, but not less than that required to support structural loads.
- B. Shop assemble railings to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations.
 - 1. Clearly mark units for reassembly and coordinated installation.
 - 2. Use connections that maintain structural value of joined pieces.
- C. Cut, drill, and punch metals cleanly and accurately.
 - 1. Remove burrs and ease edges to a radius of approximately **1/32 inch** unless otherwise indicated.
 - 2. Remove sharp or rough areas on exposed surfaces.
- D. Form work true to line and level with accurate angles and surfaces.
- E. Fabricate connections that are exposed to weather in a manner that excludes water.
 - 1. Provide weep holes where water may accumulate.
 - 2. Locate weep holes in inconspicuous locations.
- F. Cut, reinforce, drill, and tap as indicated to receive finish hardware, screws, and similar items.
- G. Connections: Fabricate railings with welded connections unless otherwise indicated.
- H. Welded Connections: Cope components at connections to provide close fit, or use fittings designed for this purpose. Weld all around at connections, including at fittings.
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove flux immediately.
 - 4. At exposed connections, finish exposed welds to comply with NOMMA's "Voluntary Joint Finish Standards" for Finish #1 welds; ornamental quality with no evidence of a welded joint.
- I. Form changes in direction as follows:
 - 1. As detailed.
 - 2. By bending to smallest radius that will not result in distortion of railing member.
- J. Bend members in jigs to produce uniform curvature for each configuration required. Maintain cross section of member throughout entire bend without buckling, twisting, cracking, or otherwise deforming exposed surfaces of components.
- K. Close exposed ends of hollow railing members with prefabricated cap and end fittings of same metal and finish as railings.

2.6 STEEL AND IRON FINISHES

A. Galvanized Railings:

1. Hot-dip galvanize steel railings, including hardware, after fabrication.
2. Fill vent and drain holes that are exposed in the finished Work, unless indicated to remain as weep holes, by plugging with zinc solder and filing off smooth.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Perform cutting, drilling, and fitting required for installing railings.

1. Fit exposed connections together to form tight, hairline joints.
2. Install railings level, plumb, square, true to line; without distortion, warp, or rack.
3. Set railings accurately in location, alignment, and elevation; measured from established lines and levels.
4. Do not weld, cut, or abrade surfaces of railing components that are coated or finished after fabrication and that are intended for field connection by mechanical or other means without further cutting or fitting.
5. Set posts plumb within a tolerance of **1/16 inch in 3 feet**.
6. Align rails so variations from level for horizontal members and variations from parallel with rake of steps and ramps for sloping members do not exceed **1/4 inch in 12 feet**.

B. Adjust railings before anchoring to ensure matching alignment at abutting joints.

C. Fastening to In-Place Construction: Use anchorage devices and fasteners where necessary for securing railings and for properly transferring loads to in-place construction.

3.2 RAILING CONNECTIONS

A. Welded Connections: Use fully welded joints for permanently connecting railing components. Comply with requirements for welded connections in "Fabrication" Article, whether welding is performed in the shop or in the field.

3.3 ANCHORING POSTS

- A. Form or core-drill holes not less than **5 inches** deep and **3/4 inch** larger than OD of post for installing posts in concrete. Clean holes of loose material, insert posts, and fill annular space between post and concrete with nonshrink, nonmetallic grout, mixed and placed to comply with anchoring material manufacturer's written instructions.
- B. Leave anchorage joint exposed with anchoring material flush with adjacent surface.

3.4 CLEANING

- A. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas, and repair galvanizing to comply with ASTM A780/A780M.

3.5 PROTECTION

- A. Protect finishes of railings from damage during construction period with temporary protective coverings approved by railing manufacturer. Remove protective coverings at time of Substantial Completion.
- B. Restore finishes damaged during installation and construction period, so no evidence remains of correction work. Return items that cannot be refinished in the field to the shop; make required alterations and refinish entire unit, or provide new units.

END OF SECTION 055213

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Rough carpentry.

1.2 REFERENCES

- A. Chapters 23, 2022 CBC.
- B. ANSI/AWC HDS - 2012.
- C. DOC PS 1 - Department of Commerce Product Standard, U. S. Product Standard for Construction and Industrial Plywood.
- D. DOC PS 20 - Department of Commerce Product Standard, American Softwood Lumber Standards.
- E. DOC PS 2 - Department of Commerce Product Standard, U. S. Product Standard for Construction, Performance Standard for Wood-Based Structural-Use Panels.
- F. ANSI A135.4 - Basic Hardboard.
- G. WWPA - Western Lumber Grading Rules 88, Latest Edition, by Western Wood Products Association.
- H. APA - American Plywood Association Design/Construction Guide (Engineered Wood Association).
- I. AQMD - Local Air Quality Management District Regulations.
- J. AWPA U1 - Use Category System: User Specification for Treated Wood.
- K. WCLIB - West Coast Lumber Inspection Bureau Standard Grading Rules No. 17.
- L. Title 8 - California Code of Regulations, Construction Safety Orders.
- M. ICC –ES – International Code Council Evaluation Service, Inc.
- N. RIS – Redwood Inspection Service, Standard Specifications for Grades of California Redwood Lumber.
- O. FSC – Forest Stewardship Council Principles and Criteria.

1.3 SUBMITTALS

- A. Product data. Do not submit manufacturer's catalog's without specifically identifying the products to be reviewed for installation to the project.
- B. Current ICC-ES Reports for specified products and approved substitutions requiring ICC approvals.

1.4 QUALITY ASSURANCE

- A. Rough Carpentry Lumber: Visible grade stamp on all products required.
- B. Grade Stamp: Association under whose rules it was graded, or official grade mark of other recognized grading agencies using grading rules, equivalent to WWPA or WCLIB.
- C. Association performing grading and grade marking of lumber shall be approved by Division of the State Architect (DSA).
- D. Nailing guns and nail operators shall be approved in accordance with Title 8 Construction Safety Orders.
- E. All Plywood shall be free of urea-formaldehyde binders and adhesives.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Do not deliver rough carpentry items until site conditions are adequate to receive the Work. Protect items from weather while in transit.
- B. Store lumber and plywood at the site under cover or otherwise protected against exposure to weather, raise above ground and out of contact with damp or wet surfaces. Stack lumber and plywood and provide for air circulation within and around stacks and under temporary covers. For pressure treated lumber and plywood, provide spacers between courses to permit air circulation.
- C. Certified wood shall be kept separate from non-certified wood. Auditing process as mandated by certifiers shall be complied with.

1.6 PROJECT CONDITIONS

- A. Cooperate with other trades in coordinating their Work with the Work of this Section. Provide wood grounds, blocking and nailers where indicated or as required for Work of other trades.

PART 2 PRODUCTS

2.1 ROUGH CARPENTRY MATERIALS

- A. Lumber: Graded in accordance with WWPA or WCLIB; maximum moisture content of 19 percent at time of loading. Provide Douglas Fir Larch for structural and framing

lumber, surfaced four sides to standards of the grading association unless otherwise indicated on Drawings, use the following grades

1. Joists, rafters, beams, lintels, horizontal framing, posts, studs and vertical framing: Species and grades as indicated or noted on drawings.
 2. Non-bearing studs and plates, non-structural furring, concealed blocking, stripping and miscellaneous nailers and backing: No. 2 unless noted otherwise in the structural drawings.
 3. Structural Drawings take precedence for lumber grades.
 4. All lumber in contact with concrete shall be pressure treated.
- B. Shop Fabricated Structural Wood:
1. Laminated Veneer Lumber (LVL) 1.9E – ICC approved.
- C. Plywood (Wood Structural Panels): Section 2303.1.5 CBC, Douglas Fir 1 Group Species, PS 1, APA Structural I Rated Sheathing. Bond Classification: Exterior. Thickness as indicated, span rating sized for spacing.
1. Plywood shall be FSC certified; other sustainable forestry certifications will not be accepted.
- D. Preservative (Pressure) Treated Lumber: Section 2303.1.9 Conform to AWP Manual of Recommended Practice, kiln dry after treatment. Use preservative complying with AWP U1, latest edition. Products NOT containing arsenic or chromium. Conform to AQMD, Local Regulations.
1. Douglas Fir Larch, used as required by Section 2303, CBC, shall conform to the following
 - a. Lumber shall be WWP or WCLIB grade stamped.
 - b. Lumber shall be No. 1 grade or better unless indicated otherwise on Drawings.
- E. Waterproof Membrane: ASTM D4601; Type II, asphalt saturated glass felt.
- F. Fire-Retardant Treated Wood: Section 2303.2 CBC
1. Fire-Retardant Douglas Fir Lumber: Lumber shall be grade stamped by an approved agency at the factory, and shall bear identification indicating the fire performance rating thereof, Flame Spread Less than 25, ASTM E84. Lumber: AWP C20.
 2. Fire-Retardant Treated Douglas Fir Plywood: AWP Standard C-27, NFPA 703, ASTM D-5516, ASTM E-84, Section 2303.2, CBC, PS 1-09, APA structural rated sheathing, Exposure 1, 5/8 thick. Plywood shall comply with the following Maximum Flame Spread Classifications in the following locations

G. Plywood Backing Panels

1. Telephone and Electrical Equipment, fixed equipment, cabinets, grab bars, door stops and plates: DOC PS 1, Exposure 1, APA A-C, sanded, Veneer Grade, fire-retardant treated, in thickness indicated or, if not indicated, not less than 1 inch nominal thickness. Installed "A" side out for paint finish. Install with minimum #12 sheet metal screws or wood screws for steel stud or wood stud wall construction, respectively at 6" o.c. all edges and intermediate support studs.
- H. Nails, Spikes and Staples: Section 2303.6 and 2304.10 CBC, Hot-Dipped Zinc Coated Galvanized for exterior exposed applications, high humidity locations and installation into treated wood and within 8" of soil or exterior slabs; plain finish for other interior locations; size and type to suit application. Comply with Table 2304.10.1. Use common nails only.
- I. Bolts, Nuts, Washers, Lags, and Screws: Section 2304.10 CBC, sized to suit application, galvanized for exterior locations, high humidity locations and treated wood, plain finish for other interior locations. Full diameter body bolts only per ASME B18.2.1(.2) or B18.2.6 for structural applications.
- J. Fasteners: Expansion type or powder actuated type for anchorage to solid masonry or concrete. Refer to Structural Drawings for acceptable types and required testing. Where installation and torque verification of wedge-type anchors is inspected by the IOR, testing of anchors will not be required unless directed by the SEOR for structural tension applications.
- K. Stock Framing Connectors: Section 2304.10 CBC types indicated on Drawings, galvanized, with nails fully driven in all holes in each face of connector. Conform to the following.
1. Manufacturers: Simpson Strong Tie Co., Inc., San Leandro, CA, United Steel Products, Montgomery, MN. or equal as approved in accordance with Division 01 General Requirements for Substitutions.
 2. ICC Listed.
- L. Non-Stock Framing Connectors: Conform to details. No substitutions allowed.
- M. Nonshrink Grout: ASTM C1107, premixed compound consisting of non-metallic aggregate, cement, water reducing and plasticizing agents; capable of developing minimum compressive strength of 5,000 psi in 7 days; of consistency for application and a 30 minute working time. Acceptable Manufacturers: Dayton Superior, Miamisburg, OH; Sonneborn, Shakopee, MN; Novex Systems International, Clifton NJ, or equal.
- N. Sill-Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch (6.4 mm) thick, selected from manufacturer's standard widths to suit width of sill members indicated.
- O. Adhesives: Formulation complying with ASTM D 3498 that is approved for use indicated by adhesive manufacturer.

PART 3 EXECUTION

3.1 LAYOUT MARKINGS

- A. Layout markings shall not be made with xylene-based inks, paint, or dyes, or with other solvent-based products that may bleed through finishes.

3.2 FRAMING, FURRING AND STRIPPING

- A. Erect wood framing, furring, stripping and nailing members true to lines and levels. Do not deviate from true alignment more than 1/4 inch in 10 feet, non-cumulative.
- B. Construct members of continuous pieces of longest possible lengths.
- C. Construct and erect required headers and lintels.
- D. Use multiple wall framing members at openings as indicated on structural drawings. Space short members above and below openings in same manner as for walls.
- E. Provide double joist headers at joist ends and around openings unless otherwise indicated on Drawings. Bridge joists and rafters to conform Section 2304 CBC and as noted on plans. For pre-manufactured joists, provide bridging in accordance with manufacturer's recommendations.
- F. Construct walls with studs of size spacing indicated, 16 inches on center unless otherwise indicated on drawings. Install single sill member at bottom and double plate at top. Stagger upper and lower members of double plate with joints not less than 4 feet o.c. or as indicated on Drawings. Where sill or any wood member contacts concrete or masonry within 8" of soil or exterior slab or setting on interior slab, install preservative-treated lumber.

3.3 PLYWOOD SHEATHING

- A. Thickness as indicated on the Drawings, minimum thickness 15/32 inch.
- B. Nailing: of size and spacing indicated. Common wire only unless indicated use hot-dipped zinc coated galvanized in treated wood or wood within 8" of soil or exterior slabs.
- C. Blocking: Panel edges shall bear on framing members or solid blocking.
- D. Minimum Size Vertical Panel: 16 inches wide.
- E. Minimum Size Horizontal Panel: 24 inches wide.
- F. Oriented Strand Board not permitted.

3.4 FOUNDATION FRAMING, PLATES, SILLS AND SLEEPERS

- A. Preservative treated wood required. Set wood sills on a bead of continuous butyl sealant on both edges of sill.

- B. B. Use hot-dipped zinc coated galvanized nails in treated wood and wood within 8" of soil or exterior slabs.

3.5 *INSTALLATION OF BACKBOARDS*

- A. Provide backing panels as indicated on Drawings to support telephone and electrical equipment, fixed equipment, cabinets, grab bars, door stops and plates. Fasten securely to framing. Ensure that backing panels are installed with good side out (whose face side is free of blemishes) side by side, no mix of sides permitted.
- B. Install to extent indicated on the drawings or as required for electrical or communication system installation.
- C. Install with sheet metal screws, No.10 minimum, at 12 inches on center minimum. Drywall screws will not be permitted.
- D. Prime paint exposed faces. Do not cover manufacturer's trade stamps indicating fire treatment.
- E. Final finish per Section 09 90 00, Painting.

END OF SECTION

SECTION 064116 - PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plastic-laminate-clad architectural cabinets.
2. Cabinet hardware and accessories.
3. Miscellaneous materials.

B. Related Requirements:

1. Section 061000 "Rough Carpentry" for wood furring, blocking, shims, and hanging strips required for installing cabinets that are concealed within other construction before cabinet installation.
2. Section 051200 "Structural Steel Framing" for backing required for installing cabinets that is concealed within other construction before cabinet installation.

1.2 COORDINATION

- A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to support loads imposed by installed and fully loaded cabinets.
- B. Hardware Coordination: Distribute copies of approved hardware schedule specified in Section 087100 "Door Hardware" to manufacturer of architectural cabinets; coordinate Shop Drawings and fabrication with hardware requirements.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data:

1. Plastic-laminate-clad architectural cabinets.
2. Cabinet hardware and accessories.
3. Miscellaneous materials.

B. Product Data Submittals: For each product.

C. Shop Drawings:

1. Include plans, elevations, sections, and attachment details.
 2. Show large-scale details.
 3. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
 4. Show locations and sizes of cutouts and holes for items installed in plastic-laminate architectural cabinets.
- D. Samples: For each exposed product and for each color and texture specified, in manufacturer's or manufacturer's standard size.
- E. Samples for Initial Selection: For each type of exposed finish.
- F. Samples for Verification: For the following:
1. Plastic Laminates: 8 by 10 inches, for each type, color, pattern, and surface finish required.
 2. Exposed Cabinet Hardware and Accessories: One full-size unit for each type and finish.

1.5 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For the following:
1. Composite wood products.
 2. High-pressure decorative laminate.
 3. Adhesives.

1.6 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver cabinets until painting and similar finish operations that might damage architectural cabinets have been completed in installation areas. Store cabinets in installation areas or in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1.8 FIELD CONDITIONS

- A. Environmental Limitations with Humidity Control: Do not deliver or install cabinets until building is enclosed, wet-work is complete, and HVAC system is operating and maintaining temperature between 60 and 90 deg F and relative humidity between 25 and 55 percent during the remainder of the construction period.

- B. Field Measurements: Where cabinets are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
 - 1. Locate concealed framing, blocking, and reinforcements that support cabinets by field measurements before being enclosed/concealed by construction, and indicate measurements on Shop Drawings.
- C. Established Dimensions: Where cabinets are indicated to fit to other construction, establish dimensions for areas where cabinets are to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

PART 2 - PRODUCTS

2.1 PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

- A. Quality Standard: Unless otherwise indicated, comply with the Architectural Woodwork Standards for grades of cabinets indicated for construction, finishes, installation, and other requirements.
- B. Architectural Woodwork Standards Grade: Custom.
- C. Type of Construction: Frameless.
- D. Door and Drawer-Front Style: Flush overlay.
- E. High-Pressure Decorative Laminate: ISO 4586-3, grades as indicated or if not indicated, as required by quality standard.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Formica Corporation
 - b. Pionite; a Panolam Industries International, Inc. brand
 - c. Wilsonart LLC
- F. Exposed Surfaces:
 - 1. Plastic-Laminate Grade: VGS.
 - 2. Edges: Grade VGS.
 - 3. Pattern Direction: Vertically for doors and fixed panels, horizontally for drawer fronts.
- G. Semiexposed Surfaces:
 - 1. Surfaces Other Than Drawer Bodies: Thermally fused laminate panels.

- a. Edges of Thermally Fused Laminate Panel Shelves: PVC or polyester edge banding.
 - b. For semiexposed backs of panels with exposed plastic-laminate surfaces, provide surface of high-pressure decorative laminate, ISO 4586-3, grade to match exposed surface.
 2. Drawer Sides and Backs: Thermally fused laminate panels with PVC or polyester edge banding.
 3. Drawer Bottoms: Thermally fused laminate panels.
- H. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces complying with the following requirements:
1. As selected by Architect from laminate manufacturer's full range in the following categories:
 - a. Wood grains, matte finish.
 - b. Patterns, matte finish.

2.2 WOOD MATERIALS

- A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of architectural cabinet and quality grade specified unless otherwise indicated.
1. Wood Moisture Content: 5 to 10 percent.
- B. Composite Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of architectural cabinet and quality grade specified unless otherwise indicated.
1. Medium-Density Fiberboard (MDF): ANSI A208.2, Grade 130.
 2. Particleboard (Medium Density): ANSI A208.1, Grade M-2.
 3. Softwood Plywood: DOC PS 1, medium-density overlay.

2.3 CABINET HARDWARE AND ACCESSORIES

- A. Cabinet Hardware: Provide cabinet hardware and accessory materials associated with architectural cabinets except for items specified in Section 087100 "Door Hardware."
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Hardware Resources
 - b. Julius Blum & Co., Inc.
 - c. Knappe & Vogt Manufacturing Company
- B. Frameless Concealed Hinges (European Type): ANSI/BHMA A156.9, B01602, 100

degrees of opening, self-closing.

- C. Wire Pulls: Back mounted, solid metal, 4 inches long, 5/16 inch in diameter.
- D. Adjustable Shelf Standards and Supports: ANSI/BHMA A156.9, B04071; with shelf rests, B04081.
- E. Shelf Rests: ANSI/BHMA A156.9, B04013; metal.
- F. Drawer Slides: ANSI/BHMA A156.9.
 - 1. Standard Duty (Grade 1 and Grade 2): Side mount.
 - 2. General-purpose drawers more than 3 inches high, but not more than 6 inches high and not more than 24 inches wide, provide 75 lb load capacity.
- G. Door Locks: ANSI/BHMA A156.11, E07121.
- H. Drawer Locks: ANSI/BHMA A156.11, E07041.
- I. Door and Drawer Silencers: ANSI/BHMA A156.16, L03011.
- J. Exposed Hardware Finishes: For exposed hardware, provide finish that complies with ANSI/BHMA A156.18 for ANSI/BHMA finish number indicated.
 - 1. Satin Chromium Plated: ANSI/BHMA 626 for brass or bronze base; ANSI/BHMA 652 for steel base.
- K. For concealed hardware, provide manufacturer's standard finish that complies with product class requirements in ANSI/BHMA A156.9.

2.4 MISCELLANEOUS MATERIALS

- A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln-dried to less than 15 percent moisture content.
- B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.
- C. Adhesive for Bonding Plastic Laminate: Type II water-resistant type as selected by fabricator to comply with requirements.
 - 1. Adhesive for Bonding Edges: Hot-melt adhesive or adhesive specified above for faces.

2.5 FABRICATION

- A. Fabricate architectural cabinets to dimensions, profiles, and details indicated.

- B. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
- C. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Before installation, condition cabinets to humidity conditions in installation areas for not less than 72 hours.

3.2 INSTALLATION

- A. Architectural Woodwork Standards Grade: Install cabinets to comply with quality standard grade of item to be installed.
- B. Assemble cabinets and complete fabrication at Project site to extent that it was not completed in the shop.
- C. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with wafer-head cabinet installation screws.
- D. Install cabinets level, plumb, and true in line to a tolerance of **1/8 inch in 96 inches** using concealed shims.
 - 1. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
 - 2. Install cabinets without distortion so doors and drawers fit openings and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.
 - 3. Fasten wall cabinets through back, near top and bottom, and at ends not more than **16 inches** o.c. with No. 10 wafer-head sheet metal screws through metal backing or metal framing behind wall finish.

3.3 ADJUSTING AND CLEANING

- A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects. Where not possible to repair, replace architectural cabinets. Adjust joinery for uniform appearance.

- B. Clean, lubricate, and adjust hardware.
- C. Clean cabinets on exposed and semiexposed surfaces.

END OF SECTION 064116

SECTION 066400 - PLASTIC PANELING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plastic sheet paneling.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For plastic paneling and trim accessories, in manufacturer's standard sizes.

1.3 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install plastic paneling until spaces are enclosed and weathertight and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain plastic paneling and trim accessories from single manufacturer.

2.2 PLASTIC SHEET PANELING

- A. Glass-Fiber-Reinforced Plastic Paneling: Gelcoat-finished, glass-fiber-reinforced plastic panels complying with ASTM D5319.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Crane Composites, Inc.
 - b. Glasteel
 - c. Marlite, Inc.
 2. Surface-Burning Characteristics: As follows when tested by a qualified testing agency in accordance with ASTM E84. Identify products with appropriate

markings of applicable testing agency.

- a. Flame-Spread Index: 200 or less.
 - b. Smoke-Developed Index: 450 or less.
- 3. Nominal Thickness: Not less than 0.09 inch.
 - 4. Surface Finish: Molded pebble texture.
 - 5. Color: White.

2.3 ACCESSORIES

- A. Trim Accessories: Manufacturer's standard one-piece vinyl extrusions designed to retain and cover edges of panels. Provide division bars, inside corners, outside corners, and caps as needed to conceal edges.
 - 1. Color: Match panels.
- B. Exposed Fasteners: Nylon drive rivets recommended by panel manufacturer.
- C. Adhesive: As recommended by plastic paneling manufacturer.
- D. Sealant: Mildew-resistant, single-component, neutral-curing or acid-curing silicone sealant recommended by plastic paneling manufacturer and complying with requirements in Section 079200 "Joint Sealants."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove wallpaper, vinyl wall covering, loose or soluble paint, and other materials that might interfere with adhesive bond.
- B. Prepare substrate by sanding high spots and filling low spots as needed to provide flat, even surface for panel installation.
- C. Clean substrates of substances that could impair adhesive bond, including oil, grease, dirt, and dust.
- D. Condition panels by unpacking and placing in installation space before installation according to manufacturer's written recommendations.

- E. Lay out paneling before installing. Locate panel joints to provide equal panels at ends of walls not less than half the width of full panels.
 - 1. Mark plumb lines on substrate at panel joint locations for accurate installation.
 - 2. Locate panel joints to allow clearance at panel edges according to manufacturer's written instructions.

3.3 INSTALLATION

- A. Install plastic paneling according to manufacturer's written instructions.
- B. Install panels in a full spread of adhesive.
- C. Install trim accessories with adhesive.
- D. Fill grooves in trim accessories with sealant before installing panels, and bed inside corner trim in a bead of sealant.
- E. Maintain uniform space between panels and wall fixtures. Fill space with sealant.
- F. Maintain uniform space between adjacent panels and between panels and floors, ceilings, and fixtures. Fill space with sealant.
- G. Remove excess sealant and smears as paneling is installed. Clean with solvent recommended by sealant manufacturer and then wipe with clean dry cloths until no residue remains.

END OF SECTION 066400

SECTION 072100 - THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Glass-fiber blanket insulation.

B. Related Requirements:

1. Section 092900 "Gypsum Board" for sound attenuation blanket used as acoustic insulation.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Installer's Certification: Listing type, manufacturer, and R-value of insulation installed in each element of the building thermal envelope.

1. Sign, date, and post the certification in a conspicuous location on Project site.

- B. Product Test Reports: For each product, for tests performed by a qualified testing agency.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Protect insulation materials from physical damage and from deterioration due to moisture, soiling, and other sources. Store inside and in a dry location. Comply with manufacturer's written instructions for handling, storing, and protecting during installation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: Maximum flame-spread and smoke-developed indexes less than Class A, 25 and 450 when tested in accordance with ASTM E84.

- B. Thermal-Resistance Value (R-Value): R-value as indicated on Drawings in accordance

with ASTM C518.

- C. Recycled Content: Postconsumer recycled content plus one-half of preconsumer recycled content not less than <Insert number> percent.

2.2 GLASS-FIBER BLANKET INSULATION

- A. Glass-Fiber Blanket Insulation, Unfaced: ASTM C665, Type I; passing ASTM E136 for combustion characteristics.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed; SAINT-GOBAIN
 - b. Johns Manville; a Berkshire Hathaway company
 - c. Knauf Insulation
 - d. Owens Corning

2.3 INSULATION FASTENERS

- A. Insulation Fastener Accessories: Provide double-pointed weld pins, lagging pins, quilting pins, duct liner pins, insulation hangers, specialty washers, special caps, j-hooks, capacitor discharge annular weld pins, capacitor discharge acoustical lagging pins, and other accessory materials that are recommended in writing by insulation fastener manufacturer to produce complete insulation supports.

2.4 ACCESSORIES

- A. Insulation for Miscellaneous Voids:
 - 1. Glass-Fiber Insulation: ASTM C764, Type II, loose fill; with maximum flame-spread and smoke-developed indexes of 5, per ASTM E84.
 - 2. Spray Polyurethane Foam Insulation: ASTM C1029, Type II, closed cell, with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, per ASTM E84.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean substrates of substances that are harmful to insulation, including removing projections capable of puncturing insulation or vapor retarders, or those that interfere with insulation attachment.

3.2 INSTALLATION, GENERAL

- A. Comply with insulation manufacturer's written instructions applicable to products, applications and applicable codes.
- B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed to ice, rain, or snow at any time.
- C. Extend insulation to envelop entire area to be insulated. Fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.
- D. Provide sizes to fit applications and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units unless multiple layers are otherwise shown or required to make up total thickness or to achieve R-value.

3.3 INSTALLATION OF INSULATION IN FRAMED CONSTRUCTION

- A. Blanket Insulation: Install in cavities formed by framing members in accordance with the following requirements:
 - 1. Use insulation widths and lengths that fill the cavities formed by framing members. If more than one length is required to fill the cavities, provide lengths that will produce a snug fit between ends.
 - 2. Place insulation in cavities formed by framing members to produce a friction fit between edges of insulation and adjoining framing members.
 - 3. Maintain **3-inch** clearance of insulation around recessed lighting fixtures not rated for or protected from contact with insulation.
 - 4. For metal-framed wall cavities where cavity heights exceed **96 inches**, support unfaced blankets mechanically .
 - 5. Where glass-fiber blankets are indicated for sound attenuation above ceilings, install unfaced blanket insulation over ceiling area in thickness indicated. Where partitions occur, extend insulation up either side of partition.
- B. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:
 - 1. Glass-Fiber Insulation: Compact to approximately 40 percent of normal maximum volume equaling a density of approximately **2.5 lb/cu. ft.**.
 - 2. Detailing Foam Insulation for Voids: Apply in accordance with manufacturer's written instructions.

3.4 PROTECTION

- A. Protect installed insulation from damage due to harmful weather exposures, physical abuse, and other causes.
- B. Provide temporary coverings or enclosures where insulation is subject to abuse and cannot be concealed and protected by permanent construction immediately after

installation.

END OF SECTION 072100

SECTION 072600 - VAPOR RETARDERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Polyethylene vapor retarders.
- B. Related Requirements:
 - 1. Section 033000 "Cast-in-Place Concrete" for under-slab vapor retarders.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. Polyethylene vapor retarders.

1.3 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: For each product, for tests performed by a qualified testing agency.

PART 2 - PRODUCTS

2.1 POLYETHYLENE VAPOR RETARDERS

- A. Polyethylene Vapor Retarders: ASTM D4397, 10-mil- thick sheet, with maximum permeance rating of 0.1 perm.

2.2 ACCESSORIES

- A. Vapor-Retarder Tape: Pressure-sensitive tape of type recommended by vapor-retarder manufacturer for sealing joints and penetrations in vapor retarder.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean substrates of substances that are harmful to vapor retarders, including removing

projections capable of puncturing vapor retarders.

3.2 PROTECTION

- A. Protect vapor retarders from damage until concealed by permanent construction.

END OF SECTION 072600

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Silicone joint sealants.
2. Mildew-resistant joint sealants.
3. Latex joint sealants.

B. Related Requirements:

1. Section 079219 "Acoustical Joint Sealants" for sealing joints in sound-rated construction.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Silicone joint sealants.
2. Mildew-resistant joint sealants.
3. Latex joint sealants.

B. Samples for Initial Selection: Manufacturer's standard color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.

C. Samples for Verification: For each type and color of joint sealant required, provide Samples with joint sealants in **1/2-inch-** wide joints formed between two **6-inch-** long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.

D. Joint-Sealant Schedule: Include the following information:

1. Joint-sealant application, joint location, and designation.
2. Joint-sealant manufacturer and product name.
3. Joint-sealant formulation.
4. Joint-sealant color.

1.3 INFORMATIONAL SUBMITTALS

A. Preconstruction Laboratory Test Schedule: Include the following information for each joint sealant and substrate material to be tested:

1. Joint-sealant location and designation.

2. Manufacturer and product name.
3. Type of substrate material.
4. Proposed test.
5. Number of samples required.

- B. Preconstruction Laboratory Test Reports: For each joint sealant and substrate material to be tested from sealant manufacturer, indicating the following:
1. Materials forming joint substrates and joint-sealant backings have been tested for compatibility and adhesion with joint sealants.
 2. Interpretation of test results and written recommendations for primers and substrate preparation are needed for adhesion.
- C. Preconstruction Field-Adhesion-Test Reports: Indicate which sealants and joint preparation methods resulted in optimum adhesion to joint substrates based on testing specified in "Preconstruction Testing" Article.
- D. Field Quality-Control Reports: For field-adhesion-test reports, for each sealant application tested.
- E. Sample warranties.

1.4 CLOSEOUT SUBMITTALS

- A. Manufacturers' special warranties.
- B. Installer's special warranties.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Authorized representative who is trained and approved by manufacturer.
- B. Testing Agency Qualifications: Qualified in accordance with ASTM C1021 to conduct the testing indicated.

1.6 MOCKUPS

- A. Install sealant in mockups of assemblies specified in other Sections that are indicated to receive joint sealants specified in this Section. Use materials and installation methods specified in this Section.

1.7 PRECONSTRUCTION TESTING

- A. Preconstruction Laboratory Testing: Submit to joint-sealant manufacturers, for testing indicated below, samples of materials that will contact or affect joint sealants.
 1. Adhesion Testing: Use ASTM C794 to determine whether priming and other

- specific joint preparation techniques are required to obtain rapid, optimum adhesion of joint sealants to joint substrates.
2. Compatibility Testing: Use ASTM C1087 to determine sealant compatibility when in contact with glazing and gasket materials.
 3. Stain Testing: Use ASTM C1248 to determine stain potential of sealant when in contact with masonry substrates.
 4. Submit manufacturer's recommended number of pieces of each type of material, including joint substrates, joint-sealant backings, and miscellaneous materials.
 5. Schedule sufficient time for testing and analyzing results to prevent delaying the Work.
 6. For materials failing tests, obtain joint-sealant manufacturer's written instructions for corrective measures, including use of specially formulated primers.
 7. Testing will not be required if joint-sealant manufacturers submit data that are based on previous testing, not older than 24 months, of sealant products for adhesion to, staining of, and compatibility with joint substrates and other materials matching those submitted.
- B. Preconstruction Field-Adhesion Testing: Before installing sealants, field test their adhesion to Project joint substrates as follows:
1. Locate test joints where indicated on Project or, if not indicated, as directed by Architect.
 2. Conduct field tests for each kind of sealant and joint substrate.
 3. Notify Architect seven days in advance of dates and times when test joints will be erected.
 4. Test Method: Test joint sealants in accordance with Method A, Tail Procedure, in ASTM C1521.
 - a. For joints with dissimilar substrates, verify adhesion to each substrate separately; extend cut along one side, verifying adhesion to opposite side. Repeat procedure for opposite side.
 5. Report whether sealant failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each kind of product and joint substrate. For sealants that fail adhesively, retest until satisfactory adhesion is obtained.
 6. Evaluation of Preconstruction Field-Adhesion-Test Results: Sealants not evidencing adhesive failure from testing, in absence of other indications of noncompliance with requirements, will be considered satisfactory. Do not use sealants that fail to adhere to joint substrates during testing.

1.8 FIELD CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:
1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer.
 2. When joint substrates are wet.
 3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.

4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.9 WARRANTY

- A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Manufacturer's Warranty: Manufacturer agrees to furnish joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 1. Warranty Period: Five years from date of Substantial Completion.
- C. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:
 1. Movement of the structure caused by stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
 2. Disintegration of joint substrates from causes exceeding design specifications.
 3. Mechanical damage caused by individuals, tools, or other outside agents.
 4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain joint sealants from single manufacturer for each sealant type.

2.2 JOINT SEALANTS, GENERAL

- A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.
- B. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.3 SILICONE JOINT SEALANTS

- A. Silicone, S, NS, 50, NT: Single-component, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM

C920, Type S, Grade NS, Class 50, Use NT.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. GE Construction Sealants; Momentive Performance Materials Inc.
 - b. Pecora Corporation
 - c. Sika Corporation - Building Components
 - d. The Dow Chemical Company

2.4 MILDEW-RESISTANT JOINT SEALANTS

- A. Mildew-Resistant Joint Sealants: Formulated for prolonged exposure to humidity with fungicide to prevent mold and mildew growth.
- B. Silicone, Mildew Resistant, Acid Curing, S, NS, 25, NT: Mildew-resistant, single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, acid-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 25, Use NT.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. GE Construction Sealants; Momentive Performance Materials Inc.
 - b. Pecora Corporation
 - c. Sika Corporation - Building Components
 - d. The Dow Chemical Company

2.5 LATEX JOINT SEALANTS

- A. Acrylic Latex: Acrylic latex or siliconized acrylic latex, ASTM C834, Type OP, Grade NF.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Pecora Corporation
 - b. PPG Paints; PPG Industries, Inc.
 - c. Sherwin-Williams Company (The)

2.6 JOINT-SEALANT BACKING

- A. Sealant Backing Material: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Adfast
 - b. Alcot Plastics Ltd.
 - c. Construction Foam Products; a division of Nomaco, Inc.
- B. Cylindrical Sealant Backings: ASTM C1330, or any of the preceding types, as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.7 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 1. Remove all foreign material from joint substrates that could interfere with

adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.

2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:

- a. Concrete.
- b. Masonry.

3. Remove laitance and form-release agents from concrete.
4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous joint substrates include the following:

- a. Metal.
- b. Glass.
- c. Porcelain enamel.
- d. Glazed surfaces of ceramic tile.

- B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. Sealant Installation Standard: Comply with recommendations in ASTM C1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install sealant backings of type indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 1. Do not leave gaps between ends of sealant backings.
 2. Do not stretch, twist, puncture, or tear sealant backings.
 3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.

- D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants in accordance with requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 - 1. Remove excess sealant from surfaces adjacent to joints.
 - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 - 3. Provide concave joint profile in accordance with Figure 8A in ASTM C1193 unless otherwise indicated.

3.4 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Field-Adhesion Testing: Field test joint-sealant adhesion to joint substrates as follows:
 - a. Extent of Testing: Test completed and cured sealant joints as follows:
 - 1) Perform 10 tests for the first 1000 ft. of joint length for each kind of sealant and joint substrate.
 - 2) Perform one test for each 1000 ft. of joint length thereafter or one test per each floor per elevation.
 - b. Test Method: Test joint sealants in accordance with Method A, Tail Procedure, in ASTM C1521.
 - 1) For joints with dissimilar substrates, verify adhesion to each substrate separately; extend cut along one side, verifying adhesion to opposite side. Repeat procedure for opposite side.
 - c. Inspect tested joints and report on the following:
 - 1) Whether sealants filled joint cavities and are free of voids.
 - 2) Whether sealant dimensions and configurations comply with specified requirements.
 - 3) Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull

distance used to test each kind of product and joint substrate. Compare these results to determine if adhesion complies with sealant manufacturer's field-adhesion hand-pull test criteria.

- d. Record test results in a field-adhesion-test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant material, sealant configuration, and sealant dimensions.
 - e. Repair sealants pulled from test area by applying new sealants following same procedures used originally to seal joints. Ensure that original sealant surfaces are clean and that new sealant contacts original sealant.
2. Evaluation of Field-Adhesion-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.
- B. Prepare test and inspection reports.

3.5 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.6 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

END OF SECTION 079200

SECTION 079219 - ACOUSTICAL JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: Acoustical joint sealants.
- B. Related Requirements:
 - 1. Section 079200 "Joint Sealants" for elastomeric, latex, and butyl-rubber-based joint sealants for nonacoustical applications.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants, showing full range of available colors for each product exposed to view.
- C. Samples for Verification: For each type and color of acoustical joint sealant required.
 - 1. Size: **1/2-inch-** wide sealant joints formed between two **6-inch-** long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.
- D. Acoustical Joint-Sealant Schedule: Include the following information:
 - 1. Joint-sealant application, joint location, and designation.
 - 2. Joint-sealant manufacturer and product name.
 - 3. Joint-sealant formulation.
 - 4. Joint-sealant color.

1.3 INFORMATIONAL SUBMITTALS

- A. Test and Evaluation Reports:
 - 1. Product Test Reports: For each type of acoustical joint sealant, for tests performed by qualified testing agency.
- B. Sample warranties.

1.4 CLOSEOUT SUBMITTALS

- A. Warranty Documentation:
 - 1. Manufacturers' special warranties.

2. Installer's special warranties.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained between **40 and 95 deg F**.
 1. Maintain containers in clean condition, free of foreign materials and residue.
 2. Remove rags and waste from storage areas daily.

1.6 FIELD CONDITIONS

- A. Apply coatings only when temperature of surfaces to be coated and ambient air temperatures are between **35 and 100 deg F**.

1.7 WARRANTY

- A. Installer's Special Warranty: Installer agrees to repair or replace acoustical joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 1. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 ACOUSTICAL JOINT SEALANTS

- A. Acoustical joint-sealant products that effectively reduce airborne sound transmission through perimeter joints and openings in building construction, as demonstrated by testing representative assemblies in accordance with ASTM E90.
- B. Acoustical Sealant for Exposed and Concealed Joints: Manufacturer's standard nonsag, paintable, nonstaining latex acoustical sealant complying with ASTM C834.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. DAP Products Inc.
 - b. Grabber Construction Products, Inc.
 - c. Hilti, Inc.
 - d. Pecora Corporation
 2. Colors of Exposed Acoustical Joint Sealants: As selected by Architect from manufacturer's full range of colors.

2.2 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by acoustical joint-sealant manufacturer where required for adhesion of sealant to joint substrates.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive acoustical joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing acoustical joint sealants to comply with joint-sealant manufacturer's written instructions.
- B. Joint Priming: Prime joint substrates where recommended by acoustical joint-sealant manufacturer. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF ACOUSTICAL JOINT SEALANTS

- A. Comply with acoustical joint-sealant manufacturer's written installation instructions unless more stringent requirements apply.
- B. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical joint sealant. Install acoustical joint sealants at both faces of partitions, at perimeters, and through penetrations. Comply with ASTM C919, ASTM C1193, and manufacturer's written instructions for closing off sound-flanking paths around or through assemblies,

including sealing partitions to underside of floor slabs above acoustical ceilings.

- C. Acoustical Ceiling Areas: Apply acoustical joint sealant at perimeter edge moldings of acoustical ceiling areas in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.

3.4 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of acoustical joint sealants and of products in which joints occur.

3.5 PROTECTION

- A. Protect acoustical joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated acoustical joint sealants immediately so installations with repaired areas are indistinguishable from original work.

END OF SECTION 079219

SECTION 081116.13 - INTERIOR ALUMINUM DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior aluminum frames.

1.2 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.
 - a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings:

1. Elevations, sections, and installation details for each wall-opening condition.
2. Details of construction of each component, including dimensioned profiles and metal thicknesses.
3. Locations of reinforcements and preparations for hardware.
4. Details of anchorages, joints, splices, connections, and accessories.
5. Details of trim, removable stops, and glazing.

C. Samples for Initial Selection: Manufacturer's standard color sheets, showing full range of available colors for each type of exposed finish.

D. Samples for Verification: Actual sample of finished products for each type of the following products:

1. Framing Member and Finish: **12 inches** long. Include trim.
2. Window Corner Fabrication and Finish: **12-by-12-inch-** long, full-size corner, including full-size sections of extrusions with removable stops.

E. Product Schedule: Use same designations indicated on Drawings. Coordinate with door hardware schedule and glazing.

1.3 CLOSEOUT SUBMITTALS

A. Maintenance Data: For interior aluminum doors and frames.

PART 2 - PRODUCTS

2.1 INTERIOR ALUMINUM DOORS AND FRAMES

- A. Manufacturers: Subject to compliance with requirements, provide products by the following available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Alpha Aluminum Architectural Products
 - 2. Western Integrated Materials, Inc.
- B. Source Limitations: Obtain interior aluminum doors and frames from single source from single manufacturer.
- C. Aluminum Framing: [ASTM B221](#), with alloy and temper required to suit structural and finish requirements, and not less than [0.062 inch](#) thick.
- D. Door Frames: Extruded aluminum, reinforced for hinges, strikes, and closers.
- E. Glazing Frames: Extruded aluminum, for glass thickness indicated on Drawings.
- F. Trim: Extruded aluminum, not less than [0.062 inch](#) thick; removable, snap-in casing trim, without exposed fasteners.
 - 1. Trim Style: As indicated on Drawings.

2.2 ACCESSORIES

- A. Wood Doors: As specified in Section 081416 "Flush Wood Doors."
- B. Fasteners: Aluminum, nonmagnetic, stainless steel, zinc-plated steel or other noncorrosive metal fasteners compatible with frames, stops, panels, reinforcement plates, hardware, anchors, and other items being fastened.
- C. Corner Reinforcements and Alignment Clips: Manufacturer's standard concealed units to provide accurately fitted hairline joints at butted and mitered connections.
- D. Door Silencers: Manufacturer's standard continuous mohair, wool pile, or vinyl seals, black.
- E. Glazing Gaskets: Manufacturer's standard extruded or molded rubber or plastic, to accommodate glazing thickness indicated; black.
- F. Glazing Stops: Removable to allow glazing replacement without framing disassembly.
- G. Glass: As specified in Section 088000 "Glazing."
- H. Door Hardware: As specified in Section 087100 "Door Hardware."

2.3 FABRICATION

- A. Hardware Preparation: Factory prepare components to receive templated mortised hardware; include cutouts, reinforcements, mortising, drilling, and tapping.
 - 1. Reinforce doors and frames to receive nontemplated mortised and surface-mounted hardware.
 - 2. Locate hardware as indicated on Drawings.
- B. Glazing Stops: Locate removable stops on inside of spaces accessed by locking doors.
- C. Fabricate components to allow secure installation without exposed fasteners and to provide accurately fitted hairline joints at butted and mitered connections.
- D. Fabricate frame components **96 inches** long or shorter as one piece. Where splices are required, no individual piece may be less than **48 inches** long.

2.4 ALUMINUM FINISHES

- A. Comply with NAAMM/NOMMA AMP 500 for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- D. Color Anodic Finish: AAMA 611, AA-M12C22A34, Class II, 0.010 mm or thicker.
 - 1. Color: Dark bronze.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF ALUMINUM DOORS AND FRAMES

- A. Install aluminum frames plumb, rigid, properly aligned, and securely fastened in place in accordance with manufacturer's written instructions.

1. Use concealed installation clips to produce tightly fitted and aligned splices and connections.
 2. Secure clips to extruded main-frame components and not to snap-in or trim members.
 3. Do not leave screws or other fasteners exposed to view when installation is complete.
- B. Glass: Install glass in accordance with Section 088000 "Glazing" and aluminum-frame manufacturer's written instructions.
- C. Doors: Install doors aligned with frames and fitted with required hardware.
1. Wood Doors: Install in accordance with Section 081416 "Wood Doors" and aluminum-frame manufacturer's written instructions.
 2. Hardware: Install in accordance with Section 087100 "Door Hardware" and aluminum-frame manufacturer's written instructions.

3.3 FIELD QUALITY CONTROL

- A. Repair or remove and replace installations where testing and inspections indicate that they do not comply with specified requirements.
- B. Reinspect repaired or replaced installations to determine if replaced or repaired door assembly installations comply with specified requirements.

3.4 ADJUSTING AND CLEANING

- A. Inspect installation, correct misalignments, and tighten loose connections.
- B. Doors: Adjust doors to operate smoothly and easily, without binding or warping. Adjust hardware to function smoothly in accordance with manufacturer's written instructions.
- C. Clean exposed frame surfaces promptly after installation, using cleaning methods recommended in writing by frame manufacturer and in accordance with AAMA 609 & 610.
- D. Touch Up: Immediately after installation, repair damaged areas of aluminum finishes and touchup in accordance with manufacturer's written instructions.

END OF SECTION 081116.13

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid-core flush wood doors with plastic-laminate-faces.

B. Related Requirements:

1. Section 088000 "Glazing" for glass view panels in flush wood doors.

1.2 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Solid-core flush wood doors with plastic-laminate-faces.

B. Product Data Submittals: For each product, including the following:

1. Door core materials and construction.
2. Door edge construction
3. Door face type and characteristics.
4. Door louvers.
5. Door trim for openings.
6. Door frame construction.
7. Factory-machining criteria.
8. Factory-finishing specifications.

C. Shop Drawings: Indicate location, size, and hand of each door; elevation of each type of door; construction details not covered in Product Data; and the following:

1. Door schedule indicating door and frame location, type, size, fire protection rating, and swing.
2. Door elevations, dimension and locations of hardware, lite and louver cutouts, and glazing thicknesses.
3. Details of frame for each frame type, including dimensions and profile.
4. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
5. Dimensions and locations of blocking for hardware attachment.
6. Dimensions and locations of mortises and holes for hardware.

7. Clearances and undercuts.
8. Requirements for veneer matching.
9. Doors to be factory finished and application requirements.

D. Samples for Initial Selection: For plastic-laminate door faces.

E. Samples for Verification:

1. Plastic laminate, 6 inches square, for each color, texture, and pattern selected.
2. Frames for light openings, 6 inches long, for each material, type, and finish required.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.
- B. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Special warranties.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Comply with requirements of referenced standard and manufacturer's written instructions.
- B. Package doors individually in plastic bags or cardboard cartons.
- C. Mark each door on top and bottom rail with opening number used on Shop Drawings.

1.7 FIELD CONDITIONS

- A. Environmental Limitations:
 1. Do not deliver or install doors until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and HVAC system is operating and maintaining temperature and relative humidity at levels designed for building occupants for the remainder of construction period.

1.8 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.
 1. Failures include, but are not limited to, the following:

- a. Delamination of veneer.
 - b. Warping (bow, cup, or twist) more than **1/4 inch** in a **42-by-84-inch** section.
 - c. Telegraphing of core construction in face veneers exceeding **0.01 inch in a 3-inch** span.
2. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain flush wood doors from single manufacturer.

2.2 FLUSH WOOD DOORS AND FRAMES, GENERAL

- A. Quality Standard: In addition to requirements specified, comply with ANSI/WDMA I.S. 1A.

2.3 SOLID-CORE FLUSH WOOD DOORS AND TRANSOM PANELS WITH PLASTIC-LAMINATE FACES

- A. Interior Doors, Solid Core with Plastic-Laminate Faces:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. VT Industries, Inc.
 - b. Forte Opening Solutions
 2. Performance Grade: ANSI/WDMA I.S. 1A Heavy Duty.
 3. ANSI/WDMA I.S. 1A Quality Grade: Premium.
 4. Plastic-Laminate Faces: High-pressure decorative laminates complying with ISO 4586-3, Grade HGS.
 5. Colors, Patterns, and Finishes: As indicated.
 6. Exposed Vertical and Top Edges: Plastic laminate that matches faces, applied before faces.
 - a. Mineral-Core Doors: At hinge stiles, provide laminated-edge construction with improved screw-holding capability and split resistance. Comply with specified requirements for exposed edges.
 - 1) Screw-Holding Capability: **475 lbf** in accordance with WDMA T.M. 10.
 7. Core for Non-Fire-Rated Doors:
 - a. ANSI A208.1, Grade LD-2 particleboard.

- 1) Provide doors with WDMA I.S. 10 structural-composite-lumber cores instead of particleboard cores for doors scheduled to receive exit devices in Section 087100 "Door Hardware."

8. Construction:

- a. Five plies, hot-pressed bonded (vertical and horizontal edging is bonded to core), with entire unit abrasive planed before faces and crossbands are applied.

2.4 LIGHT FRAMES AND LOUVERS

- A. Wood Beads for Light Openings in Wood Doors: Provide manufacturer's standard wood beads unless otherwise indicated.

1. Wood Species: Species compatible with door faces.
2. Profile: Manufacturer's standard shape.

- B. Wood Louvers: Door manufacturer's standard solid-wood louvers unless otherwise indicated.

1. Wood Species: Species compatible with door faces.
2. Profile: Flat.

2.5 FABRICATION

- A. Factory fit doors to suit frame-opening sizes indicated.

1. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.

- B. Factory machine doors for hardware that is not surface applied.

1. Locate hardware to comply with DHI-WDHS-3.
2. Comply with final hardware schedules, door frame Shop Drawings, ANSI/BHMA-156.115-W, and hardware templates.
3. Coordinate with hardware mortises in metal frames, to verify dimensions and alignment before factory machining.

- C. Openings: Factory cut and trim openings through doors.

1. Light Openings: Trim openings with moldings of material and profile indicated.
2. Glazing: Factory install glazing in doors indicated to be factory finished. Comply with applicable requirements in Section 088000 "Glazing."
3. Louvers: Factory install louvers in prepared openings.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and installed door frames, with Installer present, before hanging doors.
 - 1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
 - 2. Reject doors with defects.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Hardware: For installation, see Section 087100 "Door Hardware."
- B. Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.
- C. Job-Fitted Doors:
 - 1. Align and fit doors in frames with uniform clearances and bevels as indicated below.
 - 2. Machine doors for hardware.
 - 3. Seal edges of doors, edges of cutouts, and mortises after fitting and machining.
 - 4. Clearances:
 - a. Provide **1/8 inch** at heads, jambs, and between pairs of doors.
 - b. Provide **1/8 inch** from bottom of door to top of decorative floor finish or covering unless otherwise indicated on Drawings.
 - c. Where threshold is shown or scheduled, provide **1/4 inch** from bottom of door to top of threshold unless otherwise indicated.
 - 5. Bevel non-fire-rated doors **1/8 inch in 2 inches** at lock and hinge edges.
- D. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.
- E. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 ADJUSTING

- A. Operation: Rehang or replace doors that do not swing or operate freely.
- B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

FLUSH WOOD DOORS
SECTION 081416 - 6

END OF SECTION 081416

SECTION 083113 - ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Flush access doors with exposed flanges.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details material descriptions, dimensions of individual components and profiles, and finishes.

B. Product Schedule: For access doors and frames. Use same designations indicated on Drawings.

PART 2 - PRODUCTS

2.1 ACCESS DOORS AND FRAMES

A. Flush Access Doors with Exposed Flanges:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ACUDOR Products, Inc
 - b. Babcock-Davis
 - c. JL Industries; Activar Construction Products Group, Inc.
2. Description: Face of door flush with frame, with exposed flange and concealed hinge.
3. Locations: Wall and ceiling.
4. Door Size: As indicated.
5. Uncoated Steel Sheet for Door: Nominal 0.060 inch, 16 gage, factory finished.
6. Stainless Steel Sheet for Door: Nominal 0.062 inch, 16 gage, ASTM A480/A480M No. 4 finish.
7. Frame Material: Same material, thickness, and finish as door.
8. Latch and Lock: Cam latch, key operated.

2.2 MATERIALS

- A. Steel Plates, Shapes, and Bars: ASTM A36/A36M.
- B. Steel Sheet: Uncoated or electrolytic zinc coated, ASTM A879/A879M, with cold-rolled steel sheet substrate complying with ASTM A1008/A1008M, Commercial Steel (CS), exposed.
- C. Stainless Steel Plate, Sheet, and Strip: ASTM A240/A240M or ASTM A666, Type 304. Remove tool and die marks and stretch lines, or blend into finish.
- D. Stainless Steel Flat Bars: ASTM A666, Type 304. Remove tool and die marks and stretch lines, or blend into finish.
- E. Frame Anchors: Same material as door face.
- F. Inserts, Bolts, and Anchor Fasteners: Hot-dip galvanized steel in accordance with ASTM A153/A153M or ASTM F2329/F2329M.

2.3 FABRICATION

- A. General: Provide access door and frame assemblies manufactured as integral units ready for installation.
- B. Metal Surfaces: For metal surfaces exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.
- C. Doors and Frames: Grind exposed welds smooth and flush with adjacent surfaces. Furnish mounting holes, attachment devices and fasteners of type required to secure access doors to types of supports indicated.
- D. Latch and Lock Hardware:
 - 1. Quantity: Furnish number of latches and locks required to hold doors tightly closed.
 - 2. Keys: Furnish two keys per lock and key all locks alike.

2.4 FINISHES

- A. Comply with NAAMM/NOMMA AMP 500 for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

- D. Painted Finishes: Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.
 - 1. Factory Finished: Apply manufacturer's standard baked-enamel or powder-coat finish immediately after cleaning and pretreating, with minimum dry-film thickness of **1 mil** for topcoat.
 - a. Color: As selected by Architect from full range of industry colors.
- E. Stainless Steel Finishes:
 - 1. Surface Preparation: Remove tool and die marks and stretch lines, or blend into finish.
 - 2. Polished Finish: ASTM A480/A480M No. 4 finish. Grind and polish surfaces to produce uniform finish, free of cross scratches.
 - a. Run grain of directional finishes with long dimension of each piece.
 - b. When polishing is completed, passivate and rinse surfaces. Remove embedded foreign matter and leave surfaces chemically clean.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF ACCESS DOORS AND FRAMES

- A. Comply with manufacturer's written instructions for installing access doors and frames.

3.3 ADJUSTING

- A. Adjust doors and hardware, after installation, for proper operation.

END OF SECTION 083113

SECTION 084113 - ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Aluminum-framed entrance and storefront systems.

B. Related Requirements:

1. Section 081116.13 "Interior Aluminum Doors and Frames" for interior aluminum framing.

1.2 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Operating characteristics, electrical characteristics, and furnished accessories.

B. Shop Drawings:

1. Plans, elevations, sections, full-size details, and attachments to other work.
2. Details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.
3. Connection to and continuity with adjacent thermal, weather, air, and vapor barriers.
4. Point-to-point wiring diagrams showing the following:
 - a. Power requirements for each electrically operated door hardware.
 - b. Location and types of switches, signal device, conduit sizes, and number and size of wires.

- C. Samples for Initial Selection: Manufacturer's standard color sheets, showing full range of available colors for each type of exposed finish.

- D. Samples for Verification: Actual sample of finished products for each type of exposed finish.

1. Size: Manufacturers' standard size.

- E. Entrance Door Hardware Schedule: Prepared by or under supervision of supplier, detailing fabrication and assembly of entrance door hardware, as well as procedures and diagrams. Coordinate final entrance door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of entrance door hardware.

1.4 INFORMATIONAL SUBMITTALS

- A. Energy Performance Certificates: For aluminum-framed entrance and storefront systems, accessories, and components, from manufacturer.
 1. Basis for Certification: NFRC-certified energy performance values for each aluminum-framed entrance and storefront system.
- B. Product Test Reports: For aluminum-framed entrance and storefront systems, for tests performed by a qualified testing agency.
- C. Source Quality-Control Reports: For aluminum-framed entrance and storefront systems.
- D. Qualification Statements:
 1. For Installer.
- E. Sample Warranties: For aluminum-framed entrance and storefront systems.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For aluminum-framed entrance and storefront systems.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 1. Entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.
 1. Do not change intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If changes are proposed, submit comprehensive

explanatory data to Architect for review.

1.7 WARRANTY

- A. Special Warranty: Installer agrees to repair or replace components of aluminum-framed entrance and storefront systems that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures, including excessive deflection.
 - b. Faulty operation of installed components, including noise or vibration created by wind, thermal or structural movement.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal use.
 - 2. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain all components of aluminum-framed entrance and storefront system, including framing and accessories, from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. General Performance: Comply with performance requirements specified, as determined by testing of aluminum-framed entrance and storefront systems representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.
 - 1. Aluminum-framed entrance and storefront systems to withstand movements of supporting structure, including, but not limited to, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.
 - 2. Failure also includes the following:
 - a. Thermal stresses transferring to building structure.
 - b. Glass breakage.
 - c. Noise or vibration created by wind and thermal and structural movements.
 - d. Loosening or weakening of fasteners, attachments, and other components.
 - e. Failure of operating units.
- B. Structural Loads:
 - 1. Wind Loads: As indicated on Drawings.
 - 2. Other Design Loads: As indicated on Drawings.

- C. Deflection of Framing Members Supporting Glass: At design wind load, as follows:
1. Deflection Normal to Wall Plane: Limited to 1/175 of length of span of the framing member for lengths of up to **13 feet 6 inches** and to 1/240 of length of span of the framing member plus **1/4 inch** for lengths greater than **13 feet 6 inches**.
 2. Deflection Parallel to Glazing Plane: Limited to amount not exceeding that which reduces glazing bite to less than 75 percent of design dimension and that which reduces edge clearance between framing members and glazing or other fixed components to less than **1/8 inch**.
 - a. Operable Units: Provide a minimum **1/16-inch** clearance between framing members and operable units.
- D. Structural: Test in accordance with ASTM E330/E330M as follows:
1. When tested at positive and negative wind-load design pressures, storefront assemblies, including entrance doors, do not evidence deflection exceeding specified limits.
 2. When tested at 150 percent of positive and negative wind-load design pressures, storefront assemblies, including entrance doors and anchorage, do not evidence material failures, structural distress, or permanent deformation of main framing members exceeding 0.2 percent of span.
 3. Test Durations: As required by design wind velocity, but not less than 10 seconds.
- E. Water Penetration under Static Pressure: Test in accordance with ASTM E331 as follows:
1. No evidence of water penetration through fixed glazing and framing areas, including entrance doors, when tested in accordance with a minimum static-air-pressure differential of 20 percent of positive wind-load design pressure, but not less than **6.24 lbf/sq. ft.**
- F. Seismic Performance: Aluminum-framed entrance and storefront systems to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.
1. Seismic Drift Causing Glass Fallout: Complying with criteria for passing based on building occupancy type when tested in accordance with AAMA 501.6 at design displacement and 1.5 times the design displacement.
- G. Energy Performance: Certified and labeled by manufacturer for energy performance as follows:
1. Thermal Transmittance (U-factor):
 - a. Fixed Glazing and Framing Areas: U-factor for the system of not more than **0.41 Btu/sq. ft. x h x deg F** as determined in accordance with NFRC 100.
 - b. Entrance Doors: U-factor of not more than 0.45 Btu/sq. ft. x h x deg F as determined in accordance with NFRC 100.
 2. Solar Heat-Gain Coefficient (SHGC):

- a. Fixed Glazing and Framing Areas: SHGC for the system of not more than 0.26 as determined in accordance with NFRC 200.
 - b. Entrance Doors: SHGC of not more than 0.22 as determined in accordance with NFRC 200.
3. Air Leakage:
 - a. Fixed Glazing and Framing Areas: Air leakage for the system of not more than 0.06 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft. when tested in accordance with ASTM E283.
 - b. Entrance Doors: Air leakage of not more than 1.0 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft..
4. Condensation Resistance Factor (CRF):
 - a. Fixed Glazing and Framing Areas: CRF for the system of not less than 35 as determined in accordance with AAMA 1503.
 - b. Entrance Doors: CRF of not less than 57 as determined in accordance with AAMA 1503.
- H. Noise Reduction: Test in accordance with ASTM E90, with ratings determined by ASTM E1332, as follows.
 1. Outdoor-Indoor Transmission Class: Minimum 26.
- I. Thermal Movements: Allow for thermal movements resulting from ambient and surface temperature changes.
 1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.3 ALUMINUM-FRAMED ENTRANCE AND STOREFRONT SYSTEMS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 1. Arcadia Inc.
 2. Kawneer Company, Inc.; Arconic Corporation
 3. OldCastle BuildingEnvelope (OBE)
 4. U.S. Aluminum; C.R. Laurence Co., Inc.; CRH Americas, Inc.
- B. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads.
 1. Exterior Framing Construction: Match existing.
 2. Glazing System: Retained mechanically with gaskets on four sides.
 3. Glazing Plane: Match existing.
 4. Finish: Color anodic finish.
 5. Fabrication Method: Field-fabricated stick system.
 6. Aluminum: Alloy and temper recommended by manufacturer for type of use and

finish indicated.

7. Steel Reinforcement: As required by manufacturer.

- C. Backer Plates: Manufacturer's standard, continuous backer plates for framing members, if not integral, where framing abuts adjacent construction.
- D. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.
- E. Entrance Doors: Manufacturer's standard glazed entrance doors for manual-swing or automatic operation.
 - 1. Door Construction: 1-3/4-inch overall thickness, with minimum 0.125-inch- thick, extruded-aluminum tubular rail and stile members. Mechanically fasten corners with reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.
 - 2. Door Design: As indicated.
 - 3. Finish: Match adjacent storefront framing finish.

2.4 ENTRANCE DOOR HARDWARE

- A. Entrance Door Hardware: Hardware not specified in this Section is specified in Section 087100 "Door Hardware."
- B. General: Provide entrance door hardware and entrance door hardware sets indicated in door and frame schedule for each entrance door, to comply with requirements in this Section.
 - 1. Entrance Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and products complying with BHMA standard referenced.
 - 2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
 - 3. Opening-Force Requirements:
 - a. Egress Doors: Not more than 15 lbf to release the latch and not more than 30 lbf to set the door in motion and not more than 15 lbf to open the door to its minimum required width.
 - b. Accessible Interior Doors: Not more than 5 lbf to fully open door.
- C. Designations: Requirements for design, grade, function, finish, quantity, size, and other distinctive qualities of each type of entrance door hardware are indicated in "Entrance Door Hardware Sets" Article. Products are identified by using entrance door hardware designations as follows:
 - 1. References to BHMA Standards: Provide products complying with these standards and requirements for description, quality, and function.
- D. Pivot Hinges: BHMA A156.4, Grade 1.
 - 1. Offset-Pivot Hinges: Provide top, bottom, and intermediate offset pivots at each

door leaf.

- E. Butt Hinges: BHMA A156.1, Grade 1, radius corner.
 - 1. Nonremovable Pins: Provide setscrew in hinge barrel that, when tightened into a groove in hinge pin, prevents removal of pin while entrance door is closed.
 - 2. Exterior Hinges: Stainless steel, with stainless steel pin.
 - 3. Quantities:
 - a. For doors up to 87 inches high, provide three hinges per leaf.
 - b. For doors more than 87 and up to 120 inches high, provide four hinges per leaf.
- F. Continuous-Gear Hinges: BHMA A156.26.
- G. Mortise Auxiliary Locks: BHMA A156.5, Grade 1.
- H. Panic Exit Devices: BHMA A156.3, Grade 1, listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing in accordance with UL 305.
- I. Cylinders:
 - 1. As specified in Section 087100 "Door Hardware."
- J. Strikes: Provide strike with black-plastic dust box for each latch or lock bolt; fabricated for aluminum framing.
- K. Operating Trim: BHMA A156.6.
- L. Closers: BHMA A156.4, Grade 1, with accessories required for a complete installation, sized as required by door size, exposure to weather, and anticipated frequency of use; adjustable to comply with field conditions and requirements for opening force.
- M. Concealed Overhead Holders and Stops: BHMA A156.8, Grade 1.
- N. Door Stops: BHMA A156.16, Grade 1, floor or wall mounted, as appropriate for door location indicated, with integral rubber bumper.
- O. Weather Stripping: Manufacturer's standard replaceable components.
 - 1. Compression Type: Made of ASTM D2000 molded neoprene or ASTM D2287 molded PVC.
 - 2. Sliding Type: AAMA 701/702, made of wool, polypropylene, or nylon woven pile with nylon-fabric or aluminum-strip backing.
- P. Weather Sweeps: Manufacturer's standard exterior-door bottom sweep with concealed fasteners on mounting strip.
- Q. Thresholds: BHMA A156.21 raised thresholds beveled with a slope of not more than 1:2, with maximum height of 1/2 inch.

2.5 GLAZING

- A. Glazing: Comply with Section 088000 "Glazing."
- B. Glazing Gaskets: Manufacturer's standard sealed-corner pressure-glazing system of black, resilient elastomeric glazing gaskets, setting blocks, and shims or spacers.
- C. Glazing Sealants: As recommended by manufacturer.

2.6 MATERIALS

- A. Sheet and Plate: [ASTM B209](#).
- B. Extruded Bars, Rods, Profiles, and Tubes: [ASTM B221](#).

2.7 ACCESSORIES

- A. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.
 - 1. Use self-locking devices where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration.
 - 2. Reinforce members as required to receive fastener threads.
 - 3. Use exposed fasteners with countersunk Phillips screw heads, finished to match framing system.
- B. Anchors: Three-way adjustable anchors with minimum adjustment of [1 inch](#) that accommodate fabrication and installation tolerances in material and finish compatible with adjoining materials and recommended by manufacturer.
- C. Concealed Flashing: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding flashing compatible with adjacent materials.
- D. Rigid PVC filler.

2.8 FABRICATION

- A. Form or extrude aluminum shapes before finishing.
- B. Fabricate components that, when assembled, have the following characteristics:
 - 1. Profiles that are sharp, straight, and free of defects or deformations.
 - 2. Accurately fitted joints with ends coped or mitered.
 - 3. Physical and thermal isolation of glazing from framing members.
 - 4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
 - 5. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.

- C. Mechanically Glazed Framing Members: Fabricate for flush glazing without projecting stops.
- D. Entrance Door Frames: Reinforce as required to support loads imposed by door operation and for installing entrance door hardware.
 - 1. At interior and exterior doors, provide compression weather stripping at fixed stops.
- E. Entrance Doors: Reinforce doors as required for installing entrance door hardware.
 - 1. At pairs of exterior doors, provide sliding-type weather stripping retained in adjustable strip and mortised into door edge.
 - 2. At exterior doors, provide weather sweeps applied to door bottoms.
- F. Entrance Door Hardware Installation: Factory install entrance door hardware to the greatest extent possible. Cut, drill, and tap for factory-installed entrance door hardware before applying finishes.
- G. After fabrication, clearly mark components to identify their locations in Project in accordance with Shop Drawings.

2.9 ALUMINUM FINISHES

- A. Color Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.
 - 1. Color: Match existing.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF ALUMINUM-FRAMED ENTRANCE AND STOREFRONT SYSTEMS

- A. Comply with manufacturer's written instructions.
- B. Do not install damaged components.
- C. Fit joints to produce hairline joints free of burrs and distortion.
- D. Rigidly secure nonmovement joints.

- E. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.
- F. Seal perimeter and other joints watertight unless otherwise indicated.
- G. Metal Protection:
 - 1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with materials recommended by manufacturer for this purpose or by installing nonconductive spacers.
 - 2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.
- H. Set continuous sill members and flashing in full sealant bed, as specified in Section 079200 "Joint Sealants," to produce weathertight installation.
- I. Install joint filler behind sealant as recommended by sealant manufacturer.
- J. Install components plumb and true in alignment with established lines and grades.
- K. Install operable units level and plumb, securely anchored, and without distortion. Adjust weather-stripping contact and hardware movement to produce proper operation.
- L. Install entrance doors to produce smooth operation and tight fit at contact points.
 - 1. Exterior Doors: Install to produce weathertight enclosure and tight fit at weather stripping.
 - 2. Field-Installed Entrance Door Hardware: Install surface-mounted entrance door hardware in accordance with entrance door hardware manufacturers' written instructions using concealed fasteners to greatest extent possible.
- M. Install glazing as specified in Section 088000 "Glazing."
- N. Install structural glazing as follows:
 - 1. Prepare surfaces that will contact structural sealant in accordance with sealant manufacturer's written instructions, to ensure compatibility and adhesion. Preparation includes, but is not limited to, cleaning and priming surfaces.
 - 2. Set glazing into framing in accordance with sealant manufacturer and framing manufacturer's written instructions and standard practice. Use a spacer or backer as recommended by manufacturer.
 - 3. Set glazing with proper orientation so that coatings face exterior or interior as specified.
 - 4. Hold glazing in place using temporary retainers of type and spacing recommended by manufacturer, until structural sealant joint has cured.
 - 5. Apply structural sealant to completely fill cavity, in accordance with sealant manufacturer and framing manufacturer's written instructions and in compliance with local codes.
 - 6. Apply structural sealant at temperatures indicated by sealant manufacturer for type of sealant.
 - 7. Allow structural sealant to cure in accordance with manufacturer's written

instructions.

8. Clean and protect glass as indicated in Section 088000 "Glazing."
9. After structural sealant has completely cured, remove temporary retainers and insert backer rod between lites of glass as recommended by sealant manufacturer.
10. Install weatherseal sealant to completely fill cavity, in accordance with sealant manufacturer's written instructions, to produce weatherproof joints.

3.3 ERECTION TOLERANCES

- A. Install aluminum-framed entrance and storefront systems to comply with the following maximum tolerances:

1. Plumb: **1/8 inch in 10 feet; 1/4 inch in 40 feet.**
2. Level: **1/8 inch in 20 feet; 1/4 inch in 40 feet.**
3. Alignment:
 - a. Where surfaces abut in line or are separated by reveal or protruding element up to **1/2 inch** wide, limit offset from true alignment to **1/16 inch**.
 - b. Where surfaces are separated by reveal or protruding element from **1/2 to 1 inch** wide, limit offset from true alignment to **1/8 inch**.
 - c. Where surfaces are separated by reveal or protruding element of **1 inch** wide or more, limit offset from true alignment to **1/4 inch**.
4. Location: Limit variation from plane to **1/8 inch in 12 feet; 1/2 inch** over total length.

3.4 MAINTENANCE SERVICE

- A. Entrance Door Hardware Maintenance:

1. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of entrance door hardware.
2. Initial Maintenance Service: Beginning at Substantial Completion, provide six months' full maintenance by skilled employees of entrance door hardware Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper entrance door hardware operation at rated speed and capacity. Use parts and supplies that are the same as those used in the manufacture and installation of original equipment.

END OF SECTION 084113

SECTION 087100 - DOOR HARDWARE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hinges.
2. Bored locks.
3. Electric strikes.
4. Manual flush bolts.
5. Exit devices and auxiliary items.
6. Lock cylinders.
7. Surface closers.
8. Wall- and floor-mounted stops.
9. Thresholds.
10. Metal protective trim units.

B. Related Requirements:

1. Section 064116 "Plastic-Laminate-Clad Architectural Cabinets" for cabinet door hardware provided with cabinets.
2. Section 083113 "Access Doors and Frames" for access door hardware, except cylinders.
3. Section 084113 "Aluminum-Framed Entrances and Storefronts" for entrance door hardware, except cylinders.

1.2 COORDINATION

- A. Installation Templates: Distribute for doors, frames, and other work specified to be factory prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- B. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.
- C. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.
- D. Existing Openings: Where hardware components are scheduled for application to existing construction or where modifications to existing door hardware are required, field-verify existing conditions and coordinate installation of door hardware to suit opening conditions and to provide proper door operation.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Conference participants must include Installer's Architectural Hardware Consultant and Owner's security consultant.
- B. Keying Conference: Conduct conference at Project site.
 - 1. Conference participants must include Installer's Architectural Hardware Consultant and Owner's security consultant.
 - 2. Incorporate conference decisions into keying schedule after reviewing door hardware keying system, including, but not limited to, the following:
 - a. Flow of traffic and degree of security required.
 - b. Preliminary key system schematic diagram.
 - c. Requirements for key control system.
 - d. Requirements for access control.
 - e. Address for delivery of keys.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Shop Drawings: For electrified door hardware.
 - 1. Include diagrams for power, signal, and control wiring.
 - 2. Include details of interface of electrified door hardware and building safety and security systems.
- C. Samples: For each exposed product in each finish specified, in manufacturer's standard size.
 - 1. Tag Samples with full product description to coordinate Samples with door hardware schedule.
- D. Samples for Initial Selection: For each type of exposed finish.
- E. Samples for Verification: For each type of exposed product, in each finish specified.
 - 1. Sample Size: Full-size units or minimum **2-by-4-inch** Samples for sheet and **4-inch** long Samples for other products.
 - a. Full-size Samples will be returned to Contractor. Units that are acceptable and remain undamaged through submittal, review, and field comparison process may, after final check of operation, be incorporated into the Work, within limitations of keying requirements.

2. Tag Samples with full product description to coordinate Samples with door hardware schedule.
- F. Door Hardware Schedule: Prepared by or under the supervision of Installer's Architectural Hardware Consultant. Coordinate door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
1. Submittal Sequence: Submit door hardware schedule concurrent with submissions of product data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate the fabrication of other work that is critical in Project construction schedule.
 2. Format: Use same scheduling sequence and format and use same door numbers as in door hardware schedule in the Contract Documents.
 3. Content: Include the following information:
 - a. Identification number, location, hand, fire rating, size, and material of each door and frame.
 - b. Locations of each door hardware set, cross-referenced to Drawings on floor plans and to door and frame schedule.
 - c. Complete designations, including name and manufacturer, type, style, function, size, quantity, function, and finish of each door hardware product.
 - d. Description of electrified door hardware sequences of operation and interfaces with other building control systems.
 - e. Fastenings and other installation information.
 - f. Explanation of abbreviations, symbols, and designations contained in door hardware schedule.
 - g. Mounting locations for door hardware.
 - h. List of related door devices specified in other Sections for each door and frame.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of door hardware to include in maintenance manuals.
- B. Schedules: Final door hardware schedule.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Supplier of products and an employer of workers trained and approved by product manufacturers and of an Architectural Hardware Consultant who is available during the course of the Work to consult Contractor, Architect, and Owner about door hardware and keying.
 1. Warehousing Facilities: In Project's vicinity.
 2. Scheduling Responsibility: Preparation of door hardware and keying schedule.
 3. Engineering Responsibility: Preparation of data for electrified door hardware, including Shop Drawings, based on testing and engineering analysis of

manufacturer's standard units in assemblies similar to those indicated for this Project.

- B. Architectural Hardware Consultant Qualifications: A person who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project an Architectural Hardware Consultant (AHC) and an Electrified Hardware Consultant (EHC).

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lockup for door hardware delivered to Project site.
- B. Tag each item or package separately with identification coordinated with the final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package.
- C. Deliver keys to manufacturer of key control system for subsequent delivery to Owner.

1.8 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures, including excessive deflection, cracking, or breakage.
 - b. Faulty operation of doors and door hardware.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.
 - 2. Warranty Period: Three years from date of Substantial Completion unless otherwise indicated below:
 - a. Exit Devices: Two years from date of Substantial Completion.
 - b. Manual Closers: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain each type of door hardware from single manufacturer.
 - 1. Provide electrified door hardware from same manufacturer as mechanical door hardware unless otherwise indicated. Manufacturers that perform electrical modifications and that are listed by a testing and inspecting agency acceptable to authorities having jurisdiction are acceptable.

2.2 PERFORMANCE REQUIREMENTS

- A. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Means of Egress Doors: Latches do not require more than **15 lbf** to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.
- C. Accessibility Requirements: For door hardware on doors in an accessible route, comply with the ABA standards of the Federal agency having jurisdiction and the latest version of California Building Code, Title 24, Part 2.
 - 1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than **5 lbf**.
 - 2. Comply with the following maximum opening-force requirements:
 - a. Interior, Non-Fire-Rated Hinged Doors: **5 lbf** applied perpendicular to door.
 - 3. Bevel raised thresholds with a slope of not more than 1:2. Provide thresholds not more than **1/2 inch** high.
 - 4. Adjust door closer sweep periods so that, from an open position of 90 degrees, the door will take at least 5 seconds to move to a position of 12 degrees from the latch.
 - 5. Adjust spring hinges so that, from an open position of 70 degrees, the door will take at least 1.5 seconds to move to the closed position.

2.3 HINGES

- A. Hinges: ANSI/BHMA A156.1.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Hager Companies; BB1191 Five Knuckle Ball Bearing; Standard Weight or comparable product by one of the following:
 - a. Allegion plc
 - b. Don-Jo Mfg., Inc
 - c. STANLEY; dormakaba USA, Inc.

2.4 MECHANICAL LOCKS AND LATCHES

- A. Lock Functions: As indicated in door hardware schedule.
- B. Lock Throw: Comply with testing requirements for length of bolts required for labeled fire doors, and as follows:
 - 1. Bored Locks: Minimum **1/2-inch** latchbolt throw.
 - 2. Mortise Locks: Minimum **3/4-inch** latchbolt throw.
 - 3. Deadbolts: Minimum **1-inch** bolt throw.
- C. Lock Backset: **2-3/4 inches** unless otherwise indicated.

D. Lock Trim:

1. Description: As indicated on Drawings.
2. Levers: Cast.
3. Escutcheons (Roses): Wrought.
4. Dummy Trim: Match lever lock trim and escutcheons.

E. Strikes: Provide manufacturer's standard strike for each lock bolt or latchbolt complying with requirements indicated for applicable lock or latch and with strike box and curved lip extended to protect frame; finished to match lock or latch.

F. Bored Locks: ANSI/BHMA A156.2, Grade 1 or Grade 2, Series 4000.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Schlage; ND or ALX Series; Rhodes (RHO) Lever or comparable product by one of the following:
 - a. Allegion plc
 - b. Hager Companies

2.5 ELECTRIC STRIKES

A. Electric Strikes: ANSI/BHMA A156.31, Grade 2; with faceplate to suit lock and frame.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Adams Rite Manufacturing Company, an ASSA ABLOY Group company
 - b. Allegion plc
 - c. Hager Companies
 - d. Hanchett Entry Systems (HES), Inc.; ASSA ABLOY Group

2.6 MANUAL FLUSH BOLTS

A. Manual Flush Bolts: ANSI/BHMA A156.16; minimum **3/4-inch** throw; designed for mortising into door edge.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Allegion plc
 - b. Don-Jo Mfg., Inc
 - c. Trimco

2.7 EXIT DEVICES AND AUXILIARY ITEMS

A. Exit Devices and Auxiliary Items: ANSI/BHMA A156.3.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Von Duprin 98/99 or comparable product by one of the following:
 - a. Adams Rite Manufacturing Company, an ASSA ABLOY Group company
 - b. Allegion plc
 - c. dormakaba USA Inc.
 - d. Hager Companies

2.8 LOCK CYLINDERS

- A. Lock Cylinders: Tumbler type, constructed from brass or bronze, stainless steel, or nickel silver. Provide cylinder from same manufacturer of locking devices.
- B. Standard Lock Cylinders: ANSI/BHMA A156.5, Grade 2 permanent cores; face finished to match lockset.
 1. Core Type: Interchangeable.

2.9 KEYING

- A. Keying System: Factory registered, complying with guidelines in ANSI/BHMA A156.28, appendix. Provide one extra key blank for each lock. Incorporate decisions made in keying conference.
 1. Existing System:
 - a. Master key or grand master key locks to Owner's existing system.
 - b. Re-key Owner's existing master key system into new keying system.
- B. Keys: Brass.
 1. Stamping: Permanently inscribe each key with a visual key control number and include the following notation:
 - a. Notation: Information to be furnished by Owner.

2.10 SURFACE CLOSERS

- A. Surface Closers: ANSI/BHMA A156.4; rack-and-pinion hydraulic type with adjustable sweep and latch speeds controlled by key-operated valves and forged-steel main arm. Comply with manufacturer's written instructions for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.
 1. Basis-of-Design Product: Subject to compliance with requirements, provide Norton 7500 Series or comparable product by one of the following:
 - a. Allegion plc
 - b. dormakaba USA Inc.

- c. Hager Companies
- d. Norton Door Controls; ASSA ABLOY

2.11 MECHANICAL STOPS AND HOLDERS

A. Wall- and Floor-Mounted Stops: ANSI/BHMA A156.16.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Trimco 1270 WV Wall Bumper, Wrought, Concave or comparable product by one of the following:
 - a. Allegion plc
 - b. Don-Jo Mfg., Inc
 - c. Hager Companies
 - d. Trimco

2.12 DOOR GASKETING

A. Maximum Air Leakage: When tested in accordance with ASTM E283/E283M with tested pressure differential of **0.3 inch wg**, as follows:

1. Smoke-Rated Gasketing: **0.3 cfm/sq. ft.** of door opening.
2. Gasketing on Single Doors: **0.3 cfm/sq. ft.** of door opening.
3. Gasketing on Double Doors: **0.50 cfm per ft.** of door opening.

2.13 THRESHOLDS

A. Thresholds: ANSI/BHMA A156.21; fabricated to full width of opening indicated.

1. Basis-of-Design Product: Subject to compliance with requirements, provide PEMKO 154 Series Commercial Flat Saddle Threshold or comparable product by one of the following:
 - a. Hager Companies
 - b. National Guard Products, Inc
 - c. Pemko Manufacturing Company Inc.; ASSA ABLOY Accessories and Door Controls Group, Inc.; ASSA ABLOY

2.14 METAL PROTECTIVE TRIM UNITS

A. Metal Protective Trim Units: ANSI/BHMA A156.6; fabricated from **0.050-inch-** thick stainless steel; with manufacturer's standard machine or self-tapping screw fasteners.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Allegion plc

- b. Don-Jo Mfg., Inc
- c. Hager Companies
- d. Trimco

2. Basis-of-Design Products:

- a. Ives 8200 Push Plate
- b. Ives 8302 Pull Plate
- c. Ives 8400 Kick Plate - 34" wide by 12" high

2.15 FABRICATION

- A. Base Metals: Produce door hardware units of base metal indicated, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and ANSI/BHMA A156.18.
- B. Fasteners: Provide door hardware manufactured to comply with published templates prepared for machine, wood, and sheet metal screws. Provide screws that comply with commercially recognized industry standards for application intended; however, aluminum fasteners are not permitted. Provide Phillips flat-head screws with finished heads to match surface of door hardware unless otherwise indicated.
 - 1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.

2.16 FINISHES

- A. Provide finishes complying with ANSI/BHMA A156.18 as indicated in door hardware schedule.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance of the Work.
- B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Steel Doors and Frames: For surface-applied door hardware, drill and tap doors and frames in accordance with ANSI/SDI A250.6.
- B. Wood Doors: Comply with door and hardware manufacturers' written instructions.

3.3 INSTALLATION OF DOOR HARDWARE

- A. Mounting Heights: Mount door hardware units at heights indicated on Drawings unless otherwise indicated or required to comply with governing regulations.
- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work. Do not install surface-mounted items until finishes have been completed on substrates involved.
 - 1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
 - 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors in accordance with industry standards.
- C. Hinges: Install types and in quantities indicated in door hardware schedule, but not fewer than the number recommended by manufacturer for application indicated or one hinge for every **30 inches** of door height, whichever is more stringent, unless other equivalent means of support for door, such as spring hinges or pivots, are provided.
- D. Intermediate Offset Pivots: Where offset pivots are indicated, provide intermediate offset pivots in quantities indicated in door hardware schedule, but not fewer than one intermediate offset pivot per door and one additional intermediate offset pivot for every **30 inches** of door height greater than **90 inches**.
- E. Lock Cylinders: Install construction cores to secure building and areas during construction period.

1. Replace construction cores with permanent cores as directed by Owner.
- F. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings. Verify location with Architect.
 1. Configuration: Provide one power supply for each door opening with electrified door hardware.
- G. Thresholds: Set thresholds for exterior doors and other doors indicated in full bed of sealant complying with requirements specified in Section 079200 "Joint Sealants."
- H. Stops: Provide wall stops for doors unless floor or other type stops are indicated in door hardware schedule. Do not mount floor stops where they will impede traffic.
- I. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
 1. Do not notch perimeter gasketing to install other surface-applied hardware.
- J. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
- K. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.

3.4 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.
 2. Spring Hinges: Adjust to achieve positive latching when door is allowed to close freely from an open position of 70 degrees and so that closing time complies with accessibility requirements of authorities having jurisdiction.
 3. Electric Strikes: Adjust horizontal and vertical alignment of keeper to properly engage lock bolt.

3.5 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure that door hardware is without damage or deterioration at time of Substantial Completion.

3.6 MAINTENANCE SERVICE

- A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions for Owner's continued adjustment, maintenance, and removal and replacement of door hardware.

3.7 DEMONSTRATION

- A. Engage Installer to train Owner's maintenance personnel to adjust, operate, and maintain door hardware.

END OF SECTION 087100

SECTION 088000 - GLAZING

PART 1 - GENERAL

1.1 SUMMARY

A. Related Requirements:

1. Section 088300 "Mirrors."

1.2 DEFINITIONS

- A. Glass Manufacturers: Firms that produce primary glass, fabricated glass, or both, as defined in referenced glazing publications.
- B. Glass Thicknesses: Indicated by thickness designations in millimeters in accordance with ASTM C1036.
- C. IBC: International Building Code.
- D. Interspace: Space between lites of an insulating-glass unit.

1.3 COORDINATION

- A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances to achieve proper safety margins for glazing retention under each design load case, load case combination, and service condition.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 - 2. Review temporary protection requirements for glazing during and after installation.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Glass Samples: For each type of the following products; **12 inches** square.

1. Coated glass.
2. Insulating glass.
3. Spandrel glass.

- C. Glazing Accessory Samples: For sealants, in **12-inch** lengths.
- D. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Product Certificates: For glass.
- C. Product Test Reports: For glazing sealants, for tests performed by a qualified testing agency.
1. For glazing sealants, provide test reports based on testing current sealant formulations within previous 36-month period.
- D. Preconstruction adhesion and compatibility test report.
- E. Sample Warranties: For special warranties.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified glazing contractor for this Project who is certified under the North American Contractor Certification Program (NACC) for Architectural Glass & Metal (AG&M) contractors.
- B. Sealant Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021 to conduct the testing indicated.

1.8 PRECONSTRUCTION TESTING

- A. Preconstruction Adhesion and Compatibility Testing: Test each glass product, tape sealant, gasket, glazing accessory, and glass-framing member for adhesion to and compatibility with elastomeric glazing sealants.
1. Testing is not required if data are submitted based on previous testing of current sealant products and glazing materials matching those submitted.
 2. Use ASTM C1087 to determine whether priming and other specific joint-preparation techniques are required to obtain rapid, optimum adhesion of glazing sealants to glass, tape sealants, gaskets, and glazing channel substrates.
 3. Test no fewer than eight Samples of each type of material, including joint substrates, shims, sealant backings, secondary seals, and miscellaneous materials.
 4. Schedule enough time for testing and analyzing results to prevent delaying the

Work.

5. For materials failing tests, submit sealant manufacturer's written instructions for corrective measures including use of specially formulated primers.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Protect glazing materials in accordance with manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.

1.10 FIELD CONDITIONS

- A. Environmental Limitations: Do not proceed with glazing when ambient and substrate temperature conditions are outside limits permitted by glazing material manufacturers and when glazing channel substrates are wet from rain, frost, condensation, or other causes.
 1. Do not install glazing sealants when ambient and substrate temperature conditions are outside limits permitted by sealant manufacturer or are below **40 deg F**.

1.11 WARRANTY

- A. Manufacturer's Special Warranty for Insulating Glass: Manufacturer agrees to replace insulating-glass units that deteriorate within specified warranty period. Deterioration of insulating glass is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating glass contrary to manufacturer's written instructions. Evidence of failure is obstruction of vision by dust, moisture, or film on interior surfaces of glass.
 1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Source Limitations for Glass: Obtain glass from single source from single manufacturer.
- B. Source Limitations for Glazing Accessories: For each product and installation method, obtain from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. General: Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage

attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.

- B. Structural Performance: Glazing shall withstand the following design loads within limits and under conditions indicated determined in accordance with the IBC and ASTM E1300:
 - 1. Design Wind Pressures: As indicated on Drawings.
 - a. Wind Design Data: As indicated on Drawings.
- C. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.
- D. Thermal and Optical Performance Properties: Provide glass with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below:
 - 1. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.
 - 2. U-Factors: Center-of-glazing values, in accordance with NFRC 100 and based on most current non-beta version of LBL's WINDOW computer program, expressed as **Btu/sq. ft. x h x deg F**.
 - 3. SHGC and Visible Transmittance: Center-of-glazing values, in accordance with NFRC 200 and based on most current non-beta version of LBL's WINDOW computer program.
 - 4. Visible Reflectance: Center-of-glazing values, in accordance with NFRC 300.

2.3 GLASS PRODUCTS, GENERAL

- A. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.
 - 1. NGA Publications: "Glazing Manual."
 - 2. IGMA Publication for Insulating Glass: SIGMA TM-3000, "North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use."
- B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of manufacturer. Label shall indicate manufacturer's name, type of glass, thickness, and safety glazing standard with which glass complies.
- C. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass that complies with performance requirements and is not less than thickness indicated.

2.4 GLASS PRODUCTS

- A. Fully Tempered Float Glass: ASTM C1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

2.5 INSULATING GLASS

- A. Insulating-Glass Units: Factory-assembled units consisting of sealed lites of glass separated by a dehydrated interspace, qualified in accordance with ASTM E2190.
 - 1. Sealing System: Dual seal, with manufacturer's standard primary and secondary sealants.

2.6 GLAZING SEALANTS

- A. General:
 - 1. Compatibility: Compatible with one another and with other materials they contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
 - 2. Suitability: Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.
 - 3. Colors of Exposed Glazing Sealants: As indicated by manufacturer's designations.

2.7 GLAZING TAPES

- A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C1281 and AAMA 800 for products indicated below:
 - 1. AAMA 804.3 tape, where indicated.

2.8 MISCELLANEOUS GLAZING MATERIALS

- A. General: Provide products of material, size, and shape complying with referenced glazing standard, recommended in writing by manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.
- B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.

C. Setting Blocks:

1. EPDM with Shore A durometer hardness of 85, plus or minus 5.
2. Type recommended in writing by sealant or glass manufacturer.

D. Spacers:

1. Neoprene blocks or continuous extrusions of hardness required by glass manufacturer to maintain glass lites in place for installation indicated.
2. Type recommended in writing by sealant or glass manufacturer.

E. Edge Blocks:

1. EPDM with Shore A durometer hardness per manufacturer's written instructions.
2. Type recommended in writing by sealant or glass manufacturer.

F. Cylindrical Glazing Sealant Backing: ASTM C1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

2.9 FABRICATION OF GLAZING UNITS

A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing publications, to comply with system performance requirements.

1. Allow for thermal movements from ambient and surface temperature changes acting on glass framing members and glazing components.
 - a. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.

C. Grind smooth and polish exposed glass edges and corners.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:

1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
2. Presence and functioning of weep systems.
3. Minimum required face and edge clearances.
4. Effective sealing between joints of glass-framing members.

- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.
- B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.

3.3 GLAZING, GENERAL

- A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.
- B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.
- C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.
- D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Provide spacers for glass lites where length plus width is larger than **50 inches**.
 - 1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
 - 2. Provide **1/8-inch** minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.
- G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and in accordance with requirements in referenced glazing publications.
- H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.

- I. Set glass lites with proper orientation so that coatings face exterior or interior as specified.

3.4 TAPE GLAZING

- A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.
- B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.
- C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.
- D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.
- E. Do not remove release paper from tape until right before each glazing unit is installed.
- F. Apply heel bead of elastomeric sealant.
- G. Center glass lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.
- H. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.5 GASKET GLAZING (DRY)

- A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.
- B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.
- C. Installation with Drive-in Wedge Gaskets: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.
- D. Installation with Pressure-Glazing Stops: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.

- E. Install gaskets so they protrude past face of glazing stops.

3.6 SEALANT GLAZING (WET)

- A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.
- B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.
- C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.7 CLEANING AND PROTECTION

- A. Immediately after installation, remove nonpermanent labels and clean surfaces.
- B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.
 - 1. If, despite such protection, contaminating substances do contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.
- C. Remove and replace glass that is damaged during construction period.
- D. Wash glass on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

END OF SECTION 088000

SECTION 088113 - DECORATIVE GLASS GLAZING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Patterned glass.
2. Acid-etched glass.
3. Sandblasted glass.
4. Glass with decorative film overlay.

B. Related Requirements:

1. Section 088300 "Mirrors" for mirror glass.

1.2 DEFINITION

- A. Glass Thickness: Indicated by thickness designations in millimeters in accordance with ASTM C1036.

1.3 COORDINATION

- A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review temporary protection requirements for glazing during and after installation.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- B. Shop Drawings: For decorative glass. Show fabrication and installation details. Include the following:

1. Size and location of penetrations.
2. Glazing method.
3. Mounting method.
4. Attachments to other work.
5. Full-size details of edge-finished profiles.

C. Glass Samples: For the following products, **12 inches** square:

1. Each type of decorative glass.
2. Each edge treatment on type of decorative glass.
3. Each decorative film overlay on type of decorative glass.
4. Each applied coating on type of decorative glass.

D. Glazing Accessory Samples: For sealants, in **12-inch** lengths. Install sealant Samples between two strips of material representative of the glazed system.

E. Decorative Glazing Schedule: List decorative glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Product Certificates: For each type of decorative glass.
- C. Preconstruction adhesion and compatibility test report.
- D. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of decorative glass to include in maintenance manuals.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs glass installers for this Project who are certified under NGA's Certified Glass Installer Program.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Protect decorative glass and glazing materials according to manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.
- B. Retain packaging and sequencing numbers for decorative glass units.

1.10 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install decorative glass until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.
- B. Field Measurements: Verify actual dimensions of openings and construction contiguous with decorative glass by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 DECORATIVE GLASS GLAZING

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Bendheim, LTD
 - 2. GGI; General Glass International
- B. Source Limitations for Glass: Obtain each type of decorative glass from single source from single manufacturer.
- C. Source Limitations for Glazing Accessories: Obtain from single source from single manufacturer, for each product and installation method.

2.2 PERFORMANCE REQUIREMENTS

- A. General Performance: Installed glazing systems shall withstand normal thermal movement and impact loads (where applicable) without failure, including loss or glass breakage attributable to the following: defective manufacture, fabrication, or installation; deterioration of glazing materials; or other defects in construction.
- B. Structural Performance: Decorative glass installed adjacent to walking surfaces shall withstand the following design loads within limits and under conditions indicated:
 - 1. Differential deflection of adjacent unsupported edges shall not exceed glass thickness when subjected to 50 lbf/ft. applied horizontally to one panel at any point up to 42 inches above the adjacent walking surface.
 - 2. Base design on thickness at thinnest part of the glass.
- C. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.

2.3 GLASS PRODUCTS, GENERAL

- A. Glazing Publications: Comply with glass product manufacturers' written instructions

and NGA's "GANA Glazing Manual" unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.

- B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of manufacturer. Label shall indicate manufacturer's name, type of glass, thickness, and safety glazing standard with which glass complies.
- C. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass lites in thicknesses as needed to comply with requirements indicated.
- D. Strength: Where annealed float glass is indicated, provide annealed float glass, heat-strengthened float glass, or fully tempered float glass as needed to comply with requirements indicated. Where heat-strengthened glass is indicated, provide heat-strengthened float glass or fully tempered float glass as needed to comply with requirements indicated. Where fully tempered glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

- A. Clear Annealed Float Glass: ASTM C1036, Type I, Class 1 (clear), Quality-Q3.
- B. Fully Tempered Glass: ASTM C1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.
- C. Patterned Glass: ASTM C1036, Type II, Class 1 (clear) or Class 2 (tinted) as indicated, Form 3; finish, pattern, and quality as indicated.
- D. Tempered Patterned Glass: ASTM C1048, Kind FT (fully tempered), Type II, Class 1 (clear) or Class 2 (tinted) as indicated, Form 3; finish, pattern, and quality as indicated.

2.5 GLAZING MATERIALS

- A. Glazing Sealants, Tapes, and Miscellaneous Glazing Materials: As specified in Section 088000 "Glazing."
 - 1. Colors: As selected by Architect from manufacturer's full range.

2.6 HARDWARE FOR GLASS INSTALLATION

- A. Fasteners: Fabricated of same basic metal and alloy as fastened metal and matching it in finished color and texture where fasteners are exposed.
- B. Gaskets: Manufacturer's standard, compatible with decorative glass type indicated.

2.7 DECORATIVE GLASS FABRICATION

- A. Fabricate decorative glass and provide other glazing products in sizes required to glaze openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with product manufacturer's written instructions and with referenced glazing standard.
- B. Edge Finishing: Finish edges smooth and polished, without chips, scratches, or warps.
- C. Decorative Film Overlay Application: Apply squarely aligned to glass edges, uniformly smooth, and free from tears, air bubbles, wrinkles, and rough edges, in single sheet completely overlaying the back face of clean glass, according to manufacturer's written instructions, including surface preparation and application temperature limitations.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine decorative glass framing members, with Installer present, for compliance with the following:
 - 1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
 - 2. Minimum required face or edge clearances.
 - 3. Effective sealing between joints of decorative glass framing members.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.
- B. Examine glazing units to locate orientation of outer surfaces as indicated on Drawings. Label or mark units as needed so that surface orientation is readily identifiable. Do not use materials that leave visible marks in the completed Work.

3.3 INSTALLATION

- A. Set decorative glass units in each series true in line with uniform orientation, pattern, draw, bow, and similar characteristics.
- B. Set glass lites with proper orientation so that each outer surface faces the direction indicated on Drawings.

3.4 GLAZING, GENERAL

- A. Decorative Glass: Install glazing as specified in Section 088000 "Glazing."
- B. Comply with combined written instructions of manufacturers of glass, gaskets, sealants, tapes, and other glazing materials unless more stringent requirements are indicated, including those in referenced glazing publications.
- C. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass is glass with edge damage or other imperfections that, when installed, could weaken glass and impair performance and appearance.
- D. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.
- E. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.
- F. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- G. Provide spacers for glass lites where length plus width is more than **50 inches**.
 - 1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances, and to comply with system performance requirements.
 - 2. Provide **1/8-inch**- minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.
- H. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and according to requirements in referenced glazing publications.

3.5 CLEANING AND PROTECTION

- A. Immediately after installation, remove nonpermanent labels and clean surfaces.
- B. Protect glass from contact with contaminating substances resulting from construction operations. If, despite such protection, contaminating substances do come into contact with glass, remove substances immediately as recommended in writing by glass manufacturer.
- C. Remove and replace glass that is damaged during construction period.
- D. Wash glass on both exposed surfaces not more than four days before date scheduled

for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

END OF SECTION 088113

SECTION 088300 - MIRRORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Silvered flat glass mirrors.

B. Related Requirements:

1. Section 088000 "Glazing" for glass with reflective coatings used for vision and spandrel lites.
2. Section 102800 "Toilet, Bath, and Laundry Accessories" for metal-framed mirrors.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Mirrors: Include description of materials and process used to produce each type of silvered flat glass mirror specified that indicates sources of glass, glass coating components, edge sealer, and quality-control provisions.

B. Shop Drawings: Include mirror elevations, edge details, mirror hardware, and attachment details.

C. Samples: For each type of the following:

1. Mirrors: **12 inches** square, including edge treatment on two adjoining edges.
2. Mirror Clips: Full size.
3. Mirror Trim: **12 inches** long.

D. Sustainable Design Submittals:

1.3 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of mirror and mirror mastic.

B. Preconstruction Test Reports: From mirror manufacturer indicating that mirror mastic was tested for compatibility and adhesion with mirror backing and substrates on which mirrors are installed.

C. Qualification Statements: For Installer.

D. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For mirrors to include in maintenance manuals.

1.5 PRECONSTRUCTION TESTING

- A. Preconstruction Mirror Mastic Compatibility Test: Submit mirror mastic products to mirror manufacturer for testing to determine compatibility of mastic with mirror backing.
 - 1. Testing is not required if data are submitted based on previous testing of mirror mastic products and mirror backing matching those submitted.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect mirrors in accordance with mirror manufacturer's written instructions and as needed to prevent damage to mirrors from moisture, condensation, temperature changes, direct exposure to sun, or other causes.
- B. Comply with mirror manufacturer's written instructions for shipping, storing, and handling mirrors as needed to prevent deterioration of silvering, damage to edges, and abrasion of glass surfaces and applied coatings. Store indoors.

1.7 FIELD CONDITIONS

- A. Environmental Limitations: Do not install mirrors until ambient temperature and humidity conditions are maintained at levels indicated for final occupancy.

1.8 WARRANTY

- A. Special Warranty: Manufacturer agrees to replace mirrors that deteriorate within specified warranty period. Deterioration of mirrors is defined as defects developed from normal use that are not attributed to mirror breakage or to maintaining and cleaning mirrors contrary to manufacturer's written instructions. Defects include discoloration, black spots, and clouding of the silver film.
 - 1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Source Limitations for Mirrors: Obtain mirrors from single source from single manufacturer.
- B. Source Limitations for Mirror Accessories: Obtain mirror-glazing accessories from single source.

2.2 SILVERED FLAT GLASS MIRRORS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Gardner Glass, Inc.
 - 2. Glasswerks LA, Inc
 - 3. Guardian Glass LLC
 - 4. National Glass Industries, Inc.
- B. Mirrors, General: ASTM C1503; manufactured using copper-free, low-lead mirror coating process.
- C. Tempered Glass Mirrors: Mirror Glazing Quality Q3 for blemish requirements and complying with ASTM C1048 for Kind FT, Condition A, tempered float glass before silver coating is applied; clear.
 - 1. Nominal Thickness: 6.0 mm.
- D. Safety Glazing Products: For tempered mirrors, provide products that comply with 16 CFR 1201, Category II.

2.3 MISCELLANEOUS MATERIALS

- A. Setting Blocks: Elastomeric material with a Shore, Type A durometer hardness of 85, plus or minus 5.
- B. Edge Sealer: Coating compatible with glass coating and approved by mirror manufacturer for use in protecting against silver deterioration at mirrored glass edges.
- C. Film Backing for Safety Mirrors: Film backing and pressure-sensitive adhesive; both compatible with mirror backing paint as certified by mirror manufacturer.

2.4 MIRROR HARDWARE

- A. Aluminum J-Channels: Aluminum extrusions with a return deep enough to produce a glazing channel to accommodate mirrors of thickness indicated and in lengths required to cover edges of mirrors in a single piece.
 - 1. Aluminum J-Channel Bottom and Side Trim: J-channels formed with front leg and back leg not less than **3/8 and 7/8 inch** in height, respectively, and a thickness of not less than **0.04 inch**.
 - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Andscot Company, Inc.
 - 2) C.R. Laurence Co., Inc.; CRH Americas, Inc.

2. Finish: Clear bright anodized.

- B. Mirror Top Clips: CRL Brite Chrome Quartet Mirror Clip Set or similar.
- C. Fasteners: Fabricated of same basic metal and alloy as fastened metal and matching it in finished color and texture where fasteners are exposed.

2.5 FABRICATION

- A. Shop fabricate mirrors to greatest extent possible.
- B. Fabricate cutouts for notches and holes in mirrors without marring visible surfaces. Locate and size cutouts, so they fit closely around penetrations in mirrors.
- C. Mirror Edge Treatment: Rounded polished.
 - 1. Seal edges of mirrors with edge sealer after edge treatment to prevent chemical or atmospheric penetration of glass coating.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, over which mirrors are to be mounted, with Installer present, for compliance with installation tolerances, substrate preparation, and other conditions affecting performance of the Work.
- B. Verify compatibility with and suitability of substrates, including compatibility of existing finishes or primers with mirror mastic.
- C. Proceed with installation only after unsatisfactory conditions have been corrected and surfaces are dry.

3.2 PREPARATION

- A. Comply with mastic manufacturer's written installation instructions for preparation of substrates, including coating substrates with mastic manufacturer's special bond coating where applicable.

3.3 INSTALLATION OF MIRRORS

- A. General: Install mirrors to comply with mirror manufacturer's written instructions and with referenced National Glass Association (NGA) publications. Mount mirrors accurately in place in a manner that avoids distorting reflected images.
 - 1. NGA Publications: "Glazing Manual" and "Installation Techniques Designed to Prolong the Life of Flat Glass Mirrors."

- B. Provide a minimum airspace of **1/8 inch** between back of mirrors and mounting surface for air circulation between back of mirrors and face of mounting surface.
- C. Install mirrors with mastic and mirror hardware. Attach mirror hardware securely to mounting surfaces with mechanical fasteners installed with anchors or inserts as applicable. Install fasteners so heads do not impose point loads on backs of mirrors.
 - 1. Aluminum J-Channels: Provide setting blocks **1/8 inch** thick by **4 inches** long at quarter points. To prevent trapping water, provide, between setting blocks, two slotted weeps not less than **1/4 inch** wide by **3/8 inch** long at bottom channel.
 - 2. Mirror Clips: Place a felt or plastic pad between mirror and each clip to prevent spalling of mirror edges. Locate clips so they are symmetrically placed and evenly spaced.
 - 3. Install mastic as follows:
 - a. Apply barrier coat to mirror backing where approved in writing by manufacturers of mirrors and backing material.
 - b. Apply mastic to comply with mastic manufacturer's written instructions for coverage and to allow air circulation between back of mirrors and face of mounting surface.
 - c. After mastic is applied, align mirrors and press into place while maintaining a minimum airspace of **1/8 inch** between back of mirrors and mounting surface.

3.4 CLEANING AND PROTECTION

- A. Protect mirrors from breakage and contaminating substances resulting from construction operations.
- B. Do not permit edges of mirrors to be exposed to standing water.
- C. Maintain environmental conditions that prevent mirrors from being exposed to moisture from condensation or other sources for continuous periods of time.

END OF SECTION 088300

SECTION 092216 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Nonstructural steel framing.

B. Related Requirements:

1. Section 054000 "Cold-Formed Metal Framing" for exterior and interior loadbearing, structural framing.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For code-compliance certification of studs and track.

- B. Evaluation Reports: From ICC-ES showing compliance with Project requirements, for the following:

1. Studs and track.
2. Post-installed anchors.
3. Power-actuated fasteners.

1.4 QUALITY ASSURANCE

- A. Code-Compliance Certification of Studs and Track: Provide documentation that framing members are certified in accordance with product-certification program of the Steel Framing Industry Association the Steel Stud Manufacturers Association or the Supreme Steel Framing System Association.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in manufacturer's original, unopened, undamaged containers with identification labels intact.
- B. Protect materials from corrosion, deformation, and other damage during delivery, storage, and handling in accordance with AISI S202.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics: Where indicated on Drawings, provide assemblies incorporating nonstructural steel framing identical to those of assemblies tested for fire resistance in accordance with ASTM E119 by an independent testing agency.
- B. STC-Rated Assemblies: Where indicated on Drawings, provide assemblies incorporating nonstructural framing identical to those of assemblies tested in accordance with ASTM E90 and classified in accordance with ASTM E413 by an independent testing agency.

2.2 NONSTRUCTURAL STEEL FRAMING

- A. Framing Members, General: Comply with requirements in AISI S220 for conditions indicated on Drawings.
 - 1. Protective Coating: ASTM A653/A653M, [G40](#) or coating with demonstrated equivalent corrosion resistance. Galvannealed products are unacceptable.
 - a. Equivalent Corrosion-Resistant Coating: Evaluation report acceptable to authorities having jurisdiction demonstrates corrosion resistance equivalent to specified protective coating.
- B. Studs and Track: Conventional members, roll-formed into standard shapes without surface deformations to stiffen framing members.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CEMCO; California Expanded Metal Products Co.
 - b. ClarkDietrich
 - c. SCAFCO Steel Stud Company; Stone Group of Companies
 - 2. Minimum Base-Steel Thickness: As indicated on Drawings.
 - 3. Minimum Yield Strength: [33 ksi](#).
 - 4. Depth: As indicated on Drawings.
- C. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated on Drawings.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CEMCO; California Expanded Metal Products Co.
 - b. ClarkDietrich
 - c. SCAFCO Steel Stud Company; Stone Group of Companies

2. Minimum Base-Steel Thickness: As indicated on Drawings.

2.3 AUXILIARY MATERIALS

- A. General: Provide auxiliary materials that comply with referenced installation standards.
 1. Fasteners for Steel Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.
- B. Post-Installed Anchors: Fastener systems with an evaluation report, acceptable to authorities having jurisdiction, based on ICC-ES AC01 AC193 AC58 or AC308 as appropriate for the substrate.
- C. Power-Actuated Anchors: Fastener systems with an evaluation report, acceptable to authorities having jurisdiction, based on ICC-ES AC70.
- D. Flat Hangers: ASTM A653/A653M G40 hot-dip galvanized steel sheet, in size indicated on Drawings.
- E. Isolation Strip at Exterior Walls: Provide one of the following:
 1. Asphalt-Saturated Organic Felt: ASTM D226/D226M, Type I (No. 15 asphalt felt), nonperforated.
 2. Foam Gasket: Adhesive-backed, closed-cell vinyl foam strips that allow fastener penetration without foam displacement, 1/8 inch thick, in width to suit steel stud size.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas, substrates, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF NONSTRUCTURAL METAL FRAMING, GENERAL

- A. Installation Standard: ASTM C754.
 1. Gypsum Board Assemblies: Also comply with requirements in ASTM C840 that apply to framing installation.
- B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.
- C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.

- D. Install bracing at terminations in assemblies.
- E. Do not bridge building control and expansion joints with framing members. Frame both sides of joints independently.

3.3 INSTALLATION OF NONSTRUCTURAL STEEL FRAMING

- A. Install framing system components at spacings indicated on Drawings, but not greater than spacings required by referenced installation standards for assembly types.
- B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.
- C. Install studs so flanges within framing system point in same direction.
- D. Install track at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated on Drawings to terminate at suspended ceilings. Continue framing around ducts that penetrate partitions above ceiling.
 - 1. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install track section (for cripple studs) at head and secure to jamb studs.
 - a. Install two studs at each jamb unless otherwise indicated on Drawings.
 - b. Install cripple studs at head adjacent to each jamb stud, with a minimum **1/2-inch** clearance from jamb stud to allow for installation of control joint in finished assembly.
 - 2. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated on Drawings. Install framing below sills of openings to match framing required above door heads.
 - 3. STC-Rated Partitions: Install framing to comply with STC-rated assembly indicated on Drawings.
- E. Direct Furring:
 - 1. Screw to wood framing.
 - 2. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced **24 inches** o.c.
- F. Installation Tolerances for Nonstructural Steel Framing:
 - 1. Framing Members: Install each framing member so fastening surfaces vary not more than **1/8 inch** from the plane formed by faces of adjacent framing.

END OF SECTION 092216

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior gypsum board.
2. Texture finishes.

B. Related Requirements:

1. Section 079219 "Acoustical Joint Sealants" for acoustical joint sealants installed in gypsum board assemblies.
2. Section 092216 "Non-Structural Metal Framing" for nonstructural steel framing and suspension systems that support gypsum board panels.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings:

1. Locations and installation of control and expansion joints, including plans, elevations, sections, and attachment details.

C. Samples for Initial Selection:

1. Texture Finish: For each type required.

D. Samples for Verification: Actual sample of finished products for the following:

1. Textured Finishes: Manufacturer's standard size for each textured finish required and on same backing indicated for Work.

E. Sustainable Design Submittals:

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.4 FIELD CONDITIONS

- A. Environmental Limitations: Comply with ASTM C840 requirements or manufacturer's written instructions, whichever are more stringent.
- B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.
- C. Do not install panels that are wet, moisture damaged, or mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain each type of gypsum panel and joint finishing material from single source with resources to provide products of consistent quality in appearance and physical properties.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated on Drawings in accordance with ASTM E119; tested by a qualified testing agency.
- B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated on Drawings in accordance with ASTM E90 and classified in accordance with ASTM E413; tested by a qualified testing agency.

2.3 GYPSUM BOARD, GENERAL

- A. Size: Provide panel products in maximum lengths and widths available that will minimize joints in each area and that correspond with support system specified or indicated on Drawings.

2.4 INTERIOR GYPSUM BOARD

- A. Gypsum Wallboard: ASTM C1396/C1396M.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- a. CertainTeed; SAINT-GOBAIN
 - b. Gold Bond Building Products, LLC provided by National Gypsum Company
 - c. USG Corporation
2. Thickness: As indicated on Drawings.
3. Long Edges: Tapered.

2.5 TILE BACKING PANELS

- A. Water-Resistant Gypsum Backing Board: ASTM C1396/C1396M, with manufacturer's standard edges.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed; SAINT-GOBAIN
 - b. Gold Bond Building Products, LLC provided by National Gypsum Company
 2. Core: As indicated on Drawings.

2.6 TRIM ACCESSORIES

- A. Interior Trim: ASTM C1047.
 1. Material: Galvanized-steel sheet or aluminum-coated steel sheet, rolled zinc, plastic, or paper-faced galvanized-steel sheet.
 2. Shapes:
 - a. Cornerbead.
 - b. LC-Bead: J-shaped; exposed long flange receives joint compound.
 - c. L-Bead: L-shaped; exposed long flange receives joint compound.
 - d. U-Bead: J-shaped; exposed short flange does not receive joint compound.
 - e. Expansion (control) joint.

2.7 JOINT TREATMENT MATERIALS

- A. General: Comply with ASTM C475/C475M requirements.
 1. Mold-Resistant Joint Compound: Use mold-resistant formulations with mold-resistant panel products.
- B. Joint Tape:
 1. Interior Gypsum Board: Paper.
 2. Tile Backing Panels: As recommended in writing by panel manufacturer.
- C. Joint Compound for Interior Gypsum Board: For each coat, use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints and damaged surface areas, use setting-type taping compound.
2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use drying-type, all-purpose compound.
 - a. Use setting-type compound for installing paper-faced metal trim accessories.
3. Fill Coat: For second coat, use drying-type, all-purpose compound.
4. Finish Coat: For third coat, use drying-type, all-purpose compound.
5. Skim Coat: For final coat of Level 5 finish, use drying-type, all-purpose compound.

D. Joint Compound for Tile Backing Panels:

1. Glass-Mat, Water-Resistant Backing Panel: As recommended in writing by backing panel manufacturer.
2. Cementitious Backer Units: As recommended in writing by backer unit manufacturer.
3. Water-Resistant Gypsum Backing Board: Use setting-type taping compound and setting-type, sandable topping compound.

2.8 AUXILIARY MATERIALS

- A. Provide auxiliary materials that comply with referenced installation standards and manufacturer's written instructions.
- B. Laminating Adhesive: Adhesive or joint compound recommended in writing by manufacturer for directly adhering gypsum panels to continuous substrate.
- C. Steel Drill Screws: ASTM C1002 unless otherwise specified or indicated on Drawings.
 1. Use screws complying with ASTM C954 for fastening panels to steel members from **0.033 to 0.112 inch** thick.
- D. Sound-Attenuation Blankets: ASTM C665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers as follows:
 1. Non-Fire-Resistance-Rated Assemblies: Glass.
- E. Acoustical Sealant: As specified in Section 079219 "Acoustical Joint Sealants."
- F. Thermal Insulation: As specified in Section 072100 "Thermal Insulation."

2.9 TEXTURE FINISHES

- A. Primer: As recommended in writing by textured finish manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates including welded hollow-metal frames and support framing, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.
- B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION AND FINISHING OF PANELS, GENERAL

- A. Comply with ASTM C840 requirements.
- B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.
- C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than **1/16 inch** of open space between panels. Do not force into place.
- D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.
- E. Form control and expansion joints with space between edges of adjoining gypsum panels.
- F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc.), except in chases braced internally.
 - 1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than **8 sq. ft.** in area.
 - 2. Fit gypsum panels around ducts, pipes, and conduits.
 - 3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow **1/4- to 3/8-inch-** wide joints to install sealant.
- G. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments. Provide **1/4- to 1/2-inch-** wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.

- H. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.
- I. Wood Framing: Install gypsum panels over wood framing, with floating internal corner construction. Do not attach gypsum panels across the flat grain of wide-dimension lumber, including floor joists and headers. Float gypsum panels over these members or provide control joints to counteract wood shrinkage.
- J. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C919 requirements and with manufacturer's written instructions for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.
- K. Install sound-attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.3 INSTALLATION OF INTERIOR GYPSUM BOARD

- A. Install interior gypsum board in the following locations:
 - 1. Gypsum Wallboard: As indicated on Drawings.
 - 2. Gypsum Ceiling Board: As indicated on Drawings.
- B. Single-Layer Application:
 - 1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated on Drawings.
 - 2. On partitions/walls, apply gypsum panels horizontally (perpendicular to framing) unless otherwise specified or indicated on Drawings or required by fire-resistance-rated assembly, and minimize end joints.
 - a. Stagger abutting end joints not less than one framing member in alternate courses of panels.
 - 3. Fastening Methods: Apply gypsum panels to supports with steel drill screws.

3.4 APPLICATION OF JOINT TREATMENT MATERIALS

- A. Finishing Panel Products: Treat joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare panel surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.
- B. Prefill open joints and damaged surface areas.
- C. Apply joint tape over panel joints, except for trim products specifically indicated as not intended to receive tape.

- D. Interior Gypsum Board: Finish panels to levels indicated below and in accordance with ASTM C840:
1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
 2. Level 2: Panels that are substrate for Glass-Fiber-Reinforced Plastic Paneling.
 3. Level 4: At panel surfaces that will be exposed to view unless otherwise indicated.
 - a. Primer and its application to surfaces are specified in Section 099123 "Interior Painting."

3.5 PROTECTION

- A. Protect adjacent surfaces from joint compound and promptly remove from floors and other non-gypsum board surfaces. Repair surfaces stained, marred, or otherwise damaged during gypsum board installation and finishing.
- B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.
- C. Remove and replace panels that are wet, moisture damaged, and mold damaged.
1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 092900

SECTION 093013 - CERAMIC TILING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Porcelain tile.
2. Setting material.
3. Grout materials.

1.2 DEFINITIONS

- A. General: Definitions in ANSI A108 series of tile installation standards and in ANSI A137.1 apply to Work of this Section unless otherwise specified.
- B. Face Size: Actual tile size, excluding spacer lugs.
- C. Module Size: Actual tile size plus joint width indicated.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples for Initial Selection: For tile, grout, and accessories involving color selection or shade variation.
- C. Samples for Verification:
1. Full-size units of each type and composition of tile and for each color and finish required.
 2. Full-size units of each type of trim and accessory.
 3. Stone thresholds in **6-inch** lengths.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Master Grade Certificates: For each shipment, type, and composition of tile, signed by tile manufacturer and Installer.
- C. Product Certificates: For each type of product, including product use classification.
- D. Product Test Reports:

1. Tile-setting and -grouting products.
2. Certified porcelain tile.
3. Slip-resistance test reports from qualified independent testing agency.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Extra Stock Material: Furnish extra materials, from the same production run, to Owner that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.
 2. Grout: Furnish quantity of grout equal to 3 percent of amount installed for each type, composition, and color indicated.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 1. Installer is a Five-Star member of the National Tile Contractors Association or a Trowel of Excellence member of the Tile Contractors' Association of America.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in ANSI A137.1 for labeling tile packages.
- B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.
- D. Store liquid materials in unopened containers and protected from freezing.

1.8 FIELD CONDITIONS

- A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Tile: Obtain tile of each type and color or finish from single source or producer.
 - 1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.
- B. Accessory Products: Obtain each of the following products specified in this Section from a single manufacturer:
 - 1. Stone thresholds.
 - 2. Backer units.

2.2 PRODUCTS, GENERAL

- A. ANSI Ceramic Tile Standard: Provide tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated.
 - 1. Provide tile complying with Standard Grade requirements unless otherwise indicated.
- B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.
- C. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.

2.3 PORCELAIN TILE

- A. Porcelain Tile Type: Glazed.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Crossville, Inc.
 - b. Daltile; a brand of Dal-Tile Corporation
 - 2. Certification: Tile certified by the Porcelain Tile Certification Agency.
 - 3. Face Size: As indicated on Drawings.
 - 4. Thickness: 5/16 inch.
 - 5. Product Use Classification: Interior, Wet (IW).
 - 6. Physical Properties: Chemical resistant when tested with indicated chemicals in

accordance with ASTM C650.

7. Tile Color, Glaze, and Pattern: As indicated on Drawings.
8. Grout Color: As indicated on Drawings.
9. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:
 - a. Cove Base: Surface bullnose, module size same as adjoining flat tile.
 - b. Cove Base Corner: Surface bullnose.

2.4 THRESHOLDS

- A. General: Fabricate to sizes and profiles indicated or required to provide transition between adjacent floor finishes.
 1. Bevel edges at 1:2 slope, with lower edge of bevel aligned with or up to **1/16 inch** above adjacent floor surface. Finish bevel to match top surface of threshold. Limit height of threshold to **1/2 inch** or less above adjacent floor surface.
- B. Marble Thresholds: ASTM C503/C503M, with a minimum abrasion resistance of 12 in accordance with ASTM C1353/C1353M or ASTM C241/C241M and with honed finish.
 1. Description:
 - a. Provide the following: As indicated on Drawings.

2.5 WATERPROOF MEMBRANES

- A. General: Manufacturer's standard product that complies with ANSI A118.10 and is recommended by manufacturer for application indicated. Include reinforcement and accessories recommended by manufacturer.

2.6 CRACK ISOLATION MEMBRANES

- A. General: Manufacturer's standard product that complies with ANSI A118.12 for standard performance and is recommended by manufacturer for application indicated. Include reinforcement and accessories recommended by manufacturer.

2.7 SETTING MATERIALS

- A. Portland Cement Mortar (Thickset) Installation Materials: ANSI A108.02.
 1. Cleavage Membrane: Installer's option of material that complies with ANSI A108.02, paragraph 3.8.
 2. Latex Additive: Manufacturer's standard water emulsion, serving as replacement for part or all of gaging water, of type specifically recommended by latex-additive manufacturer for use with field-mixed portland cement and aggregate mortar bed.

2.8 GROUT MATERIALS

- A. Sand-Portland Cement Grout: ANSI A108.10, consisting of white or gray cement and white or colored aggregate as required to produce color indicated.
- B. Standard Cement Grout: ANSI A118.6.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ARDEX Americas
 - b. H.B. Fuller Construction Products Inc. / TEC
 - c. Sika Corporation
- C. Grout for PregROUTed Tile Sheets: Same product used in factory to pregROUT tile sheets.

2.9 MISCELLANEOUS MATERIALS

- A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting and adhesive materials for installations indicated.
- B. Vapor-Retarder Membrane: Polyethylene sheeting, ASTM D4397, **4.0 mils** thick.
- C. Temporary Protective Coating: Formulated to protect exposed surfaces of tile against adherence of mortar and grout; compatible with tile, mortar, and grout products and easily removable after grouting is completed without damaging grout or tile.
- D. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.
- E. Grout Sealer: Grout manufacturer's standard product for sealing grout joints that does not change color or appearance of grout.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
 - 1. Verify that substrates for setting tile are firm; dry; clean; free of coatings that are incompatible with tile-setting materials, including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
 - 2. Verify that concrete substrates for tile floors installed with bonded mortar bed

comply with surface finish requirements in ANSI A108.01 for installations indicated.

- a. Verify that surfaces that received a steel trowel finish have been mechanically scarified.
 - b. Verify that protrusions, bumps, and ridges have been removed by sanding or grinding.
3. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
 4. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove coatings, including curing compounds or other coatings, that are incompatible with tile-setting materials.
- B. Where indicated, prepare substrates to receive waterproof membrane by applying a reinforced mortar bed that complies with ANSI A108.1 and is sloped **1/4 inch per foot** toward drains.
- C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.
- D. Substrate Flatness:
1. For tile shorter than **15 inches**, confirm that structure or substrate is limited to variation of **1/4 inch in 10 ft.** from the required plane, and no more than **1/16 inch in 12 inches** when measured from tile surface high points.
 2. For large format tile, tile with at least one edge **15 inches** or longer, confirm that structure or substrate is limited to **1/8 inch in 10 ft.** from the required plane, and no more than **1/16 inch in 24 inches** when measured from tile surface high points.

3.3 INSTALLATION OF CERAMIC TILE SYSTEM

- A. Install tile backing panels and treat joints in accordance with ANSI A108.11 and manufacturer's written instructions for type of application indicated.
- B. Install waterproof membrane to comply with ANSI A108.13 and manufacturer's written instructions to produce waterproof membrane of uniform thickness that is bonded securely to substrate.

1. Allow waterproof membrane to cure and verify by testing that it is watertight before installing tile or setting materials over it.
- C. Install crack isolation membrane to comply with ANSI A108.17 and manufacturer's written instructions to produce membrane of uniform thickness that is bonded securely to substrate.
 1. Allow crack isolation membrane to cure before installing tile or setting materials over it.
- D. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.
 1. Add materials, water, and additives in accurate proportions.
 2. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.
- E. Install tile in accordance with TCNA's "Handbook for Ceramic, Glass, and Stone Tile Installation" for TCNA installation methods specified in tile installation schedules. Comply with parts of ANSI A108 series that are referenced in TCNA installation methods and specified in tile installation schedules, and apply to types of setting and grouting materials used.
 1. For the following installations, follow procedures in ANSI A108 series of tile installation standards for providing 95 percent mortar coverage:
 - a. Tile floors in wet areas.
 - b. Tile floors in laundries.
 - c. Tile floors consisting of tiles **8 by 8 inches** or larger.
 2. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
 3. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
 4. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.
 5. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.
 - a. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
 - b. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise

indicated.

- F. Thresholds: Install stone and solid surface thresholds in same type of setting bed as adjacent floor unless otherwise indicated.
 - 1. At locations where mortar bed (thickset) would otherwise be exposed above adjacent floor finishes, set thresholds in modified dry-set mortar (thinset).
 - 2. Do not extend waterproof membrane or crack isolation membrane under thresholds set in modified dry-set mortar. Fill joints between such thresholds and adjoining tile set on waterproof membrane or crack isolation membrane with elastomeric sealant.

3.4 ADJUSTING AND CLEANING

- A. Remove and replace tile that is damaged or that does not match adjoining tile. Provide new matching units, installed as specified and in a manner to eliminate evidence of replacement.
- B. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.
 - 1. Remove grout residue from tile as soon as possible.
 - 2. Clean grout smears and haze from tile in accordance with tile and grout manufacturer's written instructions. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.

3.5 PROTECTION

- A. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.
- B. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.
- C. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.6 INTERIOR CERAMIC TILE INSTALLATION SCHEDULE

- A. Interior Floor Installations, Concrete Subfloor:
 - 1. TCNA F111 <PT-1>: Method ANSI A108.1C. Cement mortar bed (thickset) installed over cleavage membrane.
 - a. Ceramic Tile Type: As indicated on drawings.

- b. Bond Coat for Cured-Bed Method: Modified dry-set mortar.
- c. Grout: High-performance unsanded cement grout.
- d. Joint Width: Minimum per manufacturer.

END OF SECTION 093013

SECTION 095113 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Acoustical panels.
2. Metal suspension system.
3. Metal edge moldings and trim.

1.2 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

B. Samples: For each exposed product and for each color and texture specified, **6 inches** in size.

C. Samples for Initial Selection: For components with factory-applied finishes.

D. Samples for Verification: For each component indicated and for each exposed finish required, prepared on Samples of sizes indicated below:

1. Acoustical Panels: Set of **6-inch-** square Samples of each type, color, pattern, and texture.
2. Exposed Suspension-System Members, Moldings, and Trim: Set of **6-inch-** long Samples of each type, finish, and color.

1.3 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For each acoustical panel ceiling, for tests performed by a qualified testing agency.

B. Evaluation Reports: For each acoustical panel ceiling suspension system and anchor and fastener type, from ICC-ES.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For finishes to include in maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Acoustical Ceiling Units: Full-size panels equal to 2 percent of quantity installed.
 - 2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed.
 - 3. Hold-Down Clips: Equal to 2 percent of quantity installed.
 - 4. Impact Clips: Equal to 2 percent of quantity installed.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver acoustical panels, suspension-system components, and accessories to Project site and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.
- B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.

1.7 FIELD CONDITIONS

- A. Environmental Limitations: Do not install acoustical panel ceilings until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Source Limitations for Ceiling System: Obtain each type of acoustical ceiling panel and its supporting suspension system from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Suspended ceilings to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.
- B. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: Class A in accordance with ASTM E1264.
 - 2. Smoke-Developed Index: 50 or less.

2.3 ACOUSTICAL PANELS

A. Acoustical Panels:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed; SAINT-GOBAIN
 - b. USG Corporation
 - c. Armstrong World Industries, Inc.
2. Acoustical Panel Standard: Provide manufacturer's standard panels in accordance with ASTM E1264 and designated by type, form, pattern, acoustical rating, and light reflectance unless otherwise indicated.
3. Classification: Provide panels as follows:
 - a. Type and Form, Type III: Mineral base with painted finish; Form 2, water felted.
 - b. Pattern: As indicated on drawings.
4. Color: White.
5. Light Reflectance (LR): Not less than 0.80.
6. Ceiling Attenuation Class (CAC): Not less than 35.
7. Noise Reduction Coefficient (NRC): Not less than 0.55.
8. Edge/Joint Detail: As indicated on drawings.
9. Thickness: As indicated on Drawings.
10. Modular Size: As indicated on Drawings.

2.4 METAL SUSPENSION SYSTEM

A. Exposed Metal Suspension System:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Armstrong Ceiling & Wall Solutions
 - b. CertainTeed; SAINT-GOBAIN
 - c. USG Corporation
2. Metal Suspension-System Standard: Provide manufacturer's standard, direct-hung, metal suspension system and accessories in accordance with ASTM C635/C635M and designated by type, structural classification, and finish indicated.
3. Wide-Face, Capped, Double-Web, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; prepainted, electrolytically zinc coated, or hot-dip galvanized, **G30** coating designation; with prefinished **15/16-inch**-wide metal caps on flanges.

- a. Structural Classification: Intermediate-duty system.
- b. End Condition of Cross Runners: butt-edge type.
- c. Face Design: Flat, flush.
- d. Cap Material: aluminum.
- e. Cap Finish: Painted white.

2.5 ACCESSORIES

- A. Attachment Devices: Size for five times the design load indicated in ASTM C635/C635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.
- B. Wire Hangers, Braces, and Ties: Provide wires as follows:
 - 1. Zinc-Coated, Carbon-Steel Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper.
 - 2. Size: Wire diameter sufficient for its stress at three times hanger design load (ASTM C635/C635M, Table 1, "Direct Hung") will be less than yield stress of wire, but not less than 0.106-inch- diameter wire.
- C. Hold-Down Clips: Manufacturer's standard hold-down.
- D. Impact Clips: Manufacturer's standard impact-clip system designed to absorb impact forces against acoustical panels.
- E. Seismic Clips: Manufacturer's standard seismic clips designed to secure acoustical panels in place during a seismic event.
- F. Seismic Stabilizer Bars: Manufacturer's standard perimeter stabilizers designed to accommodate seismic forces.
- G. Seismic Struts: Manufacturer's standard compression struts designed to accommodate seismic forces.

2.6 METAL EDGE MOLDINGS AND TRIM

- A. Metal Edge Moldings and Trim:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Armstrong Ceiling & Wall Solutions
 - b. CertainTeed; SAINT-GOBAIN
 - c. USG Corporation
 - 2. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system

runners.

- a. Edge moldings to fit acoustical panel edge details and suspension systems indicated and match width and configuration of exposed runners unless otherwise indicated.

2.7 ACOUSTICAL SEALANT

- A. Acoustical Sealant: As specified in Section 079219 "Acoustical Joint Sealants."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.
- B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders unless otherwise indicated, and comply with layout shown on reflected ceiling plans.
- B. Layout openings for penetrations centered on the penetrating items.

3.3 INSTALLATION OF ACOUSTICAL PANEL CEILINGS

- A. Install acoustical panel ceilings in accordance with ASTM C636/C636M, seismic design requirements, and manufacturer's written instructions.
- B. Suspend ceiling hangers from building's structural members and as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
 - 2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 - 3. Where width of ducts and other construction within ceiling plenum produces

- hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly to structure or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
 5. Space hangers not more than **48 inches** o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than **8 inches** from ends of each member.
 6. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards.
- C. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.
1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.
 2. Screw attach moldings to substrate at intervals not more than **16 inches** o.c. and not more than **3 inches** from ends. Miter corners accurately and connect securely.
 3. Do not use exposed fasteners, including pop rivets, on moldings and trim.
- D. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.
- E. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide precise fit.
1. Arrange directionally patterned acoustical panels as follows:
 - a. As indicated on reflected ceiling plans.
 2. For square-edged panels, install panels with edges fully hidden from view by flanges of suspension-system runners and moldings.
 3. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
 4. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.

3.4 FIELD QUALITY CONTROL

- A. Special Inspections: Engage a qualified special inspector to perform the following special inspections:
1. Periodic inspection during the installation of suspended ceiling grids in accordance with ASCE/SEI 7.

- B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- C. Acoustical panel ceiling hangers, anchors, and fasteners will be considered defective if they do not pass tests and inspections.
- D. Prepare test and inspection reports.

3.5 CLEANING

- A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage.
- B. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095113

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Thermoplastic-rubber base.
 - 2. Rubber molding accessories.
 - 3. Vinyl molding accessories.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each exposed product and for each color and texture specified, not less than **12 inches** long.
- C. Samples for Initial Selection: For each type of product indicated.
- D. Samples for Verification: For each type of product indicated and for each color, texture, and pattern required in manufacturer's standard-size Samples, but not less than **12 inches** long.
- E. Product Schedule: For resilient base and accessory products. Use same designations indicated on Drawings.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than **50 deg F** or more than **90 deg F**.

1.4 FIELD CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than **70 deg F** or more than **95 deg F**, in spaces to receive resilient products during the following periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than **55 deg F** or more than

95 deg F.

- C. Install resilient products after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

2.2 THERMOPLASTIC-RUBBER BASE

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Johnsonite; a Tarkett company
 - 2. Roppe Corporation; Roppe Holding Company
 - 3. Mannington Commercial
- B. Product Standard: ASTM F1861, Type TP (rubber, thermoplastic).
 - 1. Group: I (solid, homogeneous).
 - 2. Style and Location:
 - a. Style B, Cove: As indicated on Drawings.
- C. Thickness: 0.125 inch.
- D. Height: As indicated on Drawings.
- E. Lengths: Coils in manufacturer's standard length.
- F. Outside Corners: Job formed or preformed.
- G. Inside Corners: Job formed or preformed.
- H. Colors: As indicated on Drawings.

2.3 INSTALLATION MATERIALS

- A. Adhesives: Water-resistant type recommended by resilient-product manufacturer for resilient products and substrate conditions indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for

maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
 1. Installation of resilient products indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
- B. Do not install resilient products until materials are the same temperature as space where they are to be installed.
 1. At least 48 hours in advance of installation, move resilient products and installation materials into spaces where they will be installed.
- C. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient products.

3.3 RESILIENT BASE INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient base.
- B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.
- C. Install resilient base in lengths as long as practical without gaps at seams and with tops of adjacent pieces aligned.
- D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.
- E. Do not stretch resilient base during installation.
- F. Preformed Corners: Install preformed corners before installing straight pieces.
- G. Job-Formed Corners:
 1. Outside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches in length.
 - a. Form without producing discoloration (whitening) at bends.
 2. Inside Corners: Use straight pieces of maximum lengths possible and form with

returns not less than 3 inches in length.

- a. Miter or cope corners to minimize open joints.

3.4 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protecting resilient products.
- B. Perform the following operations immediately after completing resilient-product installation:
 1. Remove adhesive and other blemishes from surfaces.
- C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

END OF SECTION 096513

SECTION 096516 - RESILIENT SHEET FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Unbacked vinyl sheet flooring.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color, texture, and pattern specified, in manufacturer's standard size, but not less than 6-by-9-inch sections.

1. For heat-welding bead, manufacturer's standard-size Samples, but not less than 9 inches long, of each color required.

C. Samples for Initial Selection: For each type of resilient sheet flooring indicated.

D. Samples for Verification: For each type of resilient sheet flooring, in manufacturer's standard size, but not less than 6-by-9-inch sections of each color, texture, and pattern required.

1. For heat-welding bead, manufacturer's standard-size Samples, but not less than 9 inches long, of each color required.

E. Welded-Seam Samples: For seamless-installation technique indicated and for each resilient sheet flooring product, color, and pattern required; with seam running lengthwise and in center of 6-by-9-inch Sample applied to a rigid backing and prepared by Installer for this Project.

F. Product Schedule: For resilient sheet flooring. Use same designations indicated on Drawings.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of resilient sheet flooring to include in maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are competent in techniques required by manufacturer for resilient sheet flooring installation and seaming method indicated.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store resilient sheet flooring and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F or more than 90 deg F. Store rolls upright.

1.7 FIELD CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 85 deg F, in spaces to receive resilient sheet flooring during the following periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F or more than 95 deg F.
- C. Close spaces to traffic during resilient sheet flooring installation.
- D. Close spaces to traffic for 48 hours after resilient sheet flooring installation.
- E. Install resilient sheet flooring after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

2.2 UNBACKED VINYL SHEET FLOORING

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Armstrong Flooring, Inc.
 - 2. Roppe Corporation; Roppe Holding Company
 - 3. AHF Contract
- B. Product Standard: ASTM F1913.

- C. Thickness: 0.080 inch.
- D. Wearing Surface: Smooth.
- E. Sheet Width: As standard with manufacturer.
- F. Seamless-Installation Method: Heat welded.
- G. Colors and Patterns: As indicated on Drawings.

2.3 INSTALLATION MATERIALS

- A. Adhesives: Water-resistant type recommended by flooring and adhesive manufacturers to suit resilient sheet flooring and substrate conditions indicated.
- B. Seamless-Installation Accessories:
 - 1. Heat-Welding Bead: Manufacturer's solid-strand product for heat welding seams.
 - a. Colors: Match flooring.
- C. Integral-Flash-Cove-Base Accessories:
 - 1. Cove Strip: 1-inch radius provided or approved by resilient sheet flooring manufacturer.
 - 2. Cap Strip: Square metal, vinyl, or rubber cap provided or approved by resilient sheet flooring manufacturer.
 - 3. Corners: Metal inside and outside corners and end stops provided or approved by resilient sheet flooring manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
 - 1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient sheet flooring.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare substrates according to resilient sheet flooring manufacturer's written instructions to ensure adhesion of resilient sheet flooring.

- B. Do not install resilient sheet flooring until materials are the same temperature as space where they are to be installed.
 - 1. At least 48 hours in advance of installation, move flooring and installation materials into spaces where they will be installed.
- C. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient sheet flooring.

3.3 RESILIENT SHEET FLOORING INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient sheet flooring.
- B. Unroll resilient sheet flooring and allow it to stabilize before cutting and fitting.
- C. Lay out resilient sheet flooring as follows:
 - 1. Maintain uniformity of flooring direction.
 - 2. Minimize number of seams; place seams in inconspicuous and low-traffic areas, at least **6 inches** away from parallel joints in flooring substrates.
 - 3. Match edges of flooring for color shading at seams.
 - 4. Avoid cross seams.
- D. Scribe and cut resilient sheet flooring to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
- E. Extend resilient sheet flooring into toe spaces, door reveals, closets, and similar openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on resilient sheet flooring as marked on substrates. Use chalk or other nonpermanent marking device.
- G. Install resilient sheet flooring on covers for telephone and electrical ducts and similar items in installation areas. Maintain overall continuity of color and pattern between pieces of flooring installed on covers and adjoining flooring. Tightly adhere flooring edges to substrates that abut covers and to cover perimeters.
- H. Adhere resilient sheet flooring to substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
- I. Seamless Installation:
 - 1. Heat-Welded Seams: Comply with ASTM F1516. Rout joints and heat weld with welding bead to fuse sections permanently into a seamless flooring installation. Prepare, weld, and finish seams to produce surfaces flush with adjoining flooring surfaces.
- J. Integral-Flash-Cove Base: Cove resilient sheet flooring to dimension indicated up

vertical surfaces. Support flooring at horizontal and vertical junction with cove strip. Butt at top against cap strip.

1. Install metal corners at inside and outside corners.

3.4 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protecting resilient sheet flooring.
- B. Perform the following operations immediately after completing resilient sheet flooring installation:
 1. Remove adhesive and other blemishes from surfaces.
 2. Sweep and vacuum surfaces thoroughly.
 3. Damp-mop surfaces to remove marks and soil.
- C. Protect resilient sheet flooring from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Cover resilient sheet flooring until Substantial Completion.

END OF SECTION 096516

SECTION 096519 - RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Vinyl composition floor tile.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: Full-size units of each color, texture, and pattern of floor tile required.
- C. Samples for Initial Selection: For each type of floor tile indicated.
- D. Samples for Verification: Full-size units of each color and pattern of floor tile required.
- E. Product Schedule: For floor tile. Use same designations indicated on Drawings.

1.3 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of floor tile to include in maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are competent in techniques required by manufacturer for floor tile installation and seaming method indicated.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store floor tile and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than **50 deg F** or more than **90 deg F**. Store floor tiles on flat surfaces.

1.7 FIELD CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than **70 deg F** or more than **95 deg F**, in spaces to receive floor tile during the following periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than **55 deg F** or more than **95 deg F**.
- C. Close spaces to traffic during floor tile installation.
- D. Close spaces to traffic for 48 hours after floor tile installation.
- E. Install floor tile after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 VINYL COMPOSITION FLOOR TILE

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Armstrong Flooring, Inc.
 - 2. Johnsonite; a Tarkett company
 - 3. patcraft
- B. Tile Standard: ASTM F3261.
- C. Thickness: 0.157 inch.
- D. Size: **As indicated on Drawings.**

2.2 INSTALLATION MATERIALS

- A. Adhesives: Water-resistant type recommended by floor tile and adhesive manufacturers to suit floor tile and substrate conditions indicated.
- B. Seamless-Installation Accessories:
- C. Joint Sealant for Resilient Terrazzo Floor Tile: Silicone sealant of type and grade recommended in writing by floor tile manufacturer to suit resilient terrazzo floor tile.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
 - 1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of floor tile.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare substrates according to floor tile manufacturer's written instructions to ensure adhesion of resilient products.
- B. Concrete Substrates: Prepare according to ASTM F710.
 - 1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
 - 2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by floor tile manufacturer. Do not use solvents.
 - 3. Alkalinity and Adhesion Testing: Perform tests recommended by floor tile manufacturer. Proceed with installation only after substrate alkalinity falls within range on pH scale recommended by manufacturer in writing, but not less than 5 or more than 9 pH.
 - 4. Moisture Testing: Perform tests so that each test area does not exceed 200 sq. ft., and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.
 - a. Anhydrous Calcium Chloride Test: ASTM F1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
 - b. Relative Humidity Test: Using in-situ probes, ASTM F2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level measurement.
- C. Access Flooring Panels: Remove protective film of oil or other coating using method recommended by access flooring manufacturer.
- D. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.
- E. Do not install floor tiles until materials are the same temperature as space where they are to be installed.

1. At least 48 hours in advance of installation, move resilient floor tile and installation materials into spaces where they will be installed.
- F. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient floor tile.

3.3 FLOOR TILE INSTALLATION

- A. Comply with manufacturer's written instructions for installing floor tile.
- B. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half tile at perimeter.
1. Lay tiles in pattern indicated.
- C. Match floor tiles for color and pattern by selecting tiles from cartons in the same sequence as manufactured and packaged, if so numbered. Discard broken, cracked, chipped, or deformed tiles.
1. Lay tiles in pattern of colors and sizes indicated.
- D. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
- E. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor tiles as marked on substrates. Use chalk or other nonpermanent marking device.
- G. Install floor tiles on covers for telephone and electrical ducts, building expansion-joint covers, and similar items in installation areas. Maintain overall continuity of color and pattern between pieces of tile installed on covers and adjoining tiles. Tightly adhere tile edges to substrates that abut covers and to cover perimeters.
- H. Adhere floor tiles to substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

3.4 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protecting floor tile.
- B. Perform the following operations immediately after completing floor tile installation:
1. Remove adhesive and other blemishes from surfaces.
 2. Sweep and vacuum surfaces thoroughly.
 3. Damp-mop surfaces to remove marks and soil.

- C. Protect floor tile from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Cover floor tile until Substantial Completion.

END OF SECTION 096519

SECTION 096536 - STATIC-CONTROL RESILIENT FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Static-control, vinyl composition floor tile.

B. Related Requirements:

1. Section 096513 "Resilient Base and Accessories" for resilient base, reducer strips, and other accessories installed with static-control resilient flooring.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each type of static-control resilient flooring and in each color, pattern, and texture required, in manufacturer's standard size, but not less than **6 by 9 inches**.

C. Samples for Initial Selection: For each exposed static-control resilient flooring product, in manufacturer's standard size.

D. Samples for Verification: For each type of static-control resilient flooring and in each color, pattern, and texture required, of size indicated below:

1. Floor Tile: Full-size units.

E. Product Schedule: For static-control resilient flooring. Use same designations indicated on Drawings.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For static-control resilient flooring, for tests performed by a qualified testing agency.

C. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of static-control resilient flooring to include in maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs workers for this Project who are competent in installation techniques required by manufacturer for specified static-control resilient flooring.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store static-control resilient flooring and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended in writing by manufacturer, but not less than 50 deg F or more than 90 deg F.

- 1. Floor Tile: Store on flat surfaces.

1.7 PROJECT CONDITIONS

- A. Maintain ambient temperatures in spaces to receive static-control resilient flooring within range recommended by manufacturer, but not less than 60 deg F or more than 85 deg F, during the following time periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. Until Substantial Completion, maintain ambient temperatures in installation areas within range recommended by manufacturer, but not less than 60 deg F or more than 85 deg F.
- C. Close spaces to traffic during static-control resilient flooring installation.
- D. Close spaces to traffic for 48 hours after static-control resilient flooring installation.
- E. Install static-control resilient flooring after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

2.2 STATIC-CONTROL, VINYL COMPOSITION FLOOR TILE

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Armstrong Flooring, Inc.
 - 2. Roppe Corporation; Roppe Holding Company
- B. Source Limitations: Obtain floor tile from single source from single manufacturer.

- C. Static-Control Properties: As determined by testing identical products in accordance with test method indicated by an independent testing and inspecting agency.
 - 1. Electrical Resistance:
 - a. Material: Point-to-point and point-to-ground resistances between 1,000,000 ohms and 1,000,000,000 ohms when tested in accordance with ASTM F150.
 - b. Material in Combination with a Person: Average resistance of 448,000,000 ohms when tested in accordance with ESD STM97.1.
 - 2. Static Generation: When tested in accordance with ESD STM97.2, an average of less than 30 V when tested at 12 percent relative humidity with static-control footwear.
 - 3. Static Decay: 1000 to 100 V in maximum of 0.2 seconds at 12 percent relative humidity when tested in accordance with manufacturer's standard test protocol using an operator wearing static-control footwear and a static decay meter.
- D. Critical Radiant Flux: 0.45 W/sq. cm or greater in accordance with ASTM E648 or NFPA 253.
- E. Construction: ASTM F1066 Class 2, vinyl composition floor tile, through pattern.
- F. Thickness: 1/8 inch.
- G. Size: As indicated on Drawings.
- H. Colors and Patterns: As indicated on Drawings.

2.3 INSTALLATION MATERIALS

- A. Trowelable Leveling and Patching Compounds: Latex-modified portland cement or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.
- B. Static-Control Adhesive: Provided or approved by manufacturer; type that maintains electrical continuity of floor-covering system to ground connection.
- C. Grounding Strips: Provided or approved by manufacturer; type and size that maintains electrical continuity of floor-covering system to ground connection.
- D. Seamless-Installation Accessories:

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for conditions affecting performance of the Work.

- B. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with installation or static-control characteristics of floor coverings.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare substrates in accordance with manufacturer's written instructions to ensure successful installation of static-control resilient flooring and electrical continuity of floor-covering systems.
- B. Concrete Substrates: Prepare in accordance with ASTM F710.
 - 1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
 - 2. Remove substrate coatings and other substances that are incompatible with floor-covering adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.
 - 3. Alkalinity and Adhesion Testing: Perform tests recommended in writing by manufacturer. Proceed with installation only after substrate alkalinity is not less than 6 or more than 8 pH unless otherwise recommended in writing by flooring manufacturer.
 - 4. Moisture Testing: Perform tests so that each test area does not exceed [200 sq. ft.](#), and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.
 - a. Anhydrous Calcium Chloride Test: ASTM F1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of [3 lb of water/1000 sq. ft.](#) in 24 hours.
 - b. Relative Humidity Test: Using in-situ probes, ASTM F2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level measurement.
- C. Access Flooring Panels: Remove protective film of oil or other coating using method recommended by access flooring manufacturer.
- D. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.
- E. Do not install static-control resilient flooring until it is same temperature as space where it is to be installed.
 - 1. Move static-control resilient flooring and installation materials into spaces where they will be installed at least 48 hours in advance of installation.
- F. Sweep and vacuum substrates to be covered by static-control resilient flooring immediately before installation.

3.3 INSTALLATION, GENERAL

- A. Install static-control resilient flooring in accordance with manufacturer's written instructions.
- B. Extend grounding strips beyond perimeter of static-control resilient floor-covering surfaces to ground connections.
 - 1. For adhesively installed flooring, embed grounding strips in static-control adhesive.
- C. Scribe, cut, and fit static-control resilient flooring to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
 - 1. Extend static-control resilient flooring below built-in items and permanent, but movable, items that allow for a flexible layout where indicated on Drawings.
- D. Extend static-control resilient flooring into toe spaces, door reveals, closets, and similar openings.
- E. Extend static-control resilient flooring to center of door openings where flooring or color transitions occur.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on static-control resilient flooring as marked on substrates. Use chalk or other nonpermanent, nonstaining marking device.
- G. Install static-control resilient flooring on covers for telephone and electrical ducts, and similar items in installation areas. Maintain overall continuity of color and pattern with pieces of static-control resilient flooring installed on covers. Tightly adhere static-control resilient flooring edges to substrates that abut covers and to cover perimeters.
- H. Adhesive Installation: Adhere static-control resilient flooring to substrates using a full spread of static-control adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

3.4 INSTALLATION OF FLOOR TILE

- A. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so floor tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half floor tile at perimeter.
 - 1. Lay floor tiles square with room axis.
- B. Match floor tiles for color and pattern by selecting floor tiles from cartons in same sequence as manufactured and packaged if so numbered. Discard broken, cracked, chipped, or deformed floor tiles.
 - 1. Lay vinyl composition floor tiles with grain direction alternating in adjacent floor

tiles (basket-weave pattern).

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to test electrical resistance of static-control resilient flooring in accordance with ASTM F150 for compliance with requirements.
 - 1. Arrange for testing after the following:
 - a. Static-control adhesives have fully cured.
 - b. Static-control resilient flooring has stabilized to ambient conditions.
 - c. Ground connections are completed.
- B. Static-control resilient flooring will be considered defective if it does not pass tests and inspections.
- C. Prepare test and inspection reports.

3.6 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protection of static-control resilient flooring.
- B. Perform the following operations immediately after completing static-control resilient flooring:
 - 1. Remove static-control adhesive from exposed surfaces.
 - 2. Remove dirt and blemishes from exposed surfaces.
 - 3. Sweep and vacuum surfaces thoroughly.
 - 4. Damp-mop surfaces to remove marks and soil.
- C. Protect static-control resilient flooring from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
 - 1. Do not wax static-control resilient flooring.
- D. Cover static-control resilient flooring and protect from rolling loads until Substantial Completion.

END OF SECTION 096536

SECTION 096813 - TILE CARPETING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Carpet tile.

B. Related Requirements:

1. Section 024119 "Selective Demolition" for removing existing floor coverings.
2. Section 096513 "Resilient Base and Accessories" Section 096519 "Resilient Tile Flooring" for resilient wall base and accessories installed with carpet tile.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include manufacturer's written data on physical characteristics, durability, and fade resistance.
2. Include manufacturer's written installation recommendations for each type of substrate.

B. Samples for Initial Selection: Manufacturer's standard color sheets, showing full range of available colors for each type of carpet tile.

1. Include Samples of exposed edge, transition, and other accessory stripping involving color or finish selection.

C. Samples for Verification: Actual sample of finished products for each of the following products and for each color and texture required. Label each Sample with manufacturer's name, material description, color, pattern, and designation indicated on Drawings and in schedules.

1. Carpet Tile: Full-size Sample.
2. Exposed Edge, Transition, and Other Accessory Stripping: **12-inch-** long Samples.

D. Product Schedule: For carpet tile. Use same designations indicated on Drawings.

1.3 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For carpet tile, for tests performed by a qualified testing agency.

B. Qualification Statements: For Installer.

- C. Sample Warranties: For carpet tile.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For carpet tiles. Include the following:
 - 1. Methods for maintaining carpet tile, including cleaning and stain-removal products and procedures and manufacturer's recommended maintenance schedule.
 - 2. Precautions for cleaning materials and methods that could be detrimental to carpet tile.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An authorized representative who is certified by the International Certified Flooring Installers Association at the Commercial II certification level or who can demonstrate compliance with its certification program requirements.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Comply with CRI 104.

1.7 FIELD CONDITIONS

- A. Comply with CRI 104 for temperature, humidity, and ventilation limitations.
- B. Environmental Limitations: Do not deliver or install carpet tiles until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and ambient temperature and humidity conditions are maintained at levels planned for building occupants during the remainder of the construction period.
- C. Do not install carpet tiles over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive and concrete slabs have pH range recommended in writing by carpet tile manufacturer.
- D. Where demountable partitions or other items are indicated for installation on top of carpet tiles, install carpet tiles before installing these items.

1.8 WARRANTY

- A. Special Warranty for Carpet Tiles: Manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.
 - 1. Warranty does not include deterioration or failure of carpet tile due to unusual traffic, failure of substrate, vandalism, or abuse.
 - 2. Failures include, but are not limited to, the following:

- a. More than 10 percent loss of face fiber, edge raveling, snags, and runs.
- b. Loss of tuft-bind strength.
- c. Excess static discharge.
- d. Delamination.
- e. Dimensional instability.

3. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 CARPET TILE

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 1. Interface, Inc.
 2. Shaw Industries Group, Inc.; Berkshire Hathaway Company
- B. Color: As indicated on Drawings.
- C. Pattern: As indicated on Drawings.
- D. Fiber Content: 100 percent nylon 6.
- E. Pile Characteristic: Multi-Level Pattern Loop pile.
- F. Density: **4966 oz./cu. yd..**
- G. Pile Thickness: 0.116 inches for finished carpet tile.
- H. Stitches: **11 per inch.**
- I. Gage: **1/10 inch.**
- J. Surface Pile Weight: **16 oz./sq. yd..**
- K. Primary Backing/Backcoating: Manufacturer's standard composite materials.
- L. Secondary Backing: Manufacturer's standard material.
- M. Size: As indicated on Drawings.
- N. Total Thickness: 0.24 inches.
- O. Applied Treatments:
 1. Soil-Resistance Treatment: Manufacturer's standard treatment.
- P. Performance Characteristics:

1. Texture Appearance Retention Rating (TARR): Heavy traffic, 3.0 minimum in accordance with ASTM D7330.
2. Critical Radiant Flux Classification: Not less than 0.22 W/sq. cm in accordance with NFPA 253.
3. Dry Breaking Strength: Not less than **100 lbf** in accordance with ASTM D2646.
4. Tuft Bind: Not less than **6.2 lbf** in accordance with ASTM D1335.
5. Delamination: Not less than **3.5 lbf/in.** in accordance with ASTM D3936.
6. Dimensional Tolerance: Within **1/32 inch** of specified size dimensions, as determined by physical measurement.
7. Colorfastness to Crocking: Not less than 4, wet and dry, in accordance with AATCC 165.
8. Colorfastness to Light: Not less than 4 after 40 AFU (AATCC fading units) in accordance with AATCC 16.3 Option 3.
9. Electrostatic Propensity: Less than 3.5 kV in accordance with AATCC 134.

2.2 INSTALLATION ACCESSORIES

- A. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended in writing by carpet tile manufacturer.
- B. Adhesives: Water-resistant, mildew-resistant, nonstaining, pressure-sensitive types to suit products and subfloor conditions indicated, that comply with flammability requirements for installed carpet tile, and that are recommended in writing by carpet tile manufacturer for releasable installation.
- C. Metal Edge/Transition Strips: Extruded aluminum with mill finish of profile and width shown, of height required to protect exposed edge of carpet, and of maximum lengths to minimize running joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for maximum moisture content, alkalinity range, installation tolerances, and other conditions affecting carpet tile performance.
- B. Examine carpet tile for type, color, pattern, and potential defects.
- C. Concrete Slabs: Verify that finishes comply with requirements specified in Section 033000 "Cast-in-Place Concrete" and that surfaces are free of cracks, ridges, depressions, scale, and foreign deposits.
 1. Moisture Testing: Perform tests so that each test area does not exceed **200 sq. ft.**, and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.
 - a. Anhydrous Calcium Chloride Test: ASTM F1869. Proceed with installation

- only after substrates have maximum moisture-vapor-emission rate of **3 lb of water/1000 sq. ft.** in 24 hours.
 - b. Relative Humidity Test: Using in situ probes, ASTM F2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level measurement.
 - c. Perform additional moisture tests recommended in writing by adhesive and carpet tile manufacturers. Proceed with installation only after substrates pass testing.
- D. Painted Subfloors: Perform bond test recommended in writing by adhesive manufacturer. Verify the following:
 - 1. Underlayment surface is flat, smooth, evenly planed, tightly jointed, and free of irregularities, gaps greater than **1/8 inch**, protrusions more than **1/32 inch**, and substances that may interfere with adhesive bond or show through surface.
- E. Access Flooring Systems: Verify the following:
 - 1. Access floor substrate is compatible with carpet tile and adhesive if any.
- F. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. General: Comply with CRI 104 and with carpet tile manufacturer's written installation instructions for preparing substrates.
- B. Use trowelable leveling and patching compounds, in accordance with manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions **1/8 inch** wide or wider, and protrusions more than **1/32 inch** unless more stringent requirements are required by manufacturer's written instructions.
- C. Concrete Substrates: Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by adhesive and carpet tile manufacturers.
- D. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 INSTALLATION

- A. General: Comply with CRI 104, Section 10, "Carpet Tile," and with carpet tile manufacturer's written installation instructions.
- B. Installation Method: As recommended in writing by carpet tile manufacturer.
- C. Maintain dye-lot integrity. Do not mix dye lots in same area.

- D. Maintain pile-direction patterns indicated on Drawings.
- E. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosings. Bind or seal cut edges as recommended in writing by carpet tile manufacturer.
- F. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.
- G. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on carpet tile as marked on subfloor. Use nonpermanent, nonstaining marking device.
- H. Install pattern parallel to walls and borders.
- I. Access Flooring: Stagger joints of carpet tiles so carpet tile grid is offset from access flooring panel grid. Do not fill seams of access flooring panels with carpet adhesive; keep seams free of adhesive.

3.4 CLEANING AND PROTECTION

- A. Perform the following operations immediately after installing carpet tile:
 - 1. Remove excess adhesive and other surface blemishes using cleaner recommended in writing by carpet tile manufacturer.
 - 2. Remove yarns that protrude from carpet tile surface.
 - 3. Vacuum carpet tile using commercial machine with face-beater element.
- B. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION 096813

SECTION 096900 - ACCESS FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cementitious-core steel panel access flooring.
2. Accessories.

1.2 DEFINITIONS

- A. ESD: Electrostatic discharge. The transfer of electric charge between bodies at different potentials, from panel surface to raised access-floor substructure.
- B. UFAD: Underfloor air distribution.

1.3 COORDINATION

- A. Coordinate locations, layout, and installation of electrical and mechanical work in underfloor cavity to prevent interference with access flooring.
1. Mark pedestal locations on subfloor to enable mechanical and electrical work to proceed without interfering with access-flooring pedestals installed after mechanical and electrical work.

1.4 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.
 - a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - b. Include loading capacities.

B. Shop Drawings:

1. Layout of access flooring and relationship to adjoining Work based on field-verified dimensions.
2. Details and sections with descriptive notes indicating materials, finishes, fasteners, typical and special edge conditions, accessories, and understructures.

- C. Samples for Initial Selection: Manufacturer's standard color sheets, showing full range of available colors for each type of exposed finish:

- D. Samples for Verification: For the following products:
1. Exposed Metal Accessories: Approximately **10 inches** in length.
 2. One full-size floor panel, pedestal, and understructure unit for each type of access flooring required.

1.5 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of access flooring.
- B. Product Test Reports: For each type of access-flooring panel material, for tests performed by a qualified testing agency.
- C. Qualification Statements: For Installer.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Entity that employs installers and supervisors who are trained and approved by manufacturer.

1.7 FIELD CONDITIONS

- A. Environmental Limitations: Do not install access flooring until spaces are enclosed, ambient temperature is between **50 and 90 deg F**, and relative humidity is not less than 20 and not more than 70 percent.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain products from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Access flooring to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.
- B. Structural Performance: Provide access flooring capable of complying with the following performance requirements in accordance with testing procedures in Cisca's "Recommended Test Procedures for Access Floors":
1. Concentrated Loads: **1000 lbf** with the following deflection and permanent set:
 - a. Top-Surface Deflection: **0.10 inch**.
 - b. Permanent Set: **0.010 inch**.

2. Ultimate Loads: 2000 lbf.
3. Rolling Loads: With local or overall deformation not to exceed 0.040 inch.
 - a. CISC Wheel 1: 10 passes at 800 lbf.
 - b. CISC Wheel 2: 10,000 passes at 600 lbf.
4. Stringer Load Test: 450 lbf at center of span with a permanent set not to exceed 0.010 inch.
5. Pedestal Axial Load Test: 6000 lbf.
6. Pedestal-Overturning-Moment Test: 1000 lbf x inches.
7. Uniform Load Test: 200 lbf/sq. ft. with a maximum top-surface deflection not to exceed 0.040 inch and a permanent set not to exceed 0.010 inch.
8. Drop Impact Load Test: 150 lb.

C. Fire Performance:

1. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.

2.3 CEMENTITIOUS-CORE STEEL PANEL ACCESS FLOORING

- A. Provide panels fabricated from cold-rolled steel sheet, with die-cut flat top sheet and die-formed and stiffened bottom pan welded together. Protect metal surfaces against corrosion using manufacturer's standard factory-applied finish. Completely fill internal spaces of completed units with manufacturer's standard cementitious material.
- B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 1. Computer Environments, Inc.
 2. Netfloor USA
 3. Tate Access Floors, Inc
- C. Configuration: Provide modular panels with nominal size of 24 by 24 inches, interchangeable with other field panels without disturbing adjacent panels or understructure.
- D. Attachment to Understructure: By gravity.

2.4 FABRICATION

- A. Fabrication Tolerances:
 1. Panel Size: Plus or minus 0.020 inch of required size.
 2. Squareness: Plus or minus 0.015 inch between diagonal measurements across

- top of panel.
3. Flatness: Plus or minus **0.035 inch**, measured on a diagonal on top of panel.
- B. Panel Markings: Clearly and permanently mark floor panels on their underside with panel type and concentrated-load rating.
- C. Bolted Panels: Provide panels with holes drilled in corners to align precisely with threaded holes in pedestal heads and to accept countersunk screws with heads flush with top of panel.
- D. Cutouts: Fabricate cutouts in floor panels for cable penetrations and service outlets. Provide reinforcement or additional support, if needed, to make panels with cutouts comply with structural performance requirements.
 1. Number, Size, Shape, and Location: As indicated on Drawings.

2.5 ACCESSORIES

- A. Pedestal System Understructure: System consisting of base, column with provisions for height adjustment, and head (cap); made of steel.
 1. Base: Square or circular base with not less than **16 sq. in.** of bearing area.
 2. Column: Of height required to bring finished floor to elevations indicated. Weld column to base plate.
 3. Provide vibration-proof leveling mechanism for making and holding fine adjustments in height over a range of not less than **2 inches** and for locking at a selected height, so deliberate action is required to change height setting and prevent vibratory displacement.
 4. Head: Designed to support the floor panel indicated.
 - a. Bolted Assemblies: Provide head with four holes aligned with holes in floor panels for bolting of panels to pedestals.
- B. Adhesives: Manufacturer's standard adhesive for bonding pedestal bases to subfloor.
- C. Service Outlets: Standard UL-listed and -labeled assemblies, for recessed mounting flush with top of floor panels; for power, communication, and signal services; and complying with the following requirements:
 1. Structural Performance: Cover capable of supporting a **300 lbf** concentrated load.
 2. Cover and Box Type: Grommet with twist-close cover and including steel junction box for electrical receptacle with provision for telephone connectors and signal cables.
 3. Location: In center of panel quadrant unless otherwise indicated.
 4. Receptacles and Wiring:
 - a. Electrical receptacles and wiring for service outlets are specified elsewhere.
- D. Perimeter Support: Where indicated, provide manufacturer's standard method for

supporting panel edge and forming transition between access flooring and adjoining floor coverings at same level as access flooring.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer and manufacturer's authorized representative present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
 - 1. Verify that substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of conditions and deleterious substances that might interfere with attachment of pedestals.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Lay out floor panel installation to keep the number of cut panels at floor perimeter to a minimum. Avoid using panels cut to less than **6 inches**.
- B. Locate each pedestal, complete any necessary subfloor preparation, and vacuum subfloor to remove dust, dirt, and construction debris before beginning installation.

3.3 INSTALLATION

- A. Install access flooring and accessories under supervision of access-flooring manufacturer's authorized representative to produce a rigid, firm installation that complies with performance requirements and is free of instability, rocking, rattles, and squeaks.
- B. Adhesive Attachment of Pedestals: Set pedestals in adhesive, in accordance with access-flooring manufacturer's written instructions, to provide full bearing of pedestal base on subfloor.
- C. Adjust pedestals so installed panels are flat, level, and at the proper height.
- D. Stringer Systems: Secure stringers to pedestal heads in accordance with access-flooring manufacturer's written instructions.
- E. Install flooring panels securely in place, leaving them properly seated with panel edges flush. Do not force panels into place.
- F. Scribe perimeter panels to provide a close fit, with adjoining construction having no voids greater than **1/8 inch** where panels abut vertical surfaces.
- G. Cut and trim access flooring and perform other dirt-or-debris-producing activities at a

remote location or as required to prevent contamination of subfloor under installed access flooring.

- H. Grounded Access Flooring: Ground in accordance with access-flooring manufacturer's written instructions and as needed to comply with performance requirements for electrical resistance of floor coverings.
 - 1. Panel-to-Understructure Resistance: Not more than 10 ohms as measured without floor coverings.
- I. Clean dust, dirt, and construction debris caused by floor installation, and vacuum subfloor area as installation of floor panels proceeds.
- J. Install access flooring without change in elevation between adjacent panels and within the following tolerances:
 - 1. Plus or minus **1/16 inch** in any **10 ft.** distance.
 - 2. Plus or minus **1/8 inch** from a level plane over entire access-flooring area.

3.4 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect access-flooring components, assemblies, and equipment installations, including connections.
- B. Prepare test and inspection reports.

3.5 PROTECTION

- A. Prohibit traffic on access flooring for 24 hours and removal of floor panels for 72 hours after installation, to allow pedestal adhesive to set.
- B. Replace access-flooring panels that are stained, scratched, or otherwise damaged or that do not comply with specified requirements.

3.6 DEMONSTRATION AND TRAINING

- A. Train Owner's maintenance personnel to adjust, operate, and maintain access flooring.
- B. Schedule demonstration and training session within 60 to 90 days after date of Substantial Completion.

END OF SECTION 096900

SECTION 099113 - EXTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: Surface preparation of exterior substrates and application of the following:
 - 1. Primers.
 - 2. Water-based finish coatings.
- B. Related Requirements:
 - 1. Section 051200 "Structural Steel Framing" for shop priming structural steel substrates.
 - 2. Section 055000 "Metal Fabrications" for shop priming metal fabrications.
 - 3. Section 055213 "Pipe and Tube Railings" for shop painting pipe and tube railings.
 - 4. Section 099123 "Interior Painting."

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include preparation requirements and application instructions.
 - 2. Indicate VOC content.
- B. Samples: For each type of topcoat product.
- C. Samples for Initial Selection: For each type of topcoat product.
- D. Samples for Verification: For each type of paint system and each color and gloss of topcoat. Submit actual paint drawdowns as specified below for verification Samples.
 - 1. Submit Samples on rigid backing, 8 inches square.
 - 2. Apply coats on Samples in steps to show each coat required for system.
 - 3. Label each coat of each Sample.
 - 4. Label each Sample for location and application area.
- E. Product List: Cross-reference to paint system and locations of application areas. Use same designations indicated on Drawings and in applicable exterior painting schedule articles to cross-reference paint systems specified in this Section. Include color designations.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.
 - 1. Maintain containers in clean condition, free of foreign materials and residue.
 - 2. Remove rags and waste from storage areas daily.

1.4 FIELD CONDITIONS

- A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F.
- B. Do not apply paints in snow, rain, fog, or mist; when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain each paint product from single source from single manufacturer.

2.2 EXTERIOR PAINTS, GENERAL

- A. Exterior Paints: Subject to compliance with requirements, available products that may be incorporated into the Work include but are not limited to products listed in product types below and applicable exterior painting schedule articles for the paint category indicated.
- B. Material Compatibility:
 - 1. Materials for use within each paint system must be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer based on testing and field experience.
 - 2. For each coat in a paint system, provide products recommended in writing by topcoat manufacturer for use in paint system and on substrate indicated.
- C. Colors: As indicated in a color schedule on Drawings.

2.3 PRIMERS

- A. Alkali-Resistant, Water-Based Primer: Water-based primer formulated for use on alkaline substrates.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include,

but are not limited to, the following:

- a. Benjamin Moore & Co.
 - b. PPG Paints; PPG Industries, Inc.
 - c. Sherwin-Williams Company (The)
- B. Latex Block Filler: Water-based, pigmented, high-solids, emulsion coating formulated to bridge and fill porous surfaces of CMU substrates in preparation for specified subsequent coatings.
 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Benjamin Moore & Co.
 - b. PPG Paints; PPG Industries, Inc.
 - c. Sherwin-Williams Company (The)

2.4 WATER-BASED FINISH COATINGS

- A. Exterior Latex Paint: Water-based, pigmented coating; formulated for alkali, mold, microbial, and water resistance and for use on exterior substrates.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Benjamin Moore & Co.
 - b. PPG Paints; PPG Industries, Inc.
 - c. Sherwin-Williams Company (The)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 1. Concrete: 12 percent.
 2. Masonry (Clay and CMU): 12 percent.
- C. Verify suitability of substrates, including surface conditions and compatibility, with finishes and primers. Proceed with coating application only after unsatisfactory conditions have been corrected.
 1. Application of coating indicates acceptance of substrates and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions applicable to substrates and paint systems indicated.
- B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection.
- C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems specified in this Section.
- D. Concrete Substrates: Remove release agents, curing compounds, efflorescence, and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces to be painted exceeds that permitted in manufacturer's written instructions.
- E. Masonry Substrates: Remove efflorescence and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces or mortar joints exceeds that permitted in manufacturer's written instructions.
- F. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and areas where shop paint is abraded. Paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed substrates.
- G. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized metal by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.
- H. Aluminum Substrates: Remove loose surface oxidation.

3.3 APPLICATION OF EXTERIOR PAINT PRODUCTS

- A. Apply paints in accordance with manufacturer's written instructions.
 - 1. Use applicators and techniques suited for paint and substrate indicated.
 - 2. Paint surfaces behind movable items same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed items with prime coat only.
 - 3. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
 - 4. Primers specified in applicable exterior painting schedule articles may be omitted on items that are factory primed or factory finished if compatible with intermediate and topcoat coatings and acceptable to intermediate and topcoat paint

manufacturers.

- B. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.
- C. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.
- D. Painting, Fire-Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:
 - 1. Paint the following work where exposed to view:
 - a. Equipment, including panelboards and switch gear.
 - b. Uninsulated metal piping.
 - c. Uninsulated plastic piping.
 - d. Pipe hangers and supports.
 - e. Metal conduit.
 - f. Plastic conduit.

3.4 FIELD QUALITY CONTROL

- A. Dry Film Thickness Testing: Owner may engage the services of a qualified testing and inspecting agency to inspect and test paint for dry film thickness.
 - 1. Touch up and restore painted surfaces damaged by testing.
 - 2. If test results show that dry film thickness of applied paint does not comply with paint manufacturer's written instructions, apply additional coats as needed to provide dry film thickness that complies with paint manufacturer's written instructions.
 - 3. Cost of retesting is Contractor's responsibility.

3.5 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
 - 1. Do not clean equipment with free-draining water and prevent solvents, thinners, cleaners, and other contaminants from entering into waterways, sanitary and storm drain systems, and ground.
 - 2. Dispose of contaminants in accordance with requirements of authorities having jurisdiction.
 - 3. Allow empty paint cans to dry before disposal.
 - 4. Collect waste paint by type and deliver to recycling or collection facility.
- B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.

- C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.6 EXTERIOR PAINTING SCHEDULE, CONCRETE SUBSTRATES

A. Vertical (Nontraffic) Surfaces:

- 1. Latex System:
 - a. Prime Coat: Alkali-resistant, water-based primer.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Exterior latex paint, flat.

3.7 EXTERIOR PAINTING SCHEDULE, MASONRY SUBSTRATES

A. CMU Substrates:

- 1. Latex System:
 - a. Prime Coat: Latex block filler.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Exterior latex paint, flat.

3.8 EXTERIOR PAINTING SCHEDULE, METAL SUBSTRATES

A. Steel and Iron Substrates:

- 1. Water-Based, Light Industrial Coating System:
 - a. Prime Coat: Acrylic metal primer.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Exterior, water-based, light industrial coating, low sheen.

B. Galvanized Metal Substrates:

- 1. Water-Based, Light Industrial Coating System:
 - a. Prime Coat: Water-based, galvanized-metal primer.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Exterior, water-based, light industrial coating, low sheen.

C. Aluminum (Not Anodized or Otherwise Coated) Substrates:

- 1. Water-Based, Light Industrial Coating System:

- a. Prime Coat: Quick-dry aluminum primer.
- b. Intermediate Coat: Matching topcoat.
- c. Topcoat: Exterior, water-based, light industrial coating, low sheen.

END OF SECTION 099113

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Water-based finish coatings.

B. Related Requirements:

1. Section 051200 "Structural Steel Framing" for shop priming structural steel.
2. Section 055000 "Metal Fabrications" for shop priming metal fabrications.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include preparation requirements and application instructions.

1. Indicate VOC content.

B. Samples: For each type of topcoat product.

C. Samples for Initial Selection: For each type of topcoat product.

D. Samples for Verification: For each type of paint system and each color and gloss of topcoat.

1. Submit Samples on rigid backing, **8 inches** square.
2. Apply coats on Samples in steps to show each coat required for system.
3. Label each coat of each Sample.
4. Label each Sample for location and application area.

E. Product Schedule: Use same designations indicated on Drawings and in the Interior Painting Schedule to cross-reference paint systems specified in this Section. Include color designations.

1.3 DELIVERY, STORAGE, AND HANDLING

A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than **45 deg F**.

1. Maintain containers in clean condition, free of foreign materials and residue.
2. Remove rags and waste from storage areas daily.

1.4 FIELD CONDITIONS

- A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between **50 and 95 deg F**.
- B. Do not apply paints when relative humidity exceeds 85 percent; at temperatures of less than **5 deg F** above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 PAINT PRODUCTS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Benjamin Moore & Co.
 - 2. Dunn-Edwards Corporation
 - 3. The Sherwin-Williams Company
- B. Source Limitations: Obtain each paint product from single source from single manufacturer.
- C. Material Compatibility:
 - 1. Materials for use within each paint system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 - 2. For each coat in a paint system, products shall be recommended in writing by topcoat manufacturers for use in paint system and on substrate indicated.
- D. Emissions Requirements: Field-applied paints and coatings that are inside the weatherproofing system shall comply with either of the following:
 - 1. Low-Emitting Materials: VOC emissions shall comply with the requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
 - 2. VOC content shall not exceed limits of authorities having jurisdiction and the following:
 - a. Flat Coatings: 50 g/L.
 - b. Nonflat Coatings: 100 g/L.
 - c. Primers, Sealers, and Undercoats: 100 g/L.
 - d. Shellacs, Clear: 730 g/L.
 - e. Shellacs, Pigmented: 550 g/L.
- E. Colors: As indicated in a color schedule.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - 1. Concrete: 12 percent.
 - 2. Fiber-Cement Board: 12 percent.
 - 3. Masonry (Clay and CMUs): 12 percent.
 - 4. Wood: 15 percent.
 - 5. Gypsum Board: 12 percent.
 - 6. Plaster: 12 percent.
- C. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.
- D. Plaster Substrates: Verify that plaster is fully cured.
- E. Spray-Textured Ceiling Substrates: Verify that surfaces are dry.
- F. Verify suitability of substrates, including surface conditions and compatibility, with existing finishes and primers.
- G. Proceed with coating application only after unsatisfactory conditions have been corrected.
 - 1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations applicable to substrates and paint systems indicated.
- B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.
- C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.

- D. Concrete Substrates: Remove release agents, curing compounds, efflorescence, and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces to be painted exceeds that permitted in manufacturer's written instructions.
- E. Masonry Substrates: Remove efflorescence and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces or mortar joints exceeds that permitted in manufacturer's written instructions.
- F. Steel Substrates: Remove rust, loose mill scale, and shop primer, if any. Clean using methods recommended in writing by paint manufacturer.
- G. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and areas where shop paint is abraded. Paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed surfaces.
- H. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized sheet metal by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.
- I. Aluminum Substrates: Remove loose surface oxidation.
- J. Wood Substrates:
 - 1. Scrape and clean knots, and apply coat of knot sealer before applying primer.
 - 2. Sand surfaces that will be exposed to view, and dust off.
 - 3. Prime edges, ends, faces, undersides, and backsides of wood.
 - 4. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.

3.3 INSTALLATION

- A. Apply paints according to manufacturer's written instructions.
 - 1. Use applicators and techniques suited for paint and substrate indicated.
 - 2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
 - 3. Paint front and backsides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
 - 4. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
 - 5. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.
- B. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.
- C. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

D. Painting Fire-Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:

1. Paint the following work where exposed in equipment rooms:
 - a. Equipment, including panelboards and switch gear.
 - b. Uninsulated metal piping.
 - c. Uninsulated plastic piping.
 - d. Pipe hangers and supports.
 - e. Metal conduit.
 - f. Plastic conduit.
 - g. Tanks that do not have factory-applied final finishes.
 - h. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.
2. Paint the following work where exposed in occupied spaces:
 - a. Equipment, including panelboards.
 - b. Uninsulated metal piping.
 - c. Uninsulated plastic piping.
 - d. Pipe hangers and supports.
 - e. Metal conduit.
 - f. Plastic conduit.
 - g. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.
 - h. Other items as directed by Architect.
3. Paint portions of internal surfaces of metal ducts, without liner, behind air inlets and outlets that are visible from occupied spaces.

3.4 FIELD QUALITY CONTROL

- A. Dry-Film Thickness Testing: Owner may engage the services of a qualified testing and inspecting agency to inspect and test paint for dry-film thickness.
1. Contractor shall touch up and restore painted surfaces damaged by testing.
 2. If test results show that dry-film thickness of applied paint does not comply with paint manufacturer's written recommendations, Contractor shall pay for testing and apply additional coats as needed to provide dry-film thickness that complies with paint manufacturer's written recommendations.

3.5 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
1. Do not clean equipment with free-draining water and prevent solvents, thinners, cleaners, and other contaminants from entering into waterways, sanitary and storm drain systems, and ground.

2. Dispose of contaminants in accordance with requirements of authorities having jurisdiction.
 3. Allow empty paint cans to dry before disposal.
 4. Collect waste paint by type and deliver to recycling or collection facility.
- B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.6 INTERIOR PAINTING SCHEDULE

A. Steel Substrates:

1. Latex over Shop-Applied Quick-Drying Shop Primer System :
 - a. Prime Coat: Quick-dry primer for shop application.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Interior, latex, semigloss.

B. Galvanized-Metal Substrates:

1. Latex System :
 - a. Prime Coat: Water-based galvanized primer.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Interior, latex, semigloss.

C. Plastic Substrates:

1. Latex System :
 - a. Prime Coat: Solvent-based bonding primer.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Interior, latex, semigloss.

D. Gypsum Board Substrates:

1. Latex over Latex Sealer System :
 - a. Prime Coat: Interior latex primer sealer.
 - b. Intermediate Coat: Matching topcoat.
 - c. Topcoat: Interior, latex, sheen as indicated.

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

INTERIOR PAINTING
SECTION 099123 - 7

END OF SECTION 099123

SECTION 102113.19 - PLASTIC TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid-plastic toilet compartments.

B. Related Requirements:

1. Section 092216 "Non-Structural Metal Framing" for blocking.
2. Section 102800 "Toilet, Bath, and Laundry Accessories" for accessories mounted on toilet compartments.

1.2 COORDINATION

- A. Coordinate requirements for blocking, reinforcing, and other supports concealed within wall to ensure that toilet compartments can be supported and installed as indicated.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Solid-plastic toilet compartments:
 - a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for toilet compartments.

B. Shop Drawings:

1. Include plans, elevations, sections, details, and attachment details.
2. Show locations of centerlines of toilet fixtures.
3. Show locations of floor drains.

C. Samples for Verification: Actual sample of finished products for each type of toilet compartment, hardware, and accessory.

1. Size: Manufacturer's standard size.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For toilet compartments.

1.5 FIELD CONDITIONS

- A. Field Measurements: Verify actual locations of toilet fixtures, walls, columns, ceilings, and other construction contiguous with toilet compartments by field measurements, and coordinate before fabrication.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain plastic toilet compartments from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire Performance: Tested in accordance with, and pass the acceptance criteria of, NFPA 286.
- B. Structural Performance: Where grab bars are mounted on toilet compartments, design panels to comply with the following requirements:
 - 1. Panels are able to withstand a concentrated load on grab bar of at least **250 lbf** applied at any direction and at any point, without deformation of panel.
- C. Regulatory Requirements: Comply with applicable provisions in the California Building Code 2022 (Vol 1 & 2) for toilet compartments designated as accessible.

2.3 SOLID-PLASTIC TOILET COMPARTMENTS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. ASI Global Partitions
 - 2. Hadrian Inc.; Zurn Industries, LLC
 - 3. Scranton Products
- B. Toilet-Enclosure Style: Overhead braced.
- C. Urinal-Screen Style: Wall hung.
- D. Door, Panel, and Pilaster Construction: Solid, high-density polyethylene (HDPE) material, not less than **1 inch** thick, seamless, with eased edges, and with homogenous color throughout thickness of material. Provide with no-sightline system consisting of door and pilaster lapped edges on strike side of door and door and pilaster lapped edges on hinge side of door (unless continuous hinge is used).
 - 1. Integral Hinges: Configure doors and pilasters to receive integral hinges.
 - 2. Color: One color in each room as selected by Architect from manufacturer's full

range.

- E. Urinal-Screen Construction: Matching panel construction.
- F. Brackets (Fittings):
 - 1. Stirrup Type: Ear or U-brackets, stainless steel.
 - 2. Full-Height (Continuous) Type: Manufacturer's standard design; stainless steel.

2.4 HARDWARE AND ACCESSORIES

- A. Door Hardware and Accessories: Manufacturer's operating hardware and accessories. Mount with through bolts.
 - 1. Hinges:
 - a. Manufacturer's standard hinge.
 - 2. Latch and Keeper: Manufacturer's surface-mounted latch unit, designed for emergency access, and with combination rubber-faced door strike and keeper. Provide units that comply with regulatory requirements for accessibility at toilet enclosures designated as accessible.
 - a. Material: Manufacturer's standard.
 - 3. Coat Hook: Manufacturer's combination hook and rubber-tipped bumper, sized to prevent inswinging door from hitting compartment-mounted accessories.
 - a. Material: Manufacturer's standard.
 - 4. Door Bumper: Manufacturer's rubber-tipped bumper at outswinging doors.
 - a. Material: Manufacturer's standard.
 - 5. Door Pull: Manufacturer's unit at outswinging doors that complies with regulatory requirements for accessibility. Provide units on both sides of doors at toilet enclosures designated as accessible.
 - a. Material: Manufacturer's standard.
- B. Overhead Bracing: Manufacturer's standard continuous, extruded-aluminum head rail with antigrip profile and in manufacturer's standard finish.
- C. Anchorages and Fasteners: Manufacturer's standard exposed fasteners of stainless steel, finished to match items they are securing, with theft-resistant-type heads. Provide sex-type bolts for through-bolt applications. For concealed anchors, use stainless steel, hot-dip galvanized steel, or other rust-resistant, protective-coated steel compatible with related materials.

2.5 MATERIALS

- A. Aluminum Castings: ASTM B26/B26M.
- B. Aluminum Extrusions: [ASTM B221](#).
- C. Stainless Steel Sheet: ASTM A240/A240M or ASTM A666, Type 304, stretcher-leveled standard of flatness.
- D. Stainless Steel Castings: ASTM A743/A743M.
- E. Zamac: ASTM B86, commercial zinc-alloy die castings.

2.6 FABRICATION

- A. Fabricate toilet compartment components to sizes indicated. Coordinate requirements and provide cutouts for through-partition toilet accessories where required for attachment of toilet accessories.
- B. Overhead-Braced Units: Manufacturer's standard corrosion-resistant supports, leveling mechanism, and anchors at pilasters and walls to suit floor and wall conditions. Provide shoes at pilasters to conceal supports and leveling mechanism.
- C. Floor-Anchored Units: Manufacturer's standard corrosion-resistant anchoring assemblies at pilasters and walls, with leveling adjustment nuts at pilasters for structural connection to floor. Provide shoes at pilasters to conceal anchorage.
- D. Door Size and Swings: Unless otherwise indicated, provide [24-inch-](#) wide, inswinging doors for standard toilet enclosures and [36-inch-](#) wide, outswinging doors with a minimum [32-inch-](#) wide, clear opening for toilet enclosures designated as accessible.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and conditions, with Installer present, for compliance with requirements for fastening, support, alignment, operating clearances, and other conditions affecting performance of the Work.
 - 1. Confirm location and adequacy of blocking and supports required for installation.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. General: Comply with manufacturer's written installation instructions. Install units rigid, straight, level, and plumb. Secure units in position with manufacturer's recommended anchoring devices.

1. Maximum Clearances:
 - a. Pilasters and Panels or Screens: **1/2 inch**.
 - b. Panels or Screens and Walls: **1 inch**.
 2. Stirrup Brackets: Secure panels or screens to walls and to pilasters with no fewer than three brackets attached at midpoint and near top and bottom of panel or screen.
 - a. Locate wall brackets, so holes for wall anchors occur in masonry or tile joints.
 - b. Align brackets at pilasters with brackets at walls.
 3. Full-Height (Continuous) Brackets: Secure panels or screens to walls and to pilasters with full-height brackets.
 - a. Locate bracket fasteners, so holes for wall anchors occur in masonry or tile joints.
 - b. Align brackets at pilasters with brackets at walls.
- B. Overhead-Braced Units: Secure pilasters to floor and level, plumb, and tighten. Set pilasters with anchors penetrating not less than **1-3/4 inches** into structural floor unless otherwise indicated in manufacturer's written instructions. Secure continuous head rail to each pilaster with no fewer than two fasteners. Hang doors to align tops of doors with tops of panels and adjust, so tops of doors are parallel with overhead brace when doors are in closed position.
- C. Urinal Screens: Attach with anchoring devices to suit supporting structure. Set units level and plumb, rigid, and secured to resist lateral impact.

3.3 ADJUSTING

- A. Hardware Adjustment: Adjust and lubricate hardware in accordance with hardware manufacturer's written instructions for proper operation. Set hinges on inswinging doors to hold doors open approximately 30 degrees from closed position when unlatched. Set hinges on outswinging doors to return doors to fully closed position.

END OF SECTION 102113.19

SECTION 102239 - FOLDING PANEL PARTITIONS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Operable acoustical panel partitions.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for supports that attach supporting tracks to overhead structural system.
2. Section 092900 "Gypsum Board" for fire-rated assemblies and sound barrier construction above the ceiling at track.

1.2 DEFINITIONS

A. NIC: Noise Isolation Class.

B. NRC: Noise Reduction Coefficient.

C. STC: Sound Transmission Class.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data:

1. Operable acoustical panel partitions.

B. Shop Drawings: For operable panel partitions.

1. Include plans, elevations, sections, attachment details, and numbered panel installation sequence.
2. Indicate stacking and operating clearances. Indicate location and installation requirements for hardware and track, blocking, and direction of travel.

C. Samples for Initial Selection: For each type of exposed material, finish, covering, or facing.

1. Include Samples of accessories involving color selection.

- D. Samples for Verification: For each type of exposed material, finish, covering, or facing, prepared on Samples of size indicated below:
 - 1. Panel Facing Material: Manufacturer's standard-size unit, not less than **3 inches** square.
 - 2. Panel Edge Material: Not less than **3 inches** long.
 - 3. Hardware: One of each exposed door-operating device.

1.5 INFORMATIONAL SUBMITTALS

- A. Setting Drawings: For embedded items and cutouts required in other work, including support-beam, mounting-hole template.
- B. Qualification Data: For Installer.
- C. Seismic Qualification Certificates: For operable panel partitions, tracks, accessories, and components, from manufacturer. Include seismic capacity of partition assemblies to remain in vertical position during a seismic event and the following:
 - 1. Basis for Certification: Indicate whether certification is based on analysis, testing, or experience data, in accordance with ASCE/SEI 7.
 - 2. Detailed description of partition anchorage devices on which the certification is based and their installation requirements.
- D. Product Certificates: For each type of operable panel partition.
 - 1. Include approval letter signed by manufacturer acknowledging Owner-furnished panel facing material complies with requirements.
- E. Product Test Reports: For each operable panel partition, for tests performed by a qualified testing agency.
- F. Field quality-control reports.
- G. Sample Warranty: For manufacturer's special warranty.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For operable panel partitions to include in maintenance manuals.
 - 1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:
 - a. Panel finish facings and finishes for exposed trim and accessories. Include precautions for cleaning materials and methods that could be detrimental to finishes and performance.
 - b. Seals, hardware, track, track switches, carriers, and other operating components.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Protectively package and sequence panels in order for installation. Clearly mark packages and panels with numbering system used on Shop Drawings. Do not use permanent markings on panels.

1.9 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of operable panel partitions that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Faulty operation of operable panel partitions.
 - b. Deterioration of metals, metal finishes, and other materials beyond normal use.
 - 2. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Operable panel partitions are to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.
 - 1. The term "withstand" means "the partition panels will remain in place without separation of any parts when subjected to the seismic forces specified."
- B. Acoustical Performance: Provide operable panel partitions tested by a qualified testing agency for the following acoustical properties in accordance with test methods indicated:
 - 1. Sound-Transmission Requirements: Operable panel partition assembly tested for laboratory sound-transmission loss performance in accordance with ASTM E90, determined by ASTM E413, and rated for not less than the STC indicated.
- C. Fire-Test-Response Characteristics: Provide panels with finishes complying with one of the following as determined by testing identical products by a testing and inspecting agency acceptable to authorities having jurisdiction:
 - 1. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing

agency.

- a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.
2. Fire Growth Contribution: Complying with acceptance criteria of local code and authorities having jurisdiction when tested in accordance with NFPA 265 Method B Protocol or NFPA 286.

2.2 OPERABLE ACOUSTICAL PANEL PARTITIONS

- A. Operable Acoustical Panel Partitions: Partition system, including panels, seals, finish facing, suspension system, operators, and accessories.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. KWIK-WALL Company
 - b. Moderco Inc
 - c. Modernfold, Inc
- B. Panel Operation: Manually operated, paired panels.
- C. Panel Construction: As required to support panel from suspension components and with reinforcement for hardware attachment. Fabricate panels with tight hairline joints and concealed fasteners. Fabricate panels so finished in-place partition is rigid; level; plumb; aligned, with tight joints and uniform appearance; and free of bow, warp, twist, deformation, and surface and finish irregularities.
- D. Dimensions: Fabricate operable acoustical panel partitions to form an assembled system of dimensions indicated and verified by field measurements.
 1. Panel Width: Standard widths.
- E. STC: Not less than 50.
- F. Panel Weight: 12 lb/sq. ft. maximum.
- G. Panel Thickness: Nominal dimension of 3 inches.
- H. Panel Materials:
 1. Steel Frame: Steel sheet, manufacturer's standard nominal minimum thickness for uncoated steel.
 2. Steel Face/Liner Sheets: Tension-leveled steel sheet, manufacturer's standard minimum nominal thickness for uncoated steel.
 3. Aluminum: Alloy and temper recommended by aluminum producer and finisher for type of use, corrosion resistance, and finish indicated; ASTM B221 for extrusions; manufacturer's standard strengths and thicknesses for type of use.

- a. Frame Reinforcement: Manufacturer's standard steel or aluminum.
- 4. Gypsum Board: ASTM C1396/C1396M.
- 5. Medium-Density Fiberboard: ANSI A208.2.
- I. Panel Closure: Manufacturer's standard unless otherwise indicated.
- J. Hardware: Manufacturer's standard as required to operate operable panel partition and accessories; with decorative, protective finish.
- K. Finish Facing: As indicated on Drawings.

2.3 SEALS

- A. Description: Seals that produce operable panel partitions complying with performance requirements and the following:
 - 1. Manufacturer's standard seals unless otherwise indicated.
 - 2. Seals made from materials and in profiles that minimize sound leakage.
 - 3. Seals fitting tight at contact surfaces and sealing continuously between adjacent panels and between operable panel partition perimeter and adjacent surfaces, when operable panel partition is extended and closed.
- B. Horizontal Top Seals: Continuous-contact, resilient seal exerting uniform constant pressure on track.
- C. Horizontal Bottom Seals:
 - 1. Resilient, mechanical, retractable, constant-force-contact seal exerting uniform constant pressure on floor when extended, ensuring horizontal and vertical sealing and resisting panel movement.
 - a. Automatically Operated for Acoustical Panels: Extension and retraction of bottom seal automatically operated by movement of partition, with operating range not less than **2 inches** between retracted seal and floor finish.

2.4 PANEL FINISH FACINGS

- A. Description: Finish facings for panels that comply with indicated fire-test-response characteristics and that are factory applied to operable panel partitions with appropriate backing, using mildew-resistant nonstaining adhesive as recommended by facing manufacturer's written instructions.
 - 1. Apply one-piece, seamless facings free of air bubbles, wrinkles, blisters, and other defects, with edges tightly butted, and with no gaps or overlaps. Horizontal seams are not permitted. Tightly secure and conceal raw and selvage edges of facing for finished appearance.
- B. Vinyl-Coated Fabric Wall Covering: Manufacturer's standard, mildew-resistant,

washable, vinyl-coated fabric wall covering; complying with W-101, Type III-Heavy Duty; Class A.

1. Total Weight: 30.0 oz./LY.
 2. Antimicrobial Treatment: Additives capable of inhibiting growth of bacteria, fungi, and yeasts.
 3. Color/Pattern: As indicated on Drawings.
- C. Trimless Edges: Fabricate exposed panel edges so finish facing wraps uninterrupted around panel, covering edge and resulting in an installed partition with facing visible on vertical panel edges, without trim, for minimal sightlines at panel-to-panel joints.

2.5 SUSPENSION SYSTEMS

- A. Tracks: Steel or aluminum with adjustable steel hanger rods for overhead support, designed for operation, size, and weight of operable panel partition indicated. Size track to support partition operation and storage without damage to suspension system, operable panel partitions, or adjacent construction. Limit track deflection to no more than **0.10 inch** between bracket supports. Provide a continuous system of track sections and accessories to accommodate configuration and layout indicated for partition operation and storage.
1. Panel Guide: Aluminum guide on both sides of the track to facilitate straightening of the panels; finished with factory-applied, decorative, protective finish.
 2. Head Closure Trim: As required for acoustical performance; with factory-applied, decorative, protective finish.
- B. Carriers: Trolley system as required for configuration type, size, and weight of partition and for easy operation; with ball-bearing wheels.
- C. Aluminum Finish: Mill finish or manufacturer's standard, factory-applied, decorative finish unless otherwise indicated.
- D. Steel Finish: Manufacturer's standard, factory-applied, corrosion-resistant, protective coating unless otherwise indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine flooring, floor levelness, structural support, and opening, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of operable panel partitions.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF OPERABLE PANEL PARTITIONS

- A. Install operable panel partitions and accessories after other finishing operations, including painting, have been completed in area of partition installation.
- B. Install panels in numbered sequence indicated on Shop Drawings.
- C. Broken, cracked, chipped, deformed, or unmatched panels are not acceptable.
- D. Broken, cracked, deformed, or unmatched gasketing or gasketing with gaps at butted ends is not acceptable.
- E. Light-Leakage Test: Illuminate one side of partition installation and observe vertical joints and top and bottom seals for voids. Adjust partitions for alignment and full closure of vertical joints and full closure along top and bottom seals.

3.3 FIELD QUALITY CONTROL

- A. NIC Testing: Engage a qualified testing agency to perform tests and inspections.
 - 1. Testing Extent: Testing agency is to randomly select one operable panel partition installation(s) for testing.
 - 2. Testing Methodology: Perform testing of installed operable panel partition for noise isolation in accordance with ASTM E336, determined by ASTM E413, and rated for not less than NIC indicated. Adjust and fit partitions to comply with NIC test method requirements.
- B. An operable panel partition installation will be considered defective if it does not pass tests and inspections.
- C. Prepare test and inspection reports.

3.4 ADJUSTING

- A. Adjust operable panel partitions, hardware, and other moving parts to function smoothly, and lubricate as recommended by manufacturer.
- B. Verify that safety devices are properly functioning.

3.5 MAINTENANCE SERVICE

- A. Maintenance Service: Beginning at Substantial Completion, maintenance service is to include six months' full maintenance by manufacturer's authorized service representative. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper operable-partition operation. Parts and supplies are to be manufacturer's authorized replacement parts and supplies.

3.6 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain operable panel partitions.

END OF SECTION 102239

SECTION 102600 - WALL AND DOOR PROTECTION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Corner guards.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, impact strength, dimensions of individual components and profiles, and finishes.

B. Samples for Initial Selection: For each type of impact-resistant wall-protection unit indicated, in each color and texture specified.

C. Samples for Verification: For each type of exposed finish on the following products, prepared on Samples of size indicated below:

1. Corner Guards: **12 inches** long. Include example top caps.

1.3 INFORMATIONAL SUBMITTALS

A. Material Certificates: For each type of exposed plastic material.

B. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of wall and door protection product to include in maintenance manuals.

1. Include recommended methods and frequency of maintenance for maintaining best condition of plastic covers under anticipated traffic and use conditions. Include precautions against using cleaning materials and methods that may be detrimental to finishes and performance.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Store wall and door protection in original undamaged packages and containers inside well-ventilated area protected from weather, moisture, soiling, extreme temperatures,

and humidity.

1. Maintain room temperature within storage area at not less than **70 deg F** during the period plastic materials are stored.
2. Keep plastic materials out of direct sunlight.
3. Store plastic wall- and door-protection components for a minimum of 72 hours, or until plastic material attains a minimum room temperature of **70 deg F**.
 - a. Store corner-guard covers in a vertical position.

1.6 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of wall- and door-protection units that fail in materials or workmanship within specified warranty period.
 1. Failures include, but are not limited to, the following:
 - a. Structural failures including detachment of components from each other or from the substrates, delamination, and permanent deformation beyond normal use.
 - b. Deterioration of metals, metal finishes, plastics, and other materials beyond normal use.
 2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain wall- and door-protection products of each type from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Surface Burning Characteristics: Comply with ASTM E84 or UL 723; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 1. Flame-Spread Index: 25 or less.
 2. Smoke-Developed Index: 450 or less.
- B. Regulatory Requirements: Comply with applicable provisions in the California Building Code 2022 (Vol 1 & 2).

2.3 CORNER GUARDS

- A. Surface-Mounted, Plastic-Cover Corner Guards: Manufacturer's standard assembly consisting of snap-on, resilient plastic cover installed over retainer; including mounting hardware; fabricated with 90- or 135-degree turn to match wall condition.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Construction Specialties, Inc.
 - b. Koroseal Interior Products, LLC
 - c. Pawling Corporation
 - 2. Cover: Extruded rigid plastic, minimum 0.078-inch wall thickness; as follows:
 - a. Profile: Nominal 2-inch- long leg and 1/4-inch corner radius.
 - b. Height: 4 feet.
 - c. Color and Texture: As selected by Architect from manufacturer's full range.
 - 3. Continuous Retainer: Minimum 0.060-inch- thick, one-piece, extruded aluminum.
 - 4. Retainer Clips: Manufacturer's standard impact-absorbing clips.
 - 5. Top and Bottom Caps: Prefabricated, injection-molded plastic; color matching cover; field adjustable for close alignment with snap-on cover.

2.4 MATERIALS

- A. Plastic Materials: Chemical- and stain-resistant, high-impact-resistant plastic with integral color throughout; extruded and sheet material as required, thickness as indicated.
- B. Solid Wood: Clear hardwood lumber of species indicated, free of appearance defects, and selected for compatible grain and color.
 - 1. Hardwood Plywood: 0.05 ppm.
 - 2. Particleboard: 0.09 ppm.
 - 3. MDF More Than 5/16 Inch Thick: 0.11 ppm.
 - 4. MDF 5/16 Inch or Less in Thickness: 0.13 ppm.
- C. Fasteners: Aluminum, nonmagnetic stainless-steel, or other noncorrosive metal screws, bolts, and other fasteners compatible with items being fastened. Use security-type fasteners where exposed to view.
- D. Adhesive: As recommended by protection product manufacturer.

2.5 FABRICATION

- A. Fabricate wall and door protection according to requirements indicated for design, performance, dimensions, and member sizes, including thicknesses of components.

- B. Factory Assembly: Assemble components in factory to greatest extent possible to minimize field assembly. Disassemble only as necessary for shipping and handling.
- C. Quality: Fabricate components with uniformly tight seams and joints and with exposed edges rolled. Provide surfaces free of wrinkles, chips, dents, uneven coloration, and other imperfections. Fabricate members and fittings to produce flush, smooth, and rigid hairline joints.

2.6 FINISHES

- A. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and wall areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine walls to which wall and door protection will be attached for blocking, grounds, and other solid backing that have been installed in the locations required for secure attachment of support fasteners.
 - 1. For wall and door protection attached with adhesive, verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Complete finishing operations, including painting, before installing wall and door protection.
- B. Before installation, clean substrate to remove dust, debris, and loose particles.

3.3 INSTALLATION

- A. Installation Quality: Install wall and door protection according to manufacturer's written instructions, level, plumb, and true to line without distortions. Do not use materials with chips, cracks, voids, stains, or other defects that might be visible in the finished Work.

- B. Accessories: Provide splices, mounting hardware, anchors, trim, joint moldings, and other accessories required for a complete installation.
 - 1. Provide anchoring devices and suitable locations to withstand imposed loads.
 - 2. Adjust top caps as required to ensure tight seams.

3.4 CLEANING

- A. Immediately after completion of installation, clean plastic covers and accessories using a standard ammonia-based household cleaning agent.

END OF SECTION 102600

SECTION 102800 - TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Public-use washroom accessories.
2. Public-use shower room accessories.
3. Underlavatory guards.
4. Custodial accessories.

B. Related Requirements:

1. Section 088300 "Mirrors" for frameless mirrors.

1.2 COORDINATION

- A. Coordinate accessory locations with other work to prevent interference with clearances required for access by people with disabilities, and for proper installation, adjustment, operation, cleaning, and servicing of accessories.
- B. Deliver inserts and anchoring devices set into concrete or masonry as required to prevent delaying the Work.

1.3 ACTION SUBMITTALS

A. Product Data: For each product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Include anchoring and mounting requirements, including requirements for cutouts in other work and substrate preparation.

B. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.

1. Identify locations using room designations indicated.
2. Identify accessories using designations indicated.

1.4 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For manufacturer's special warranties.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For accessories to include in maintenance manuals.

1.6 WARRANTY

- A. Manufacturer's Special Warranty for Mirrors: Manufacturer agrees to repair or replace mirrors that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, visible silver spoilage defects.
 - 2. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 OWNER-FURNISHED MATERIALS

- A. Owner-Furnished Materials: Paper Towel Dispensers, Soap Dispensers, and Toilet Tissue Dispensers.

2.2 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Design accessories and fasteners to comply with the following requirements:
 - 1. Grab Bars: Installed units are able to resist **250 lbf** concentrated load applied in any direction and at any point.
 - 2. Shower Seats: Installed units are able to resist **250 lbf** concentrated load applied in any direction and at any point.

2.3 PUBLIC-USE WASHROOM ACCESSORIES

- A. Source Limitations: Obtain public-use washroom accessories from single source from single manufacturer.
- B. Grab Bar:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
 - 2. Mounting: Flanges with concealed fasteners.
 - 3. Material: Stainless steel, **0.05 inch** thick.

- a. Finish: Smooth, ASTM A480/A480M No. 4 finish (satin).
4. OD: 1-1/2 inches.
5. Configuration and Length: As indicated on Drawings.
- C. Sanitary-Napkin Disposal Unit:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
 2. Mounting: Surface mounted.
 3. Door or Cover: Self-closing, disposal-opening cover and hinged face panel with tumbler lockset.
 4. Receptacle: Removable.
 5. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
- D. Seat-Cover Dispenser:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
 2. Mounting: Surface mounted.
 3. Minimum Capacity: 250 seat covers.
 4. Exposed Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
- E. Mirror Unit:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
 2. Frame: Stainless steel channel.
 - a. Corners: Manufacturer's standard.
 3. Size: As indicated on Drawings.

4. Hangers: Manufacturer's standard rigid, tamper and theft resistant.

F. Hook:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
2. Description: Combination hat and coat hook.
3. Mounting: Concealed.
4. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

2.4 PUBLIC-USE SHOWER ROOM ACCESSORIES

- A. Source Limitations: Obtain public-use shower room accessories from single source from single manufacturer.

B. Shower Curtain Rod:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
2. Description: 1-inch- OD, straight rod.
3. Configuration: As indicated on Drawings.
4. Mounting Flanges: Concealed fasteners; in manufacturer's standard material and finish.
5. Rod Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

C. Folding Shower Seat:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
2. Configuration: L-shaped seat, designed for wheelchair access.
3. Seat: Phenolic or polymeric composite of slat-type or one-piece construction in color as selected by Architect.

4. Mounting Mechanism: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
5. Dimensions: 26" x 22-1/2".

D. Robe Hook:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
2. Description: Double-prong three hook strip unit.
3. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

2.5 UNDERLAVATORY GUARDS

A. Underlavatory Guard:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Plumberex Specialty Products, Inc.
 - b. Truebro; IPS Corporation
2. Description: Insulating pipe covering for supply and drain piping assemblies that prevents direct contact with and burns from piping; allow service access without removing coverings.
3. Material and Finish: Antimicrobial, molded plastic, white.

2.6 CUSTODIAL ACCESSORIES

A. Source Limitations: Obtain custodial accessories from single source from single manufacturer.

B. Custodial Mop and Broom Holder:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. ASI-American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc
 - c. Bradley Corporation
2. Description: Unit with shelf, hooks, holders, and rod suspended beneath shelf.
3. Length: 36 inches.
4. Hooks: Three.

5. Mop/Broom Holders: Four, spring-loaded, rubber hat, cam type.
6. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
 - a. Shelf: Not less than nominal ~~0.05-inch~~ thick stainless steel.
 - b. Rod: Approximately ~~1/4-inch~~ diameter stainless steel.

2.7 FABRICATION

- A. General: Fabricate units with tight seams and joints, and exposed edges rolled. Hang doors and access panels with full-length, continuous hinges. Equip units for concealed anchorage and with corrosion-resistant backing plates.
- B. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner's representative.

PART 3 - EXECUTION

3.1 INSTALLATION OF TOILET, BATH, AND LAUNDRY ACCESSORIES

- A. Install accessories in accordance with manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.
 1. Remove temporary labels and protective coatings.
- B. Grab Bars: Install to comply with specified structural-performance requirements.
- C. Shower Seats: Install to comply with specified structural-performance requirements.

3.2 ADJUSTING AND CLEANING

- A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.
- B. Clean and polish exposed surfaces in accordance with manufacturer's written instructions.

END OF SECTION 102800

SECTION 104413 - FIRE PROTECTION CABINETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fire-protection cabinets for the following:
 - a. Portable fire extinguisher.

B. Related Requirements:

1. Section 104416 "Fire Extinguishers" for portable, hand-carried fire extinguishers accommodated by fire-protection cabinets.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Show door hardware, cabinet type, trim style, and panel style. Include roughing-in dimensions and details showing recessed-, semirecessed-, or surface-mounting method and relationships of box and trim to surrounding construction.

B. Shop Drawings: For fire-protection cabinets.

1. Include plans, elevations, sections, details, and attachments to other work.

C. Samples: For each type of exposed finish required.

D. Samples for Initial Selection: For each type of exposed finish required.

E. Samples for Verification: For each type of exposed finish required, prepared on samples **6 by 6 inches** square.

F. Product Schedule: For fire-protection cabinets. Indicate whether recessed, semirecessed, or surface mounted. Coordinate final fire-protection cabinet schedule with fire-extinguisher schedule to ensure proper fit and function.

1.3 CLOSEOUT SUBMITTALS

A. Maintenance Data: For fire-protection cabinets to include in maintenance manuals.

1.4 COORDINATION

- A. Coordinate size of fire-protection cabinets to ensure that type and capacity of fire extinguishers indicated are accommodated.
- B. Coordinate sizes and locations of fire-protection cabinets with wall depths.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain fire-protection cabinets, accessories, and fire extinguishers from single source from single manufacturer.

2.2 FIRE-PROTECTION CABINET

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. JL Industries; Activar Construction Products Group, Inc.
 - 2. Larsen's Manufacturing Company
- B. Fire-Protection Cabinet Type: Suitable for fire extinguisher.
- C. Cabinet Construction: Nonrated.
- D. Cabinet Material: Aluminum sheet.
 - 1. Shelf: Same metal and finish as cabinet.
- E. Semirecessed Cabinet: One-piece combination trim and perimeter door frame overlapping surrounding wall surface, with exposed trim face and wall return at outer edge (backbend).
 - 1. Square-Edge Trim: 1-1/4- to 1-1/2-inch backbend depth.
- F. Cabinet Trim Material: Same material and finish as door.
- G. Door Material: Aluminum sheet.
- H. Door Style: Fully glazed panel with frame.
- I. Door Glazing: Tempered float glass (clear).
- J. Door Hardware: Manufacturer's standard door-operating hardware of proper type for cabinet type, trim style, and door material and style indicated.
 - 1. Provide projecting door pull and friction latch.

2. Provide manufacturer's standard hinge, permitting door to open 180 degrees.

K. Materials:

1. Aluminum: **ASTM B221** for extruded shapes and aluminum sheet, with strength and durability characteristics of not less than Alloy 6063-T5 for aluminum sheet.
 - a. Finish: Clear anodic.
2. Tempered Float Glass: ASTM C1048, Kind FT, Condition A, Type I, Quality q3, 3 mm thick, Class 1 (clear).

2.3 FABRICATION

- A. Fire-Protection Cabinets: Provide manufacturer's standard box (tub) with trim, frame, door, and hardware to suit cabinet type, trim style, and door style indicated.
 1. Weld joints and grind smooth.
 2. Miter corners and grind smooth.
 3. Provide factory-drilled mounting holes.
- B. Cabinet Doors: Fabricate doors according to manufacturer's standards, from materials indicated and coordinated with cabinet types and trim styles.
 1. Fabricate door frames with tubular stiles and rails and hollow-metal design, minimum **1/2 inch** thick.
 2. Miter and weld perimeter door frames and grind smooth.
- C. Cabinet Trim: Fabricate cabinet trim in one piece with corners mitered, welded, and ground smooth.

2.4 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM's AMP 500, "Metal Finishes Manual for Architectural and Metal Products," for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces of fire-protection cabinets from damage by applying a strippable, temporary protective covering before shipping.
- C. Finish fire-protection cabinets after assembly.
- D. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine walls and partitions for suitable framing depth and blocking where semirecessed cabinets will be installed.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare recesses for semirecessed fire-protection cabinets as required by type and size of cabinet and trim style.

3.3 INSTALLATION OF FIRE-PROTECTION CABINETS

- A. General: Install fire-protection cabinets in locations and at mounting heights indicated or, if not indicated, at height indicated below:
 - 1. Fire-Protection Cabinet Mounting Height: 42 inches above finished floor to top of fire extinguisher.
- B. Fire-Protection Cabinets: Fasten cabinets to structure, square and plumb.

3.4 ADJUSTING AND CLEANING

- A. Remove temporary protective coverings and strippable films, if any, as fire-protection cabinets are installed unless otherwise indicated in manufacturer's written installation instructions.
- B. Adjust fire-protection cabinet doors to operate easily without binding. Verify that integral locking devices operate properly.
- C. On completion of fire-protection cabinet installation, clean interior and exterior surfaces as recommended by manufacturer.
- D. Touch up marred finishes, or replace fire-protection cabinets that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by fire-protection cabinet and mounting bracket manufacturers.
- E. Replace fire-protection cabinets that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 104413

SECTION 104416 - FIRE EXTINGUISHERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes portable, hand-carried fire extinguishers.
- B. Related Requirements:
 - 1. Section 104413 "Fire Protection Cabinets."

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include rating and classification, material descriptions, dimensions of individual components and profiles, and finishes for fire extinguisher.
- B. Product Schedule: For fire extinguishers. Coordinate final fire-extinguisher schedule with fire-protection cabinet schedule to ensure proper fit and function.

1.3 INFORMATIONAL SUBMITTALS

- A. Warranty: Sample of special warranty.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fire extinguishers to include in maintenance manuals.

1.5 COORDINATION

- A. Coordinate type and capacity of fire extinguishers with fire-protection cabinets to ensure fit and function.

1.6 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace fire extinguishers that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Failure of hydrostatic test according to NFPA 10 when testing interval

- required by NFPA 10 is within the warranty period.
- b. Faulty operation of valves or release levers.

- 2. Warranty Period: Six years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. NFPA Compliance: Fabricate and label fire extinguishers to comply with NFPA 10, "Portable Fire Extinguishers."
- B. Fire Extinguishers: Listed and labeled for type, rating, and classification by an independent testing agency acceptable to authorities having jurisdiction.

2.2 PORTABLE, HAND-CARRIED FIRE EXTINGUISHERS

- A. Fire Extinguishers: Type, size, and capacity for each fire-protection cabinet indicated.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. JL Industries; Activar Construction Products Group, Inc.
 - b. Larsen's Manufacturing Company
 - 2. Source Limitations: Obtain fire extinguishers, fire-protection cabinets, and accessories, from single source from single manufacturer.
 - 3. Valves: Manufacturer's standard.
 - 4. Handles and Levers: Manufacturer's standard.
 - 5. Instruction Labels: Include pictorial marking system complying with NFPA 10, Appendix B.
- B. Multipurpose Dry-Chemical Type in Steel Container , typical: UL-rated 2-A:10-B:C, [5-lb](#) nominal capacity, with monoammonium phosphate-based dry chemical in enameled-steel container.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine fire extinguishers for proper charging and tagging.
 - 1. Remove and replace damaged, defective, or undercharged fire extinguishers.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. General: Install fire extinguishers in locations indicated and in compliance with requirements of authorities having jurisdiction.

END OF SECTION 104416

SECTION 115213 - PROJECTION SCREENS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Manually operated, front-projection screens.
2. Electrically operated, front-projection screens.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for metal support framing for front-projection screens.
2. Section 061000 "Rough Carpentry" for wood backing for screen installation.

1.2 DEFINITIONS

- A. ALR: Ambient-light rejection; for specular reflective viewing surfaces, measured as the percentage of ambient light striking the viewing surface that has equal angles of incidence and reflection.
- B. Gain: Ratio of light reflected from viewing-surface material to that reflected perpendicularly from a magnesium carbonate surface as determined in accordance with SMPTE RP 94.
- C. Half-Gain Angle: The angle, measured from the axis of the viewing surface to the most central position on a perpendicular plane through the horizontal centerline of the viewing surface, where the gain is half of the peak gain.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show layouts and types of front-projection screens. Include the following:

1. Drop heights.
2. Location of seams in viewing surfaces.
3. For end-mounted motors, location of screen centerline relative to ends of screen case.
4. Anchorage details, including connection to supporting structure for suspended units.
5. Details of juncture of screen case or trim with adjacent finishes.
6. For electrically operated units, wiring diagrams and location of wiring connections.

7. Accessories.

- C. Samples: For each type of exposed finish and for each color and finish specified, in manufacturer's standard sizes.
- D. Product Schedule: For front-projection screens. Use same designations indicated on Drawings.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For front-projection screens to include in maintenance manuals.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Environmental Limitations: Do not deliver front-projection screens until spaces are enclosed and weathertight, wet-work in installation spaces is complete and dry, and temporary or permanent HVAC system is operating and maintaining ambient temperature and humidity conditions planned for building occupants during the remainder of the construction period.
- B. Store front-projection screens in manufacturer's protective packaging and according to manufacturer's written instructions.

1.6 COORDINATION

- A. Coordinate layout and installation of front-projection screens with adjacent construction, including ceiling suspension systems, light fixtures, HVAC system components, fire-suppression system, and partitions.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Source Limitations for Projection Screens: Obtain front-projection screens from single manufacturer. Obtain viewing surfaces and accessories, including mounting hardware, from screen manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Viewing-Surface and Masking Materials:
 - 1. Mildew-Resistance Rating: Zero or 1 when tested in accordance with ASTM G21.
 - 2. Flame Resistance: Passes NFPA 701.
 - 3. Flame-Spread Index: Not greater than 75 when tested in accordance with ASTM E84.

2.3 ELECTRICALLY OPERATED, FRONT-PROJECTION SCREENS

- A. General Requirements: Manufacturer's standard units, consisting of case, screen, motor, controls, mounting accessories, and other components necessary for a complete installation.
 - 1. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
 - 2. Screen Mounting: Top edge securely anchored to rigid metal roller and bottom edge formed into a pocket holding a metal rod, with ends of rod protected by plastic caps.
- B. Suspended, Electrically Operated Screen: Unit designed and fabricated for suspended mounting.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Draper, Inc.
 - b. Legrand AV Inc.; Legrand North America, LLC
 - 2. Motor in Roller: Instant-reversing motor of size and capacity recommended in writing by screen manufacturer; with permanently lubricated ball bearings, automatic thermal-overload protection, preset limit switches to automatically stop screen in up and down positions, and positive-stop action to prevent coasting. Mount motor inside roller with vibration isolators to reduce noise transmission.
 - 3. Wiring Compartment: Metal or metal lined.
 - 4. Controls: Remote, key-operated, three-position control switch installed in recessed device box with flush cover plate matching other electrical device cover plates in room where switch is installed.
 - a. Provide with one control switch.
 - b. Provide power supply for low-voltage systems if required.
 - 5. Screen Case: Metal.
 - a. Ceiling Aperture: With closure, hinged to automatically open when screen is lowered and automatically close when screen is fully raised.
 - 1) Provide screen case with trim flange to receive ceiling finish.
 - b. Finish on Exposed Surfaces: Manufacturer's standard.
 - 6. Free-Hanging, Matte Viewing Surface: White, 1.0 minimum peak gain and 60-degree minimum half-gain angle.
 - a. Edge Treatment: Manufacturer's standard masking borders.
 - 7. Size of Viewing Surface: As indicated in schedule on Drawings.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install front-projection screens at locations indicated on Drawings to comply with screen manufacturer's written instructions.
- B. Install front-projection screens with screen cases in position and in relation to adjoining construction indicated. Securely anchor them to supporting substrate in a manner that produces a smoothly operating screen that, when lowered, has flat viewing surface and plumb vertical edges.
 - 1. Install low-voltage controls in accordance with NFPA 70 and complying with manufacturer's written instructions.
 - a. Wiring Method: Install wiring in raceway, except in accessible ceiling spaces and in gypsum board partitions, where unenclosed wiring method may be used. Use UL-listed plenum cable in environmental air spaces, including plenum ceilings. Conceal raceway and cables, except in unfinished spaces.
 - 2. Test electrically operated units to verify that screen controls, limit switches, closures, and other operating components are in optimum functioning condition.
 - 3. Test manually operated units to verify that screen-operating components are in optimum functioning condition.

END OF SECTION 115213

SECTION 22 00 00 - PLUMBING

PART 1 - GENERAL

1.1 GENERAL MECHANICAL PROVISIONS

- A. The General Mechanical Provisions, Section 23 00 00, shall form a part of this Section with the same force and effect as though repeated here.

1.2 SCOPE:

- A. Included: Provide all labor, materials and services necessary for complete, lawful and operating systems as shown or noted on the drawings or as specified here. The work includes, but is not necessarily limited to, the following:
1. Sanitary sewer system.
 2. Domestic water system.
 3. Drain system (including condensate drain).
 4. Fuel gas system.
 5. All equipment as shown or noted on the drawings or as specified.
 6. Demolition as indicated on drawings. Where demolition is called for, remove all equipment, piping, braces, housekeeping pads, supports and related items no longer required.
 7. Lead Free: All equipment, fixtures, valves and fixture stops providing water for human consumption installed after January 1, 2010, must meet the "Lead Free" requirements for the State of California.
- B. Work Specified Elsewhere:
1. Line voltage power wiring, disconnect switches and installation of all starters are included in the Electrical Section unless otherwise noted.
 2. Access doors.
 3. Concrete and reinforcing steel unless specifically called for on the drawings or specifications.
 4. Painting unless specifically called for in the drawings or specifications.
 5. Carpentry.
 6. Control of circulating pumps, etc.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS:

- A. Sanitary Sewer:
1. Soil, Waste and Vent Piping (Non-Pressurized):
 - a. Inside Building and Within Five Feet of Building Walls: Standard weight coated cast iron pipe and fittings. Plain end, CISPI 301,

ASTM A888, or hub end with rubber gaskets, ASTM A74, ASTM C564. ABI, Tyler, Charlotte. Couplings shall be heavy-duty shielded couplings. Type 304 stainless steel, with neoprene gasket, ASTM C1540. Husky HD 2000, Clamp-All 80, Mission HeavyWeight. MG Couplings are also acceptable. 2" and smaller exposed to view shall be galvanized steel, ASTM A53, with coated cast iron recessed drainage fittings, ANSI B16.12.

Below grade cast iron pipe and fittings shall have 8 mil (minimum) Polyethylene Encasement (Poly Wrap), Per ANSI/AWWA C105/A21.5.

- b. Outside Building: Polyvinyl chloride (PVC), SDR-35, ASTM D3034 with PVC fittings with rubber ring joints. Piping within 10 feet of water piping shall be solid wall Schedule 40 PVC, ASTM D1785, D2665, with solvent weld DWV fittings, ASTM D2665, D3311. Piping with less than 24" of cover outside building walls shall be cast iron.
2. Cleanouts: Comparable models of Josam, Wade, Mifab or Zurn are acceptable. Grease plug prior to installation. Floor Cleanouts: Smith 4023 with nickel bronze top in finished areas; Smith 4223 in utility areas. Wall Cleanouts: Smith 4532 with stainless steel cover and screw. Pipe Cleanouts: Iron body with threaded brass plug. Site cleanouts more than 5' outside building may be PVC with PVC plug.
3. Cleanout Box: Precast reinforced concrete. Cast iron lid marked for service. Christy F8 in foot traffic areas; G5 in roadways. Provide with PVC pipe extension down to top of pipe.

B. Water and Gas:

1. Hot and Cold Water Piping: Materials used in the water system, except valves and similar devices, shall be of like material, except where otherwise approved by Engineer and Authority Having Jurisdiction, prior to start of work.
 - a. Inside Building, Within Five Feet of Building Walls, and All Above Grade:
 - (1) Hard temper seamless copper, ASTM B88. Wrought copper fittings, ANSI B16.22. Type L with brazed joints (1100F, min.). 1-1/2" and smaller above grade may be soldered, lead-free solder. All nipples shall be lead-free red brass (85% copper). Branch piping from the cold water main above the ceiling to roof mounted hose bibbs shall be type "K" copper. Above grade fittings may be copper press fittings, ASME B16.18 or ASME B16.22. EPDM O-rings. Installation shall be in accordance with the manufacturer's installation instructions. ProPress, Apollo, Mueller Streamline.
 - b. Outside Building - Below Grade:
 - (1) Same as Inside Building.

- or- (2) 3" and Smaller: Schedule 80 Polyvinyl chloride (PVC), ASTM D1785, with Schedule 80 PVC solvent weld fittings, ASTM D2467 where approved by administrative authority.
 - or- (3) 4" and Larger: Polyvinyl chloride, AWWA C900, DR18, ASTM D1784, ASTM D2241, where approved by administrative authority, cast or ductile iron fittings, AWWA C110 or C153, Class 150, with rubber ring joints, ASTM D1869.
2. Gas Piping: (For Capping of Piping). Black or galvanized to match existing. Paint black piping exposed to weather.
- a. Inside Building and All Above Grade: 2" and Smaller: Schedule 40 steel pipe, ASTM A53. 150 psi galvanized malleable iron screwed fittings, ANSI B16.3, ANSI B31.8. 2-1/2" through 4": May be screwed pipe as above or welded pipe as below. 6" and larger: Schedule 40 steel pipe, ASTM A53. Standard weight carbon steel welding fittings, long radius ells, ANSI B16.9.
3. Valves and Specialties:
- a. Valves:
 - (1) General: Manufacturer's model numbers are listed to complete description. Equivalent models of Crane, Kitz, Milwaukee, Nibco, Stockham, Walworth or Watts are acceptable. All valves of a particular type or for a particular service shall be by the same manufacturer. Butterfly valves may be substituted for 2-1/2" and larger gate valves above grade; see specification below. Provide a minimum of two operating "T" handles for underground valves for each underground system where valves are required. The lengths of the handles are dependent upon the depth of the valves and the ability of the handles to fully open and/or close the valves. At least one "T" handle for each system shall be on site at the beginning of the installation of a particular system for emergencies, and the Construction Manager shall have access to these "T" handles and valves.
 - (2) Gate Valve: 2" and Smaller: All bronze. Non-rising stem. Threaded bonnet. Wedge disk. Malleable iron handwheel. 200 psi CWP. Nibco T-113-LF. 2-1/2" and Larger: Iron body, bronze mounted. Non-rising stem. Resilient wedge disk. 200 psi CWP. Flanged or AWWA hub end as applicable. Nibco F-619-RWS. Underground valves shall have square operating nut.
 - (3) Butterfly Valve: Ductile iron threaded lug body. Aluminum bronze disk. EPDM molded-in liner and seals. 416 stainless steel shaft. 6" and smaller valves shall have multi-position lever handle. 8" and larger valves shall have gear operator. Provide 2" extension neck at insulated pipes. Nibco LD-2000.
 - (4) Check Valve: Lead-free bronze swing check, regrinding.

200 psi CWP. Nibco T-413-Y-LF. For vertical applications use lead-free bronze, spring-loaded, lift-type. Nibco T-480-Y-LF.

- (5) Ball Valve: Full port. Lead free brass body, cap, stem, disk and ball. Screwed connection. Lever handle. PTFE seat and stem packing. Min. 400 psi CWP. CSA-US and UL listed. Nibco T-FP-600A-LF.
- (6) Plug Valve: Valves in gas piping systems must be UL or CSA listed for gas distribution. 4" and Smaller: Eccentric bronze or nickel-plated semi-steel plug. Semi-steel body. Bronze bushings. Buna-N-rings. 175 psi WOG. KeyPort Valve Series 400. 2" and smaller above grade may be listed full port ball valves, except in publicly accessible locations. Apollo, Jomar, Nibco. 6" and Larger: Lubricated plug cock. Cast iron or semi-steel body and plug. 200 psi WOG. Flanged. Wrench handle. Provide one operating "T" handle for underground valves. Resun R-1431.
- (7) Valve Box: Precast reinforced concrete. Cast iron lid marked for service. Christy F8 in foot traffic areas; G5 in roadways. Provide with PVC pipe extension down to top of pipe.

b. Instruments:

- (1) Thermometer: 3" dial. Stainless steel case. Back or bottom connected as required. 1/2" NPT. 20F-240F, 2F divisions for hot water. 25F-125F, 2F divisions for chilled water. 2" insertion length. Allowance to be made for insulation thickness. For installations over 7 feet above finish floor, provide digital thermometer with remote reader. Marshalltown, Moeller, Taylor, Tel Tru, Winters.
- (2) Thermometer Well: Brass well. Suitable for thermometer above. Provide 2" extension at insulated pipes.

c. Miscellaneous Specialties:

- (1) Temperature and Pressure Relief Valve: ASME rated fully automatic, reseating combination temperature and pressure relief valve sized in accordance with energy input. Sensing element immersed within upper 6" of tank. Watts.
- (2) Union: 2" and Smaller: AAR malleable iron, bronze to iron ground seat. 300 psi. Unions for copper piping shall be copper or lead free cast bronze. Anvil. Size 2-1/2" and Larger: Grooved pipe, synthetic gasket, malleable iron housing. EPDM gasket, NSF 61 rated. Victaulic Style 77, Gruvlok.
- (3) Dielectric Coupling: Insulating union or flange rated for 250 psig. Wilkins DUXL Series.
- (4) Shock Absorber: Multiple bellows. All stainless-steel construction. Designed and applied in accordance with PDI WH201. Amtrol, Smith, Wade, Zurn.
- (5) Flexible Connection: Corrugated bronze or stainless-steel

core covered with high tensile bronze or stainless-steel tubular braid. 150 psi working pressure. NSF 61 and 372 listed. 2" and smaller shall have screwed connections. 2-1/2" and larger shall have flanged connections. Flexonics, Keflex, Metraflex.

- C. Drain Piping (including Condensate): Same as inside building cold water piping.
- D. Miscellaneous Piping Items:
 - 1. Pipe Support:
 - a. Pipe Hanger: Steel "J" hanger with side bolt for piping 4" and smaller; steel clevis hanger for piping 5" and larger. Load and jam nuts. Size and maximum load per manufacturer's recommendation. Felt liner for copper piping. Hanger and rod shall have galvanized finish. B-Line, Anvil, Unistrut.
 - b. Isolating Shield: Galvanized steel shell and reinforcing ribs. 1/4" non-conducting hair felt pad. Pipe hanger in accordance with paragraph above. Increase hanger size per manufacturer's recommendation. B-Line, Semco, Superstrut.
 - c. Construction Channel: 12-gage, 1-5/8" x 1-5/8" galvanized steel channel. Single or multiple section. Self-locking nuts and fittings. B-Line, Anvil, Unistrut.
 - 2. Flashing: Vent flashing shall be 4 lb/ft² lead, 16" sq. flange, length sufficient to be turned down 2" into vent. Oatey. Flashing for other piping through roof shall be prefabricated galvanized steel roof jacks with 16" sq. flange. Provide clamp-on storm collar and seal water tight with mastic. For cold process built-up roof, material shall be 4 lb/ft² lead instead of galvanized steel. For single-ply roofing, use the roofing manufacturer's recommended flashing material.

2.2 PIPING INSULATION MATERIALS:

- A. General: All piping insulation materials shall have fire and smoke hazard ratings as tested under ASTM E-84 and UL 723 not exceeding a flame spread of 25 and smoke developed of 50.
- B. Pre-Molded Fiberglass: Heavy density sectional pre-molded fiberglass with vapor barrier laminated all service jacket and pressure sealing vapor barrier lap. Thermal conductivity shall not exceed 0.25 Btu-in/hr-ft²-F at a mean temperature of 50F. Perm rating 0.02, ASTM E96. Puncture rating 50 Beach units, ASTM D781. Provide 3" (min.) wide tape of same material as lap for butt joints. For hot water piping to 140°F, thickness shall be 1" for pipe sizes less than 1"; 1-1/2" thickness for pipe sizes 1" and 1-1/2"; 2" thickness for 2" and larger. See Title 24, Part 6 "California Energy Code" for temperatures above 140°F. Knauf, Johns-Manville, Owens-Corning.
- C. Fiberglass Blanket: Unfaced. Thermal conductivity shall not exceed 0.25 Btu-in/hr-ft²-F at a mean temperature of 50F. 1-1/2" thickness. Knauf, Johns-Manville, Owens-Corning.

- D. PVC Jacket (for pipe, fittings and valves): Pre-molded polyvinyl chloride (PVC) jackets, 0.020" thickness. Size to match application. Provide solvent weld adhesive and PVC vapor barrier pressure sealing tape by same manufacturer. Zeston.
- E. Stretchable Glass Fabric: Reinforcing mesh. 10 X 20 continuous filament glass yarns per inch. Johns-Manville.
- F. Vapor Barrier Coating: Childers CP-30, Foster 30-25.
- G. Lagging Adhesive: Childers CP-50A, Foster 30-36.
- H. Aluminum Jacketing: Aluminum pipe and fitting jacketing. 0.016" thickness for straight pipe. 0.024" thickness for fittings. Stucco-embossed finish. Integral moisture barrier. Provide pre-fabricated aluminum strapping and seals by same manufacturer. Childers.
- I. Outdoor Mastic: Childers CP-10, Foster 65-05.
- J. Insulating Tape: Ground virgin cork and synthetic elastomeric. Black, odorless, and non-toxic. K factor 0.43 Btu-in/hr-ft²-°F or less. Non-shrinking. For outdoor use, provide protective finish by same manufacturer. Halstead.
- K. Molded Closed Cell Vinyl (Piping Insulation Under Lavatories and Sinks): Fully molded closed cell vinyl, 1/8" thick, minimum. Thermal conductivity shall not exceed 1.17 BTU-in/hr-ft²-°F at an average temperature of 73°F. Weep hole in cleanout nut enclosure. Hinged cap over valve to allow access for servicing. Out of sight nylon fastening system and internal ribs on drain insulation to provide air gap (Lav-Guard Only). Truebro Lav-guard, McGuire Pro Wrap, Plumberex.

2.3 FIXTURES:

- A. General: Provide rough-in for and install all plumbing fixtures shown on drawings. Except in equipment rooms, all trim, valves and piping not concealed in wall structure, above ceiling or below floors, shall be brass with polished chrome plate finish, unless noted otherwise. All enameled fixtures shall be acid resisting. Standard color is white unless otherwise noted.
- B. Schedule: Refer to Plumbing Fixture Schedule on the drawings for list of fixtures and trim. Manufacturer's model numbers are listed to complete description. Equivalent models of American Standard, Eljer, Elkay, Haws, Just, Kohler, Moen, T&S Brass, Willoughby or Zurn are acceptable. For drainage fixtures, equivalent models of Josam, Mifab, Smith, Wade or Zurn are acceptable.
- C. Stops and P-Traps: All fixtures shall be provided with stops and P-Traps as applicable. Wall mounted faucets, valves, etc. shall have integral stops or wall mounted stops.
 - 1. Stops: All hot and cold water supplies shall be 1/2" I.P.S. inlet angle stops with stuffing box, loose key lock shield, and brass riser (3/8" for 2-1/2 gpm and less, otherwise 1/2"). 1/4 turn ball stops do not require stuffing box. Dahl, McGuire, Speedway.

2. P-Traps: Semi-cast brass, ground joint. 17-gage. Clean-out plug. Unobstructed waterway. California Tubular, McGuire.
- D. Caulking: Caulk fixtures with white G.E. "Sanitary SCS1700", mildew resistant silicone sealant with EPA listed anti-microbial.

2.4 EQUIPMENT:

A. General Requirements:

1. Capacity: Capacities shall be in accordance with schedules shown on drawings. Capacities are to be considered minimum.
2. Dimensions: Equipment must conform to space requirements and limitations as indicated on drawings and as required for operation and maintenance. Equipment will not be accepted that does not readily conform to space conditions. Prepare and submit layout drawings for all proposed equipment (different than scheduled units) showing actual job conditions, required clearances for proper operation, maintenance, etc.
3. Ratings -Electrical: Electrical equipment shall be in accordance with NEMA standards and UL or ETL listed where applicable standards have been established.
4. Piping: Each item or assembly of items shall be furnished completely piped for connection to services. Control valves and devices shall be provided. Equipment requiring domestic water for non-potable use shall be provided with backflow preventer acceptable for intended use by local governing authorities.
5. Electrical:
 - a. General: Each item or assembly of items shall be furnished completely wired to individual terminal blocks for connection to single branch electrical circuit. All electrical accessories and controls required by equipment shall be furnished. Provide terminal blocks for controls and interlocks not included in equipment package. Manual and magnetic starters shall have ambient compensating running overcurrent protection in all ungrounded conductors. Magnetic starters shall be manual reset, and shall have H-O-A switches and auxiliary contacts. Controllers and other devices shall be in NEMA 1 or 3R enclosures as applicable.
 - b. Wiring: Conductors, conduit, and wiring shall be in accordance with Electrical Specifications. Individual items within assembly shall be separately protected with dead front, fused disconnect, fuse block, or circuit breaker for each ungrounded conductor, all accessible on operating side of equipment. Switches, contacts and other devices shall be in ungrounded conductors.
 - c. Motors: Shall be rated, constructed and applied in accordance with NEMA and ANSI Standards without using service factor. Single-phase motor shall be of type to suit application. Motors exposed to weather shall be TEFC. Vertical motors with exposed fans shall have rain caps.
 - d. Starters: Motor starters shall be furnished for all equipment except where starter is in a motor control center as designated on the electrical drawings. Deliver starter to Electrical Contractor for

- installation and wiring.
 - e. Control Voltage: Equipment connected to greater than 240 volts shall be provided with 120 volt control circuit from integral protected transformer if separate source is not indicated on plans. 240 volt control is acceptable if confined within control panel.
 - f. Submittals: Included in shop drawings shall be internal wiring diagrams and manufacturer's recommended external wiring.
- B. Water Heater: Electric. Glass lined tank with magnesium anode protection. 150 psi working pressure. Fully insulated. Automatic temperature control. High limit control. Provide ASME rated temperature and pressure relief valve sized in accordance with energy input, dielectric couplings and drain cock. UL listed. A.O. Smith, American Appliance, Bradford-White, Rheem, Ruud, State Industries.
- C. Circulating Pump: In line centrifugal. 3-speed motor. Body: Lead Free bronze body, brass impeller. Mechanical seals. Bronze sleeve bearings. Integral thermal overload protection. Bell and Gossett/Xylem, Taco. -OR- Body: Aluminum housing. All parts exposed to fluid, stainless steel. Water lubricated ceramic shaft and bearings. Epoxy encapsulated windings. Grundfos.
- D. Electric Drinking Fountain with Bottle Filler: Wall hung. Provide steel mounting brackets. Stainless steel basin. Removable grid drain. Chrome plated brass bubbler with automatic flow regulator and self-closing valve. Non-ferrous evaporator. Lead solder shall not be used. Hermetic compressor with automatic reset overload protection. Air cooled condenser. Adjustable thermostat. UL listed. ARI certified. Elkay, Halsey-Taylor, Haws, Sloan, Sunroc.
- E. Instantaneous Electric Water Heater: See Water Heater Schedule on Plumbing Drawings, Sheet P-001.

PART 3 - EXECUTION

3.1 PIPING INSTALLATION:

- A. General:
- 1. Piping Layout: Piping shall be concealed in walls, above the ceilings, or below grade unless otherwise noted. Exposed piping shall run parallel to room surfaces; location to be approved by Architect. No structural member shall be weakened by cutting, notching, boring or otherwise, unless specifically allowed by structural drawings and/or specifications. Where such cutting is required, reinforcement shall be provided as specified or detailed. All piping shall be installed in a manner to ensure unrestricted flow, eliminate air pockets, prevent any unusual noise, and permit complete drainage of the system. All piping shall be installed to permit expansion and contraction without strain on piping or equipment. Vertical lines shall be installed to allow for building settlement without damage to piping. Pipe sizes indicated on the drawings are nominal sizes unless otherwise noted.
 - 2. Joints:

- a. Threaded: Pipe shall be cut square and reamed to full size. Threads shall be in accordance with ANSI B2.1. Joint compound or tape suitable for conveyed fluid shall be applied to male thread only. Joints shall be made with three threads exposed.
- b. Brazed: Filler rod shall be of suitable or the same alloy as pipe. Brazing filler metal shall have a minimum melting point of 1100F. Brazing shall be performed by a Certified Brazer as certified by an organization/institution that uses standards recognized by the American Welding Society (AWS) and meets the requirements of the ASME Boiler and Pressure Vessels Code, Section 9.
- c. Open Ends: Open ends of piping shall be capped during progress of work to preclude foreign matter.
- d. Electrical Equipment: Piping shall not be run over electrical panels, motor control centers or switchboards.

3. Fittings and Valves:

- a. Standard Fittings: All joints and changes in direction shall be made with standard fittings. Close nipples shall not be used.
- b. Reducers: Pipe size reduction shall be made with bell reducer fittings. Bushings shall not be used.
- c. Unions: A union shall be installed on the leaving side of each valve, at all sides of automatic valves, at equipment connections, and elsewhere as necessary for assembly or disassembly of piping.
- d. Valves: All valves shall be full line size. Provide shut-off valve for each building and each equipment connection. Provide shut-off valve at each point of connection to existing piping. At equipment connections, valves shall be full size of upstream piping, except that gas valves within 18" of the point of connection to the equipment may be the same size as the equipment connection.
- e. Valve Accessibility: All valves shall be located so that they are easily accessible. Valves located above ceilings shall be installed within 24" of the ceiling. For situations where this is not practical or where valves are greater than 10' above the floor, chain wheel operators shall be provided. Chain shall extend down to 7' above the floor. All such installations must have prior review by the Engineer.

4. Pipe Support:

- a. General: Hangers shall be placed to support piping without strain on joints or fittings. Maximum spacing between supports shall be as specified below. Actual spacing requirements will depend on structural system. Side beam clamps shall be provided with retaining straps to secure the clamp to the opposite side of the beam. Vertical piping shall be supported with riser clamp at 20' on center (maximum). Support pipe within 12" of all changes in direction. Support individual pipes with pipe hanger. Copper piping systems which protrude through a surface for connection to a fixture stop or other outlet shall be secured with a drop ell, Nibco 707-3-5, to a Holdrite Model #SB1 bracket; nipple through surface shall be threaded brass.

(1) Pressure Pipe:

Pipe Size (Inches)	Maximum Spacing* Between Supports (ft.)	
	Copper	Sch. 40 steel
1/2	6	6
3/4	6	8
1	6	8
1-1/4	6	10
1-1/2	6	10
2	10	10
2-1/2	10	10
3	10	10
4	10	10
6	10	10

*Based on straight lengths of pipe with couplings only. Provide additional supports for equipment, valves or other fittings. Seismic requirements may reduce maximum spacing.

(2) Gravity Drain Pipe: Piping shall be supported at each length of pipe or fitting, but in no case at greater spacing than indicated above for pressure pipe.

- b. Hot and Cold Water Piping: All hot and cold water piping shall have isolating shield; no portion of this piping shall touch the structure without an isolating shield except at anchor points for fixture rough-in.
- c. Trapeze: Trapeze hangers of construction channel and pipe clamps may be used. Submit design to Engineer for review.

5. Miscellaneous:

- a. Escutcheons: Provide chrome plated metal escutcheons where piping penetrates walls, ceilings, or floors in finished areas.
- b. Pipe Sleeves: All piping passing through concrete shall be provided with pipe sleeves. Allow 1" annular clearance between sleeve and pipe for piping 3" and smaller, otherwise 2" annular clearance. Piping through walls or footings below grade shall be sealed with Link-Seal.
- c. Pipes Passing through Fire Rated Surfaces: Pipes passing through fire rated walls, floors, ceilings, partitions, etc. shall have the annular space surrounding the pipe or pipe insulation sealed with fire rated materials in accordance with the requirements of 2022 CBC Section 714.
- d. Thermometer Gage Tap: Provide tee for instrument well. Minimum size of pipe surrounding well shall be 1-1/2". Mount on side of pipe.
- e. Dielectric Couplings: Dielectric couplings shall be installed wherever piping of dissimilar metals are joined, except that bronze valves may be installed in ferrous piping without dielectric couplings.

B. Sanitary Sewer Piping:

- 1. General: Where inverts are not indicated, sanitary sewer piping shall be

- installed at 1/4" per foot pitch. Piping 4" and larger may be installed at 1/8" per foot pitch where structural or other limitations prevent installation at a greater pitch. Bell and spigot piping shall be installed with barrel on sand bed; excavate hole for bell.
2. Cleanouts: Install cleanouts at ends of lines, at changes of direction greater than 45 degrees, and at not greater than 100 foot intervals. Locate interior cleanouts in accessible locations and bring flush to finished surface.
 3. Vents: Vents shall terminate not less than 6" above the roof nor less than 12" from any vertical surface nor within 10' of any outside air intake. Install horizontal vent lines at 1/4" per foot pitch. Offset vents 2' minimum from gutters, parapets, ridges and roof flashing.
- C. Water Piping: Connections to branches and risers shall be made from top of main. Supply header in fixture battery shall be full size to last fixture, reducing in size only on individual connections to each fixture in battery. Minimum pipe size shall be 1/2", unless otherwise noted. Exposed fixture stops and flush valves shall be installed with brass nipples for copper piping and galvanized nipples for galvanized piping. Nipples are to extend from outside of wall to fitting at header or drop behind finish wall surfaces. Pipe nipples shall be same size as stop or flush valve. Provide shut off for each building and each connection to equipment. Shock absorbers shall be installed in a vertical position as indicated on drawings. Only equipment mounted on vibration isolators shall be connected with flexible connections. Underground hot water and cold water piping which run parallel to each other shall be installed a minimum of 3 feet apart.
- D. Gas Piping: Installation shall comply with CPC and NFPA 54 (National Fuel Gas Code). Shall be pitched to drain to drip legs at low points where other than dry gas conditions exist. No unions shall be installed except at connections to equipment. Provide shutoff and dirt leg (sediment trap) at each equipment connection. Only equipment mounted on vibration isolators shall be connected with flexible connectors.
- Odor Fade Warning – The odorant in propane (LP) and natural gas is colorless and the intensity of its odor can fade under some circumstances. Contact the utility company for more information.**
- E. Drain Piping (Including Condensate): Install with constant pitch to receptacle, 1/4" per foot where possible, otherwise 1/8" per foot minimum. Provide TEE with clean-out plug at all changes of direction. Provide trap at each air handling unit to prevent air leakage. Only equipment mounted on vibration isolators shall be connected with flexible connection. Piping not concealed in wall structure, above ceilings or below floors shall be chrome plated brass, except in equipment rooms, piping shall be galvanized steel. P&T relief and water heater drain piping shall be galvanized steel. Provide secondary drain piping where required.

3.2 PIPING INSULATION INSTALLATION:

- A. Domestic Hot Water:
1. General: All domestic hot water piping, fittings and accessories shall be insulated.
 2. Pipe: Apply pre-molded fiberglass sections to pipe using integral pressure sealing lap adhesive in accordance with manufacturer's recommendations.

Stagger longitudinal joints. Seal butt joints with factory supplied pressure sealing tape.

3. Fittings and Valves:

- a. Wrap all fittings and valves with pre-cut fiberglass blanket to thickness matching adjoining insulation. Cover blanket with PVC jacket in accordance with manufacturer's recommendations. Solvent weld. Seal all joints with factory supplied pressure sealing vapor barrier tape with 1-1/2" (min.) overlap on both sides of joint. Insulate valves to stem. Do not insulate unions, flanges or valves unless water temperature exceeds 140F or the piping is exposed to weather.
- b. For miscellaneous fittings and accessories for which PVC jackets are not available or where proximity of fittings precludes a neat-appearing installation, the Contractor may cover the fiberglass blanket with stretchable glass fabric, one coat of lagging adhesive and a final coat of vapor barrier coating. All exposed ends of insulation shall be adequately sealed.

4. Additional Finish for Exposed Piping and Equipment: All piping and equipment exposed to view but protected from the weather shall be given an additional finish of PVC jackets.

- B. Cold Water Piping-Freeze Protection: All cold water piping exposed to weather or other areas subject to freezing (i.e. ventilated attics, uninsulated exterior soffits, etc.) shall be insulated same as hot water piping. Cover with aluminum jacketing where exposed to weather. Short lengths of pipe and valves may be wrapped with insulating tape, 50% overlap. Cover valves to stem. Apply at least two coats of protective finish where exposed to weather.
- C. Piping Insulation Under Lavatories and Sinks: Exposed water piping, water stops and drain piping under lavatories and sinks shall be insulated with 1/8" thick molded closed cell vinyl. Installation shall be in accordance with manufacturer's instructions.

3.3 FIXTURE INSTALLATION:

- A. Fixture Height: Shall be as indicated on Architectural drawings.
- B. Floor Drains or Floor Sinks: Shall be placed parallel to room surfaces, set level, flush with floor, and adjusted to proper height to drain. Cover openings during construction to keep all foreign matter out of drain line.
- C. Wall Hung Fixtures: Shall be provided with proper backing and hanger plates secured to wall. Fixtures mounted on carriers shall bear against stop nuts, clear of wall surface. Caulk fixtures against walls with white G.E. "Sanitary SCS1700" silicone sealant. Caulking shall be smooth and flush with fixture surface (not concave).
- D. Floor Mounted Fixtures: Shall be provided with proper support plates. Caulk floor mounted fixtures with white G.E. "Sanitary SCS1700" silicone sealant. Caulking shall be smooth and flush with fixture surface (not concave).

- E. Other Connections: Rough-in and connection for trim or fixtures supplied by others shall be included in this specification section.

3.4 EQUIPMENT INSTALLATION:

- A. General: It shall be the responsibility of the equipment installer to insure that no work done under other specification sections shall in any way block, or otherwise hinder the equipment. All equipment shall be securely anchored in place.
- B. Connections to Equipment: Where size changes are required for connections to equipment, they shall be made immediately adjacent to the equipment and, if possible, inside the equipment cabinet.

3.5 TESTS AND ADJUSTMENTS:

- A. General: Unless otherwise directed, tests shall be witnessed by a representative of the Architect. Work to be concealed shall not be enclosed until prescribed tests are made. Should any work be enclosed before such tests, the Contractor shall, at his expense, uncover, test and repair all work to original conditions. Leaks and defects shown by tests shall be repaired and entire work retested. Tests may be made in sections, however, all connections between sections previously tested and new section shall be included in the new test.
- B. Gravity Systems:
 - 1. Sanitary Sewer: All ends of the sanitary sewer system shall be capped and lines filled with water to the top of the highest vent, 10' above grade minimum. This test shall be made before any fixtures are installed. Test shall be maintained until all joints have been inspected, but no less than 2 hours.
 - 2. Drains (Including Condensate): Similar to Sanitary Sewer.
- C. Pressure Systems:
 - 1. General: There shall be no drop in pressure during test except that due to ambient temperature changes. All components of system not rated for test pressure shall be isolated from system before test is made.
 - 2. Domestic Hot and Cold Water Piping: Maintain 100 psig water pressure for 4 hours.
 - 3. Backflow Preventer: All backflow preventers shall be tested according to manufacturer's recommendations and the USC Cross Connection Control and Hydraulic Research Manual (8th Edition). Testing shall be performed by an AWWA Certified Backflow Prevention Assembly Tester. Contractor shall certify in writing to the Architect the date which backflow preventers were tested and by whom test was witnessed.
 - 4. Gas Piping: Maintain 100 psig air pressure for 4 hours.
- D. Fixtures: Provide torque testing of water closet carrier anchor bolts in presence of Inspector. If Inspector is not available, a testing agency shall handle the inspection.

3.6 DISINFECTION:

- A. Disinfect all domestic water piping in accordance with 2022 CPC Section 609.10, and in accordance with administrative authority. Disinfection process shall be performed in cooperation with health department having jurisdiction and witnessed by a representative of the Architect. During procedure signs shall be posted at each water outlet stating, "Chlorination Do Not Drink". After disinfection, one set of water samples shall be collected by Contractor for bacteriological analysis in presence of Inspector. If the water fails the bacteriological test, Contractor shall disinfect the piping again and pay for any retesting required, at no additional cost to owner. Bacteriological testing results shall be obtained by Contractor and delivered to the Owner through the Architect before project completion. Contractor shall include copy of Bacteriological Test Results at closeout with operation and maintenance manuals.

END OF SECTION 22 00 00

SECTION 23 00 00 – GENERAL MECHANICAL PROVISIONS

PART 1 - GENERAL

1.1 GENERAL CONDITIONS

- A. The preceding General Conditions shall form a part of this Section with the same force and effect as though repeated here. The provisions of this Section shall also apply to the following Divisions 22 and 23 of these Specifications and shall be considered a part of those Divisions.

1.2 CODES AND REGULATIONS

- A. All work and materials shall be in accordance with current rules and regulations of applicable codes. Nothing in these Drawings or Specifications is to be construed to permit work not conforming to these codes. Should the Drawings or Specifications call for material or methods of construction of a higher quality or standard than required by these codes, the Drawings and Specifications shall govern. Applicable codes and regulations include, but are not necessarily limited to, the following:

1. California Code of Regulations (CCR):
 - a. Title 8, Industrial Relations
 - b. Title 17, Public Health
 - c. Title 24, Part 1, Administrative Regulations
 - d. Title 24, Part 6, California Energy Code, 2022 Edition
 - e. Title 24, Part 11, California Green Building Code, 2022 Edition
2. California Building Code – CBC - 2022
3. California Mechanical Code - CMC - 2022
4. California Plumbing Code - CPC - 2022
5. California Fire Code - CFC - 2022
6. California Electrical Code - CEC - 2022
7. Air Diffusion Council - ADC
8. American Gas Association - AGA
9. Air Movement and Control Association - AMCA
10. American National Standards Institute - ANSI
11. Air Conditioning and Refrigeration Institute - ARI
12. American Society of Heating, Refrigerating, and Air Conditioning Engineers - ASHRAE
13. American Society of Mechanical Engineers - ASME
14. American Society for Testing and Materials - ASTM
15. American Water Works Association - AWWA
16. Cast Iron Soil Pipe Institute - CISPI
17. National Electrical Manufacturers Association - NEMA
18. National Fire Protection Association - NFPA
19. National Sanitation Foundation - NSF
20. Occupational Safety and Health Act - OSHA
21. Plumbing and Drainage Institute - PDI

- 22. Sheet Metal and Air Conditioning Contractors National Association - SMACNA
- 23. Underwriters' Laboratory - UL
- 24. Local Codes

1.3 DEFINITIONS

- A. Provide: The term "provide" as used in these specifications or on the drawings shall mean furnish and install.
- B. Piping: The term "piping" as used in these specifications or on the drawings shall mean all pipe, fittings, valves, hangers, insulation, etc. as may be required for a complete and functional system.
- C. Ductwork: The terms "duct" or "ductwork" as used in these specifications or on the drawings shall mean all ducts, fittings, joints, dampers, hangers, insulation, etc. as may be required for a complete and functional system.
- D. Wiring: The term "wiring" as used in these specifications or on the drawings shall mean all wiring, conduit, boxes, connections, transformers, relays, switches etc. as may be required for a complete and functional system.

1.4 PERMITS AND FEES

- A. The Contractor shall take out all permits and arrange for all tests in connection with his work as required. All charges are to be included in the work.

1.5 COORDINATION OF WORK

- A. Examination: Before starting work, thoroughly examine existing and newly completed underlying and adjoining work and conditions on which the installation of this work depends. Report to the Engineer in writing all conditions which might adversely affect this work.
- B. Layout: Layout of materials, equipment and systems is generally diagrammatic unless specifically dimensioned. Some work may be shown offset for clarity. The actual locations of all materials, piping, ductwork, fixtures, equipment, supports, etc. shall be carefully planned prior to installation of any work in order to avoid all interference with each other, or with structural, electrical, architectural or other elements.
- C. Verification: If discrepancies are discovered between drawing and specification requirements, the more stringent requirement shall apply. All conflicts shall be called to the attention of the Engineer prior to the installation of any work or the ordering of any equipment. No work shall be prefabricated or installed prior to this coordination. No costs will be allowed to the Contractor for any prefabrication or installation performed prior to this coordination. Verify the proper voltage and phase of all equipment with the electrical plans.
- D. Location of Utilities Prior to Trenching or Earthwork: The Contractor shall notify the Owner a minimum of two business days prior to beginning trenching or earthwork. Prior to this notification, the Contractor shall have marked all

proposed trenches with paint and shall have contacted a utility locating company and have had this company mark all found underground utilities with paint. The Contractor shall then coordinate and arrange for a site visit with the Owner to review the proposed trenching and/or earthwork areas. Trenching and/or earthwork shall not begin until the Owner agrees. Repair and/or compensation for repair of marked utilities is the responsibility of the Contractor. The Owner retains the right to either self-perform the repair or require the Contractor to complete the repair, as directed by the Owner. If while performing the work, the Contractor discovers utilities that have not been marked, the Contractor shall immediately notify the Owner verbally and in writing.

E. Mandatory Coordination and Shop Drawings:

1. Prepare or have prepared high level detailed Shop Drawings in plan view, with cross-sections as necessary, indicating the proposed installation plan for all HVAC, mechanical, fire sprinkler, and plumbing installations for the project. These Drawings should depict actual elevations and linear dimensions, as well as all routing changes, transitions, major offsets, deck and structural attachments deemed necessary to accomplish the installation. Individual Shop Drawings may be prepared for each trade working within the designated space or area; however, the coordination of the consolidated installation shall remain the responsibility of the Contractor. These Shop Drawings shall be provided to each Subcontractor having Work in each area for coordination. Any fittings, offsets or other changes due to coordination shall be at no additional cost to Owner.
2. Whereas the Drawings are diagrammatic, showing only the general arrangement of the systems, Contractor shall have responsibility for the fitting of materials and equipment to other parts of the equipment and structure, and to make adjustments as necessary or required to resolve space problems, preserve service room, and avoid architectural and structural elements and the Work of other trades. Contractor may be required to identify certain areas to relocate installations within the spaces depicted on the Drawings, e.g., ductwork and/or piping may be shifted within the space shown to accommodate other systems. Such functional relocations shall not be deemed a change to the requirements of the Contract. In the event a major re-routing of a system appears necessary, Contractor shall prepare and submit for approval, Shop Drawings of the proposed rearrangement.
3. Because of the diagrammatic nature and small scale of the Drawings, all necessary offsets, adjustments, and transitions required for the complete installation are not shown. Contractor shall carefully investigate the conditions affecting all the Work and shall arrange such Work accordingly, furnishing such fittings, equipment, valves, accessories, offsets, etc., as may be required, regardless of size or cost, to meet such conditions, at no additional cost to the Owner.
4. Coordination changes are not design changes and shall be provided at no additional cost to Owner. Any guidance, drawing or clarification issued by the Architect or Engineer to assist the Contractor or their sub-contractors in their coordination during construction are not design changes and shall be provided at no additional cost to Owner.
5. Resolve differences or disputes between subcontractors and materials suppliers concerning coordination, interference, or extent of work between

sections. The Contractor's decisions, if consistent with the Contract Documents, shall be final. The Architect and their Consultants are not required to coordinate work between sections and will not do so. Any changes required that affect the design intent shall be presented to and approved by the Architect and Engineer of Record.

6. The coordinated Shop Drawings must be signed off by HVAC, Plumbing, Fire Sprinkler, Electrical, Framing, Ceiling Installation, and Data and Low Voltage Subcontractors.
7. The signed off Shop Drawings shall be submitted to the Owner's Representative for review and approval prior to commencement of installation.
8. Provide reviewed Shop Drawings to each Subcontractor having Work in each area.

1.6 GUARANTEE

- A. Guarantee shall be in accordance with the General Conditions. The Contractor shall repair any defects due to faulty materials or workmanship and pay for any resulting damage to other work which appears within the guarantee period. These Specifications may extend the period of the guarantee for certain items. Where such extensions are called for, or where items are normally provided with guarantee periods in excess of that called for in the General Conditions, the certificate of guarantee shall be furnished to the Owner through the Engineer.

1.7 QUIETNESS

- A. Piping, ductwork and equipment shall be arranged and supported so that vibration is a minimum and is not transmitted to the structure.

1.8 DAMAGES BY LEAKS

- A. The Contractor shall be responsible for damages caused by leaks in the temporary or permanent piping systems prior to completion of work and during the period of the guarantee, and for damages caused by disconnected pipes or fittings, and the overflow of equipment prior to completion of the work.

1.9 EXAMINATION OF SITE

- A. The Contractor shall examine the site, compare it with Plans and Specifications, and shall have satisfied himself as to the conditions under which the work is to be performed. No allowance shall subsequently be made in his behalf for any extra expense to which he may be put due to failure or neglect on his part to make such an examination.

1.10 COMPATIBILITY WITH EXISTING SYSTEMS

- A. Any work which is done as an addition, expansion or remodel of an existing system shall be compatible with that system.

1.11 MATERIALS AND EQUIPMENT

- A. Materials and equipment shall be new unless otherwise noted. Materials and

equipment of a given type shall be by the same manufacturer. Materials and equipment shall be free of dents, scratches, marks, shipping tags and all defacing features at time of project acceptance. Materials and equipment shall be covered or otherwise protected during construction as required to maintain the material and equipment in new factory condition until project acceptance. All HVAC equipment and ductwork shall be covered, sealed and protected per CGBSC Section 5.504.3 from delivery on site until final start-up.

1.12 SUBMITTALS

- A. Shop Drawings: Within 30 days of contract award, the Contractor shall submit six copies of shop drawings for all materials, equipment, etc. proposed for use on this project. Material or equipment shall not be ordered or installed until written review is processed by the Engineer.

All shop drawings must comply with the following:

1. Shop drawings are required for all material and equipment items and shall include manufacturer's name and catalog numbers, dimensions, capacities, performance curves, and all other characteristics and accessories as listed in the specifications or on the drawings. Descriptive literature shall be current factory brochures and submittal sheets. Capacities shall be certified by the factory. FAX submittals are not acceptable.
2. All shop drawings shall be submitted at one time in a neat and orderly fashion in a suitable binder with title sheet including Project, Engineer and Contractor, table of contents, and indexed tabs dividing each group of materials or item of equipment. All items shall be identified by the specification paragraph number for which they are proposed. All equipment shall also be identified by the mark number as indicated on drawings.
3. All capacities, characteristics, and accessories called for in the specifications or on the drawings shall be high-lighted, circled or underlined on the shop drawings. Calculations and other detailed data indicating how the item was selected shall be included for items that are not scheduled. Data must be complete enough to permit detailed comparison of every significant characteristic which is specified, scheduled or detailed.
4. Electronic Submittals: Where allowed by Division 01, electronic submittals are acceptable providing the following requirements are met. Electronic submittals which do not comply with these requirements will be rejected.
 - a. Submittal shall be a single file in PDF format, with bookmarks for table of contents and each tab, and sub-bookmarks for each item.
 - b. All text shall be searchable (except text that is part of a graphic).
 - c. Submittal shall include all items noted in 1 through 3 above, except a binder is not required.
 - d. Electronic submittals shall be processed through normal channels. Do not submit directly to the Engineer unless the Engineer is the prime consultant for the project.
 - e. Contractor shall provide Owner and Owner's Representative with hard copies of the final submittal. Coordinate exact number required with Owner through Architect/Engineer.

- B. Substitutions: Manufacturers and model numbers listed in the specifications or on

the drawings represent the standard of quality and features desired. Proposed substitutions shall comply with the Owner's General Requirements. Calculations and other detailed data indicating how the item was selected shall be included. The Contractor shall assume full responsibility that substituted items or procedures will meet the specifications and job requirements and shall be responsible for the cost of redesign and modifications to the work caused by these items. At the Engineer's request, furnish locations where equipment similar to the substituted equipment is installed and operating along with the user's phone numbers and contact person. Satisfactory operation and service history will be considered in the acceptance or rejection of the proposed substitution.

- C. Review: Submittals will be reviewed for general conformance with the design concept, but this review does not guarantee quantity shown, nor does it supersede the responsibility of the Contractor to provide all materials, equipment and installation in accordance with the drawings and specifications. The Contractor shall agree that shop drawing submittals processed by the Engineer are not Change Orders; that the purpose of shop drawing submittals by the Contractor is to demonstrate to the Engineer that the Contractor understands the design concept, that he demonstrates his understanding by indicating which equipment and material he intends to furnish and install and by detailing the fabrication and installation methods he intends to use. The Contractor shall agree that if deviations, discrepancies or conflicts between shop drawings and design drawings and specifications are discovered either prior to or after shop drawing submittals are processed by the Engineer, the design drawings and specifications shall control and shall be followed. If a resubmittal is required, submit a complete copy of the Engineer's review letter requiring such with the resubmittal.

1.13 MANUFACTURER'S RECOMMENDATIONS

- A. All material, equipment, devices, etc., shall be installed in accordance with the recommendations of the manufacturer of the particular item. The Contractor shall be responsible for all installations contrary to the manufacturer's recommendations. The Contractor shall make all necessary changes and revisions to achieve such compliance. Manufacturer's installation instructions shall be delivered to and maintained at the job site through the construction of the project.

1.14 SCHEDULING OF WORK

- A. All work shall be scheduled subject to the review of the Engineer and the Owner. No work shall interfere with the operation of the existing facilities on or adjacent to the site. The Contractor shall have at all times, as conditions permit, a sufficient force of workmen and quantity of materials to install the work contracted for as rapidly as possible consistent with good work, and shall cause no delay to other Contractors engaged upon this project or to the Owner. HVAC equipment and functions, whether existing or new, shall be maintained in operating condition whenever the facility is occupied, unless otherwise approved by the Owner.

1.15 DEMOLITION

- A. Existing equipment, ducts, piping, etc. noted for removal shall be removed and delivered to the Owner at a location to be determined by the Owner. Those items determined by the Owner to be of no value shall become the property of the

Contractor and shall be removed from the job site by the Contractor at the Contractor's expense. Existing piping, ducts, services, etc. requiring capping shall be capped below floors, behind walls, above ceilings or above roof unless otherwise noted. Where items are removed, patch the surfaces to match the existing surfaces.

1.16 HAZARDOUS MATERIAL REMOVAL

- A. All hazardous material removal will be by the Owner. Hazardous material is to be removed before the work is started. If the Contractor discovers hazardous material which has not been removed, the Contractor shall immediately cease work in that area and promptly notify the Owner.

1.17 OPENINGS, CUTTING AND PATCHING

- A. The locations and dimensions for openings through walls, floors, ceilings, foundations, footings, etc. required to accomplish the work under this Specification Division shall be provided under this Division. Except as noted below, the actual openings and the required cutting and patching shall be provided by other Divisions. Coring through existing concrete or masonry walls, floors, ceilings, foundations, footings, etc., and saw cutting of concrete floors or asphaltic concrete required to accomplish the work under this Specification Division shall be provided under this Division. Patching of these surfaces shall be provided by other Divisions. Cutting or coring shall not impair the strength of the structure. Any damage resulting from this work shall be repaired at the Contractor's expense to the satisfaction of the Engineer.

1.18 EXCAVATION AND BACKFILL

- A. General: Barrel of pipe shall have uniform support on sand bed. Sand shall be free from clay or organic material, suitable for the purpose intended and shall be of such size that 90 percent to 100 percent will pass a No. 4 sieve and not more than 5 percent will pass a No. 200 sieve. Unless otherwise noted, minimum earth cover above top of pipe or tubing outside building walls shall be 24", not including base and paving in paved areas.
- B. Excavation: Width of trench at top of pipe shall be minimum of 16", plus the outside diameter of the pipe. Provide all shoring required by site conditions. Where over excavation occurs, provide compacted sand backfill to pipe bottom. Where groundwater is encountered, remove to keep excavation dry, using well points and pumps as required.
- C. Backfill:
 - 1. 6" Below, Around, and to 12" Above Pipe: Material shall be sand. Place carefully around and on top of pipe, taking care not to disturb piping, consolidate with vibrator.
 - 2. One Foot Above Pipe to Grade: Material shall be sandy or silty loam, free of lumps, laid in 6" layers, uniformly mixed to proper moisture and compacted to required density. If backfill is determined to be suitable and required compaction is demonstrated by laboratory test, water compaction in 6" layers may be used, subject to review by Engineer.

- D. Compaction: Compact to density of 95% within building and under walkways, driveways, traffic areas, paved areas, etc. and to 90% elsewhere. Demonstrate proper compaction by testing at top, bottom and one-half of the trench depth. Perform these tests at three locations per 100' of trench.

1.19 CONTINUITY OF SERVICES

- A. Existing services and systems shall be maintained except for short intervals when connections are made. The Contractor shall be responsible for interruptions of services and shall repair damage done to any existing service caused by the work. If utilities not indicated on the drawings are uncovered during excavation, the Contractor shall notify the Engineer immediately.

1.20 PROTECTIVE COATING FOR UNDERGROUND PIPING

- A. All ferrous pipe below grade (except cast iron) shall have a factory applied protective coating of extruded high density polyethylene, 35 to 70 mils total thickness, X-Tru-Coat, Scotchkote. All fittings and areas of damaged coating shall be covered with two layer double wrap of 10 mil polyvinyl tape to total thickness of 40 mils. John-Mansville. Protective coating shall be extended 6" above surrounding grade.

1.21 ACCESS DOORS

- A. Provide access doors as required where equipment, piping, valves, ductwork, etc. are not otherwise accessible. Access doors shall match the wall or ceiling finish and fire rating as indicated on the Architectural drawings. 16-gage steel frame and 14-gage steel door with paintable finish, except in ceramic tile, where door shall be 16-gage stainless steel with satin finish. Continuous hinge. Deliver doors to the General Contractor for installation. Milcor. Unless otherwise noted, the minimum sizes shall be as follows:

1 valve up to 1-1/2"	12" x 12"
1 valve up to 3"	16" x 16"

1.22 HOUSEKEEPING PAD

- A. Housekeeping pads shall be 6" high concrete, 3000 PSI strength, unless otherwise noted. Pad shall extend 6" beyond the largest dimensions of the equipment, unless otherwise noted. The top edge of the pad shall have a 3/4" chamfer. Unless otherwise noted, the pad shall have #4 reinforcing bars at 12" on center, each way, located at mid-depth of the pad. If not poured at the same time as the slab with pad rebar tied to slab rebar, the pad shall be anchored as follows: Drill 5/8" diameter, 3" deep hole in slab. Install 7" long, #4 rebar with Simpson Set epoxy system. Provide a minimum of 4 of these anchors per pad, but no more than 4 feet apart in either direction. Anchor points shall be 12" from the edge of the pad.

1.23 CONCRETE ANCHORS

- A. Steel bolt with expansion anchor requiring a drilled hole - powder driven anchors, adhesive anchors and concrete screws are not acceptable. Re-use of screw

anchor holes shall not be permitted. Minimum concrete embedment shall be 4-1/2 diameters. Minimum spacing shall be 12 diameters center to center and 6 diameters center to edge of concrete. Post-installed anchors in concrete used for component anchorage shall be pre-qualified for seismic application in accordance with ACI 355.2 and ICC-ES AC193. Post-installed anchors in masonry used for component anchorage shall be pre-qualified for seismic applications in accordance with ICC-ES AC01. Maximum allowable loads for tension and shear shall be as determined by Calculation in compliance with ACI 318-19, Chapter 17, and the anchor's ICC or IAPMO evaluation report. Hilti, Powers, Red Head.

1.24 EQUIPMENT ANCHORING AND OTHER SUPPORTS

- A. Mechanical systems (equipment, ductwork, piping, conduit, etc.) shall be anchored in accordance with the CBC. All systems mounted on concrete shall be secured with a concrete anchor at each mounting point. All air handlers shall be mounted on spring isolators. Secure base plate as indicated above. Attachment of equipment, ductwork, piping, conduit, etc. supported on curbs or platforms shall be made to the side of curbs and platforms, where possible. Where screws or lag bolts must be installed through the top of a sheet metal cap, the installation shall be as follows. Pre-drill pilot hole. Fill pilot hole with polyurethane sealant. Install screw or lag bolt with a flat washer and an EPDM washer adjacent to the sheet metal.

1.25 SEISMIC SUPPORT AND RESTRAINT DESIGN SERVICE:

- A. All mechanical systems (equipment, ductwork, piping, etc.) shall be provided with supports and seismic restraints in accordance with the "Seismic Restraint Components for Suspended Utilities", 8th Edition, as published by Mason West Inc., OPM-0043-13, or other HCAI pre-approved system, and in accordance with ASCE 07-16, Chapter 13, as amended by CBC Section 1617A.1. Brace spacing shall be reduced by 50% for cast iron, plastic, no-hub, or other non-ductile piping. A copy of this manual shall be kept on site at all times during construction. It is the Contractor's responsibility to obtain copies of the OPM and furnish the IOR with one copy of each.
- B. Contractor shall obtain the services of a Seismic Design service to provide engineered seismic supports and restraints for the project. Mason Industries, or pre-approved equal. **Note: Use of the "12 inch rule" does not exempt Contractor from this requirement.**
 - 1. All seismic designs, including designs using HCAI pre-approvals, shall be submitted as project specific engineered designs sealed and signed by a licensed California structural engineer. All seismic designs shall include project / application specific seismic design demand calculations. Said seismic design demand calculations shall account for seismic forces in all applicable direction including axial, lateral, vertical tension, vertical compression, etc. Designs shall account for prying, eccentricity, uneven loading, weak axis bending, etc.
 - 2. Seismic restraint layouts for piping, ductwork and electrical raceways shall be furnished on shop drawings or added to the contractor's shop drawings and shall include:
 - a. The number, size and location of seismic braces.

- b. Maximum support loads and seismic loads at the seismic brace locations.
 - c. Reference to specific details or pages from the HCAI pre-approved system (OPM).
 - d. **If use of the “12 inch rule” is intended by Contractor, design service shall verify locations where it is intended to be used is feasible and specifically identify these locations on the shop drawings, along with appropriate hanger details.**
- 3. Installations not addressed by the OPM approval must be designed, detailed and submitted along with the shop drawings.
 - 4. Submit seismic restraint layout drawings and special details for approval of the project structural engineer per the requirements listed in the HCAI pre-approval (OPM).
 - 5. Seismic restraint layout drawings shall bear the stamp and signature of the registered professional structural engineer licensed in the state of California who designed the layout of the braces.

1.26 PAINTING

- A. Paint all black iron supports, hangers, anchors, etc. with two coats of rust resisting primer. Also paint all uninsulated black iron piping exposed to weather with two coats of rust resisting primer.

1.27 ROOF PENETRATIONS AND PATCHING

- A. Whenever any part of the mechanical systems penetrates the roof or exterior wall, the openings shall be flashed and counter-flashed water tight with minimum 22 gauge galvanized sheet metal. Flashing shall extend not less than eight inches from the duct, pipe, or supporting member in all directions unless detailed otherwise. All roof penetrations and patching shall be in accordance with the recommendations of the National Roofing Contractor's Association and the Owner's roofing standards.

1.28 SYSTEM IDENTIFICATION

- A. Above Grade Piping: Provide markers on piping which is either exposed or concealed in accessible spaces. For piping systems, other than drain and vent lines, indicate the fluid conveyed or its abbreviation, either by pre-printed markers or stenciled marking, and include arrows to show direction of flow. Pre-printed markers shall be the type that wrap completely around the pipe, requiring no other means of fastening such as tape, adhesive, etc. Comply with ANSI A13.1 for colors. Locate markers at ends of lines, near major branches and other interruptions including equipment in the line, where lines pass through floors, walls or ceilings or otherwise pass into inaccessible spaces, and at 50' maximum intervals along exposed portions of lines. Marking of short branches and repetitive branches for equipment connections is not required.
- B. Below Grade Piping: Bury a continuous, pre-printed, bright-colored, metallic ribbon marker capable of being located with a metal detector with each underground pipe. Locate directly over buried pipe, 6" to 8" below finished grade.

- C. Equipment: All equipment shall be identified with a plastic laminated, engraved nameplate which bears the unit mark number as indicated on the drawings (e.g. AC-4) and identifies the area or space served by the equipment. Provide 1/2" high lettering - white on black background. Nameplates shall be permanently secured to the exterior of the unit.
- D. Valves: Provide stamped brass valve tags with brass hooks or chains on all valves of each piping system, excluding check valves, valves within equipment, faucets, stops and shut-off valves at fixtures and other repetitive terminal units. Prepare and submit a tagged-valve schedule, listing each valve by tag number, location and piping service.

1.29 CLEANING

- A. Progressively and at completion of the job, the Contractor shall thoroughly clean all of his work, removing all debris, stain and marks resulting from his work. This includes but is not limited to building surfaces, piping, equipment and ductwork, inside and out. Surfaces shall be free of dirt, grease, labels, tags, tape, rust, and all foreign material.
- B. At the end of each work day, the Contractor shall cover all open ends of piping and ductwork with protective plastic.

1.30 OPERATION AND MAINTENANCE INSTRUCTIONS: Comply with all requirements of Section 01 78 23 and as follows.

- A. Electronic: Operation and Maintenance Instructions and Wiring Diagrams for all equipment and parts list for all faucets, trim, valves, etc. shall be submitted to the Engineer. All instructions shall be clearly identified by marking them with the same designation as the equipment item to which they apply (e.g. AC-3). All Wiring Diagrams shall agree with reviewed Shop Drawings and indicate the exact field installation. All instructions shall be submitted at the same time and shall be bound in a suitable binder with tabs dividing each type of equipment (e.g. Pumps, Fans, Motors, etc.). Each binder shall be labeled indicating "Operating and Maintenance Instructions, Project Title, Contractor, Date" and shall have a Table of Contents listing all items included. Electronic O & M's shall comply with the Electronic submittal requirements in this Section.
- B. Verbal: The Contractor shall verbally instruct the Owner's maintenance staff in the operation and maintenance of all equipment and systems. The controls contractor shall present that portion of the instructions that apply to the control system. The Engineer's office shall be notified 48 hours prior to this meeting.
- C. Acknowledgment: The Contractor shall prepare a letter indicating that all operation and maintenance instructions (printed and verbal) have been given to the Owner, to the Owner's satisfaction. This letter shall be acknowledged (signed) by the Owner and submitted to the Engineer.

1.31 RECORD DRAWINGS

- A. The Contractor shall obtain one set of prints for the project, upon which a record of all construction changes shall be made. As the work progresses, the Contractor

shall maintain a record of all deviations in the work from that indicated on the drawings. Final location of all underground work shall be recorded by depth from finished grade and by offset distance from permanent surface structures, i.e. building, curbs, walks. In addition, the water, gas, sewer, under floor duct, etc. within the building shall be recorded by offset distances from building walls. An electronic copy of the original drawings will be made available to the Contractor. The Contractor shall transfer the changes, notations, etc. from the marked-up prints to the electronic copy. The record drawings (marked-up prints, electronic drawings disc and a hard copy) shall be submitted to the Engineer for review.

1.32 ACCEPTANCE TESTING

- A. All acceptance testing as required by California Code of Regulations, Title 24, and as noted on the Certificate of Compliance form, (where applicable), shall be performed and documented by an Acceptance Test Technician (ATT). These documents must be provided to the building inspector during construction and must be completed through an Acceptance Test Technician Certification Provider (ATTCP). The Contractor shall submit a copy of the documentation to the Engineer for review (hardcopy or electronic), prior to submitting to Administrative Authority.

PART 2 - PRODUCTS (not used)

PART 3 - EXECUTION (not used)

END OF SECTION 23 00 00

SECTION 23 00 01 – HEATING, VENTILATING AND AIR CONDITIONING

PART 1 - GENERAL

1.1 GENERAL MECHANICAL PROVISIONS

- A. The General Mechanical Provisions, Section 23 00 00, shall form a part of this Section with the same force and effect as though repeated here.

1.2 SCOPE

- A. Included: Provide all labor, materials and services necessary for complete, lawful and operating systems as shown or noted on the drawings or as specified here. The work includes, but is not necessarily limited to, the following:
 - 1. Air distribution system.
 - 2. All equipment as shown or noted on the drawings or as specified.
 - 3. Refrigeration system.
 - 4. System energy balance.
 - 5. Coordinate with Section 23 09 23 (Direct Digital Control System) regarding location and installation of system sensors, valves, actuators, etc. and to provide simultaneous start-up.
 - 6. Demolition as indicated on drawings. Where demolition is called for, remove all equipment, piping, ductwork, braces, supports, housekeeping pads, temperature controls and related items no longer required.
- B. Work Specified Elsewhere:
 - 1. Line voltage power wiring to equipment, motor starters in motor control centers, disconnect switches and installation of all starters are included in the Electrical Sections, unless otherwise noted.
 - 2. Connection of condensate drains and domestic water to equipment.
 - 3. Access doors.
 - 4. Concrete and reinforcing steel unless specifically called for in the drawings or specifications.
 - 5. Painting unless specifically called for in the drawings or specifications.
 - 6. Carpentry.
 - 7. Direct Digital Control System.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

- A. Refrigerant Piping: Hard drawn Type ACR copper, dried and capped, ASTM B280. Wrought copper fittings, silver alloy brazed, 1100°F, Silfos.
- B. Miscellaneous Piping Items:

1. Pipe Support:
 - a. Pipe Hanger: Steel "J" hanger with side bolt for piping 4" and smaller; steel clevis hanger for piping 5" and larger. Load and jam nuts. Size and maximum load per manufacturer's recommendations. Felt liner for copper piping. Hanger and rod shall have galvanized finish. B-Line, Unistrut.
 - b. Isolating Shield: Galvanized steel shell and reinforcing ribs. 1/4" non-conducting hair felt pad. Pipe hanger in accordance with paragraph above. Increase hanger size per manufacturer's recommendation. B-Line, Semco.
 - c. Construction Channel: 12-gage, 1-5/8" x 1-5/8" galvanized steel channel. Single or multiple section. Self-locking nuts and fittings. B-Line, Unistrut.
2. Flashing: Flashing for piping through roof shall be prefabricated galvanized steel roof jacks with 16" square flange around pipe. Provide clamp-on storm collar and seal water tight with mastic. Maintain dielectric separation between copper and galvanized materials. For cold process built-up roof, material shall be 4 lb/ft² lead instead of galvanized steel.

2.2 PIPING INSULATION MATERIALS

- A. General: All piping insulation materials shall have fire and smoke hazard ratings as tested under ASTM E-84 and UL 723 not exceeding a flame spread of 25 and smoke developed of 50.
- B. PVC Jacket (for pipe, fittings and valves): Pre-molded polyvinyl chloride (PVC) jackets, 0.020" thickness. Size to match application. Provide solvent weld adhesive and PVC vapor barrier pressure sealing tape by same manufacturer. Zeston.
- C. Aluminum Jacketing: Aluminum pipe and fitting jacketing, 0.016" thickness for straight pipe. 0.024" thickness for fittings. Integral moisture barrier. Stucco-Embossed finish. Provide pre-fabricated aluminum strapping and seals by same manufacturer. ITW or RPR.
- D. Metal Jacketing Sealant: Childers CP-76, Foster 95-44.
- E. Flexible Elastomeric: Closed cell flexible elastomeric preformed pipe insulation. Thermal conductivity shall not exceed 0.27 Btu-in/hr-ft²-°F at a mean temperature of 70°F. 1/2" thick. Provide #520 adhesive and Armaflex insulation pipe hangers by same manufacturer. Armacell Armaflex.

2.3 DUCTWORK MATERIALS:

- A. General: All ductwork materials shall have fire and smoke hazard ratings as tested under ASTM E-84 and UL 723 not exceeding a flame spread of 25 and smoke developed of 50. Shall comply with 2022 CMC.

- B. Metal Ductwork: Metal ductwork shall be galvanized sheet steel, lock forming quality, ASTM A-653, with gage and construction to match SMACNA Standard for pressure required (26 gage minimum).
- C. Flexible Ductwork: Insulated flexible ductwork. One pound per cubic foot glass fiber insulation, 1-1/2" thick (R-6), 2" thick (R-8) where ductwork is outside the building thermal insulation envelope. Thermal conductivity shall not exceed 0.25 Btu-in/hr-ft²-°F at a mean temperature of 75°F. Seamless metalized reinforced polyester vapor barrier jacket. Duct shall comply with NFPA 90A. Continuous internal liner bonded to galvanized steel wire helix. Duct shall be capable of continuous operation at 1-1/2" of positive water static pressure and 4,000 ft/min air velocity. JP Lamborn.
- D. Duct Sealants: All Joints Exposed to Weather: Sealant shall be water based, Foster 32-19/32-17, Childers CP-146/148, United Duct Sealer WB or G.E. "SilPruf" SCS2000 silicone sealant. Joints Not Exposed to Weather: Fiber reinforced. White in color. Foster 32-17, Childers CP-148, Design Polymerics DP1030, Hardcast Versa-Grip 181, Hardcast CCWI-181.

2.4 AIR TERMINALS AND DUCT FITTINGS:

- A. Grilles: (Grilles, Registers, Diffusers and Louvers)
 - 1. Information on Drawings: Refer to Grille Schedule on the drawings for the list of grilles. Manufacturer's model numbers are listed to complete the description. Equivalent models of Anemostat or Krueger are acceptable. Refer to the floor plans for neck size, CFM, air diffusion pattern and fire damper, if required.
 - 2. Performance: Submit complete performance data (throw, pressure drop, noise level, etc.) for all grilles proposed, other than those scheduled. Testing shall be in accordance with ANSI/ASHRAE 70-1991. If, according to the certified data of the manufacturer of the proposed units, the sizes indicated on the drawings will not perform satisfactorily, the units shall be reselected by the Contractor for the proper diffusion, spread, pressure drop, throw and noise level.
 - 3. Frame and Accessories: Supply, return, and exhaust grilles shall not have an opposed blade volume control damper unless otherwise noted. All surface mounted grilles shall have a perimeter gasket and flanged edge. All grilles shall have frames suitable for mounting in the surfaces designated by the architectural drawings. Key or screwdriver operated, no slide bars.
 - 4. Finish: All ceiling and wall grilles and all louvers shall have a paintable white finish unless otherwise noted. Interior components (everything behind the face plate) shall be flat black. Floor grilles shall have an anodized aluminum finish unless otherwise noted.
- B. Branch Duct Volume Damper: Volume control damper (VCD) in rectangular ducts shall be as follows: Opposed blade, 6" maximum blade width, 16-gage blade, 48" maximum length, nylon or oil impregnated bronze bearings, 1/2" diameter pin shaft, 16-gage channel frame, actuating rod and linkage out of air stream. VCD in round duct shall be as follows: Damper blade full height of branch and 1" less than branch width. All branch dampers shall have regulator with stamped steel

handle, spring loaded shaft nut, cast body and serrated self-locking die cast core. Regulator for horizontal ducts overhead shall be mounted on sides or bottom of ducts. Secure a 12" length of brightly colored plastic ribbon to handle for ease of location. Where rectangular or round ductwork is insulated, slit insulation to allow handle to protrude. Ventlok 641 (with 607 end bearing for round ducts).

- C. Extractor: Curved blade turns in adjustable position rigid frame. Tuttle and Bailey Deflectrol.
- D. Turning Vanes: Double wall, hollow metal, air foil shape. Spacing in accordance with manufacturer's recommendations. Aero Dyne HEP.
- E. Flexible Connection: UL listed neoprene coated 30 ounce fiberglass cloth. 3" metal, 3" fabric, 3" metal. Ventglas.
- F. Variable Air Volume Terminal:
 - 1. General: Pressure independent, single-duct electric powered variable volume terminal. Scheduled pressure drop is maximum allowable at inlet static at design conditions. Provide integral flow taps and calibration chart on each unit. Performance testing shall be in accordance with ARI Standards. Nailor.
 - 2. Casing: Welded 24-gage galvanized steel. Provide hanger holes on four corners. Interior insulation shall be 1/2" thick, 1-1/2 lb. density glass fiber with high density facing. Insulation shall be UL listed and in compliance with NFPA 90A. Maximum allowable leak rate 2% at 3" WC.
 - 3. Controls: Provide integral cross flow velocity sensor furnished and installed at the factory.
 - 4. Sound Performance Data: Discharge sound and radiated sound levels shall not exceed the published sound levels of the terminals which were used as the basis of design. The manufacturer shall submit discharge sound and radiated sound data in both sound power level (ref: 10-12 watts) in octave bands and noise criteria (NC) ratings. Testing shall be in accordance with ARI Standards.
 - 5. Single Duct Terminal Unit Proportional Electric Heating Coils: Units as scheduled on drawings shall have electric reheat as follows.
 - a. Electric heating coils shall consist of open coils of high-grade nickel and chromium resistance wire or nichrome elements and insulated with ceramic insulators in galvanized steel brackets, supported in heavy gauge galvanized steel frames. Each unit employing an electric heating coil shall be constructed and installed in accordance with the requirements of the local authorities and shall be UL or ETL listed specifically with the heater as a component of the terminal unit device.
 - b. Coils shall have the capacities indicated in Contract Documents. Coils rated up through 15.5 kW shall be single phase, 347-volt, 60 hertz and coils larger than 15.5 kW shall be three phase, four wire, 208, 480 or 600 volt, 60 hertz.
 - c. Terminal bolts, nuts and washers shall be of corrosion resistant materials. Coils shall be constructed so the installation may be accomplished in accordance with the provisions of the National

- Electrical Code, for zero clearance. Coils shall be given a 2000-volt dielectric test at the factory.
- d. Automatic reset thermal cutouts shall be furnished for primary protection with manually resettable limit switches in power circuits for secondary protection. Both devices shall be serviceable through terminal box without removing heating element from the terminal device. The air pressure safety cutout pickup probe shall be remotely mounted near the volume control damper for maximum fidelity.
 - e. Heating coils shall have a terminal box and cover, with proportional heat control for the single circuit, branch circuit fusing on heaters over 45 amps per the NEC and an air flow safety interlock switch for installation in the heater control enclosure. Provide a 120 or 24 VAC control power transformer with an integral or separately mounted primary and/or secondary overcurrent protection device in accordance with NEC requirements
 - f. An electric heater shall be factory mounted and pre-wired as an integral package with single duct variable volume terminal unit. Heaters shall be sized as shown on the drawings. The entire assembly including the electric heater shall be ETL listed for zero clearance and so labeled and shall meet all requirements of the latest National Electrical Code, (CSA C22.2 No.236). The unit shall have a single point electrical and/or pneumatic connection (dual point electrical on 600V). Heater casing and panel shall be a minimum of 20 ga. (1.00) galvanized steel. Each heater shall be complete with automatic reset high limit thermal cut-outs, control voltage transformer as required, ground terminal and high-grade nickel chrome alloy wire.
Element wires shall be supported by ceramic isolators. Each heater shall be supplied with factory supplied and pre-wired branch circuit fusing as required by NEC and UL. Circuiting and fusing shall also be in accordance with the circuiting requirements as shown on the plans.
Additional accessories shall include (control transformer, circuit fusing, disconnect switch, pneumatic electric switches) for heater control.
Heater shall be capable of providing proportional control of heater capacity from an input signal of 4 – 20 mA, 2 – 10 VDC or 0 – 10 VDC. The SCR controller shall provide a 1 – 24 VDC pulsed output to SSR(s) [solid state relay(s)] in proportion to zone heating demand. The SSR's shall switch with zero cross over to reduce system noise and thermal shock on heater coils.
 - g. All wiring of built-in devices shall be brought to clearly marked terminal strips. A complete wiring diagram shall be permanently attached to the heating coil panel cover.
 - h. Electric heating coils shall be designed for operation with the DDC controller and control system.
 - i. Electric heating coils and the associated control panels shall be constructed as a component of the entire terminal unit and mounted in the discharge attenuator downstream of the terminal

- unit. The resulting unit, including the heater and the VAV damper, shall be no longer than 37" (940) in length.
- j. The manufacturer shall prove adequate even airflow over the electric heating coil under the full range of airflow scheduled (minimum to maximum) to prevent uneven heating of the electric coils. The terminal device shall be listed in accordance with UL 1995 as a composite assembly consisting of the VAV terminal device and the electric heating device.
 - k. Shop Drawings shall be submitted for review. Shop Drawings shall indicate specifically the exact construction, materials, internal wiring, NEC working clearances, etc., of the terminal units and electric heating coils to be furnished under these Specifications.

2.5 DUCTWORK INSULATION MATERIALS:

- A. General: All ductwork insulation materials shall have fire and smoke hazard ratings as tested under ASTM E-84 and UL 723 not exceeding a flame spread of 25 and smoke developed of 50.
- B. Fiberglass Blanket: **Installed** thermal resistance at a mean temperature of 75°F shall meet or exceed indicated value. 3/4 lb/ft³ or 1 lb/ft³, **R-6** where ductwork is within the building thermal insulation envelope. 3/4 lb/ft³ **R-8** where ductwork is outside the building thermal insulation envelope and/or above the roof. Faced with glass reinforced foil laminated to Kraft paper. Certainteed, Knauf, Johns-Manville, Owens-Corning.
- C. Acoustic Lining: Glass fiber. **Installed** thermal resistance at a mean temperature of 75°F shall meet or exceed indicated value. One side coated to prevent fiber erosion up to 6000 ft/min. Average noise reduction coefficient of 0.80. 1.5 lb/ft³ density. 1" thick (**R-4.2**) where ductwork is within the building thermal insulation envelope. 2" thick (**R-8**) where ductwork is outside the building thermal insulation envelope and/or above the roof. Certainteed, Knauf, Johns-Manville, Owens-Corning.
- D. Bonding Adhesive: Design Polymerics DP2501, Foster 85-60.

2.6 EQUIPMENT

- A. General Requirements:
 - 1. Start-up: All equipment shall be started and tested in accordance with the manufacturer's written instructions. Start-up procedure shall be performed by a factory trained service technician – not the installing contractor. Provide the inspector of record with factory start-up literature for each mechanical equipment item. Demonstrate to inspector that the start-up procedure has been completed. Start-up sheets shall be completed and submitted with O&M manuals. Start-up sheets shall be submitted, certifying that start-up has been completed per manufacturer's written instructions.
 - 2. Capacity: Capacities shall be in accordance with schedules shown on drawings. Capacities are to be considered minimum.

3. Dimensions: Equipment must conform to space requirements and limitations as indicated on drawings and as required for operation and maintenance. Where Architectural screening is indicated, equipment shall not extend above or beyond screening. Equipment will not be accepted that does not readily conform to space conditions. Prepare and submit layout drawings for all proposed equipment (different than scheduled units) showing actual job conditions, required clearances for proper operation, maintenance, etc.
4. Ratings: Electrical equipment shall be in accordance with NEMA Standards and UL or ETL listed where applicable standards have been established.
5. Piping: Each item or assembly of items shall be furnished completely piped for connection to services. Control valves and devices shall be provided. For equipment mounted on springs, provide flex connections. Equipment requiring domestic water for non-potable use shall be provided with backflow preventer acceptable for intended use by local governing authorities.
6. Electrical:
 - a. General: Each item or assembly of items shall be furnished completely wired to individual terminal blocks for connection to single branch electrical circuit. All electrical accessories required by equipment shall be furnished. Provide terminal blocks for controls and interlocks not included in equipment package. Manual and magnetic starters shall have ambient compensating running overcurrent protection in all ungrounded conductors. Magnetic starters shall be NEMA rated, manual reset, shall have H-O-A switches and auxiliary contacts. Controllers and other devices shall be in NEMA 1 or 3R enclosures as applicable.
 - b. Wiring: Conductors, conduit, and wiring shall be in accordance with Electrical Specifications. Individual items within assembly shall be separately protected with dead front, fused disconnect, fuse block, or circuit breaker for each ungrounded conductor, all accessible on operating side of equipment. Switches, contacts and other devices shall be in ungrounded conductors.
 - c. Motors: Shall be rated, constructed and applied in accordance with NEMA and ANSI Standards without using service factor. Single-phase motor shall be of type to suit application. Three-phase motors shall be NEMA B design on pumps and fans, NEMA C on reciprocating equipment, sealed ball bearing, three-phase induction unless otherwise noted. Motors 1 HP and above shall be NEMA premium efficiency, Class F insulation. Motors in a fan air stream shall be TEFC or TEAO. Vertical motors exposed to weather shall be TEFC and shall have rain caps. Horizontal motors exposed to weather shall be TEFC. Motors for use with VFD's shall be inverter ready.
 - d. Starters: Motor starters shall be furnished for all equipment except where starter is in a motor control center as designated on the electrical drawings. Deliver starter to Electrical Contractor for installation and wiring.
 - e. Control Voltage: Equipment connected to greater than 240 volts shall be provided with 120 volt control circuit from integral

- protected transformer if separate source is not indicated on plans.
240 volt control is acceptable if confined within control panel.
- f. Submittals: Included in shop drawings shall be internal wiring diagrams and manufacturer's recommended external wiring.
7. Fan Selection:
- a. Fan Curves: Performance curves shall be submitted for all units of 3000 CFM or greater. Operating point for forward curved fans shall be from point of maximum efficiency toward increased CFM limited by horsepower scheduled. Operating point for backward inclined fans shall be selected near point of maximum efficiency. Curves shall plot CFM versus static pressure with constant brake horsepower, RPM and efficiency lines.
- b. Static Pressure: Unless otherwise noted, pressure scheduled as external static pressure (ESP) includes all ductwork and accessory losses external to the unit housing. Unless otherwise noted, pressure scheduled as total static pressure includes all ductwork, filter, coil, cabinet, damper and other accessory losses. Unless otherwise noted, pressure scheduled as duct static pressure includes all supply and return ductwork and accessory losses external to the unit housing and plenum (as applicable). The allowance for filter losses is 0.3" WC, unless otherwise noted. Submit itemized static pressure losses for all components.
8. Filters:
- a. General: Tested and rated in accordance with ASHRAE Standard 52.2 and Title 24, C.C.R. Furnish and install one complete change of all filters after air balance is completed and prior to acceptance.
- b. Filter Media: 2" media. MERV-13. Clean filter resistance 0.41" water at 500 fpm. Throw-away frame. Class 2. Camfil AP-Thirteen.
9. Screens: All duct or louver openings to the outside shall be covered with 1/2", 16-gage, galvanized wire mesh screen.
10. Mixing Dampers: Opposed blade, 16 gage. Six inch maximum blade width, 48" maximum length. Nylon or oil impregnated bronze bearings. One half inch diameter pin shaft. 16 gage channel frame. One percent maximum leakage at 4" WC in accordance with AMCA 500 for outside air dampers. Actuating rod out of air stream. Arrow.
11. Sound Ratings: Shall be in accordance with ASHRAE 36 - 72. Sound ratings shall not exceed scheduled values.
12. Drives: Unless noted as direct connected, drives shall be V-belt, rated at 150% of motor horsepower. Multiple drive belts shall be matched set. Drive sheaves shall be dynamically balanced, adjustable, range +/- 10%, selected at mid range. Adjustable relative movement shall be lockable to shaft. Belts shall be aligned within 1-1/2 degrees at all times. Open drives shall be provided with OSHA approved open mesh belt guards. Belt guards exposed to weather shall be weatherproof enclosure with louvered face for adequate ventilation. Driving motor shall be mounted on adjustable rails. T.B. Woods, Browning. Submit RPM range of driven machine with drive selection.

B. Packaged Heat Pump:

1. General: Self-contained heat pump designed for outdoor installation. Factory assembled and tested. Refer to Paragraph 2.6A for general requirements. Provide all starters and relays required for operation. 24-volt control circuit from integral transformer. Weatherproof cabinet, galvanized steel with enamel finish. Indoor air section fully insulated. Outside air inlet. Drain pan. Multivane centrifugal supply fan. ARI certified. Fraser-Johnston.
2. Refrigeration: Sealed hermetic compressor with internal vibration isolating mount. Crankcase heater, high/low pressure switch, recycling timer. Suction line accumulator. Air-cooled condenser with propeller fan. Non-ferrous finned coil. Low ambient control to 35 degrees. 5-year extended warranty on compressor(s).
3. Controls: Compressor and fan motors shall have both thermal and current sensitive overload devices. Automatic defrost control (only if required) every 90 minutes for a period of not more than 10 minutes.
4. Accessories: Electric resistance heater, nichrome elements, over temperature and overcurrent protection. Emergency heat control to allow heater operation if compressor is inoperative.

C. Exhaust Fan:

1. General: All exhaust fans shall be tested according to AMCA Standard 210 in an AMCA registered laboratory. Fans exposed to weather shall have ventilated weatherproof housing over motor and drive assembly. Refer to Paragraph 2.6A for general requirements. All direct drive fans shall be provided with unit mounted speed controllers, unless otherwise noted. All motors 1 horsepower and larger shall be the premium efficiency type.
2. Ceiling Fan: Direct driven, centrifugal exhaust fan. Fan wheel housing and integral outlet duct shall be galvanized steel or injection molded from a specially engineered resin exceeding UL requirements for smoke and heat generation. Outlet duct shall have an aluminum backdraft damper with continuous aluminum hinge rod. Inlet box shall be minimum 22-gauge galvanized steel. Motor shall be isolation mounted to a one piece galvanized stamped steel integral motor mount/inlet. Provide a field wiring compartment with disconnect receptacle. Provide an adjustable prepunched mounting bracket to accommodate different ceiling thickness. Provide a powder painted white aluminum egg-crate grille. Unit shall be designed with provision for field conversion from ceiling to in-line. Wheel shall be centrifugal forward curved type, galvanized steel or injection molded of polypropylene resin. Motor shall be open drip proof type with permanently lubricated sealed bearings and include impedance or thermal overload protection and disconnect plug. Twin City.
3. Roof Fan: Spun aluminum, roof mounted, direct driven, downblast centrifugal exhaust ventilator. Fan shall be of bolted and welded construction utilizing corrosion resistant fasteners and stainless-steel fasteners on cap. Spun aluminum structural components shall be constructed of minimum 16-gauge marine alloy aluminum, bolted to a rigid aluminum support structure. Aluminum base shall have continuously welded curb cap corners for maximum leak protection. Discharge baffle

shall have a rolled bead for added strength. An integral conduit chase shall be provided through the curb cap and into the motor compartment to facilitate wiring connections. Motor shall be enclosed in a weather-tight compartment, separated from the exhaust airstream. Unit shall bear an engraved aluminum nameplate. Wheel shall be centrifugal backward inclined, constructed of 100% aluminum, including a precision machined cast aluminum hub. An aerodynamic aluminum inlet cone shall be provided for maximum performance and efficiency. Motor shall be heavy duty type with permanently lubricated sealed bearings and furnished at the specified voltage, phase and enclosure. Backdraft damper. Twin City.

D. Split System Heat Pump:

1. General: Refer to Paragraph 2.6A for General Requirements. Completely assembled and factory tested. Provide all starters and relays required for operation. All components by same manufacturer. LG.
2. Outdoor Unit:
 - a. Compressor: Sealed hermetic rotary compressor with vibration isolator mountings. Crankcase heater, suction line accumulator, recycling timer. High and low head pressure/temperature protection. Motor overload protection, low ambient feature to 20F cooling mode. High and low side service valves. Recycling timer. Single phase start assist kit. 5-year extended warranty.
 - b. Fan and Coil: Finned tube non-ferrous coil. Propeller type fan, 1200 RPM maximum, direct drive. Totally enclosed motor, overload protected, permanently lubricated, resiliently mounted.
 - c. Cabinet: Weatherproof, factory paint.
3. Indoor Unit:
 - a. Supply Fan: Direct drive, multi-speed forward curve, centrifugal fan, resiliently mounted. Thermally protected motor.
 - b. Indoor Coil: Copper tube, aluminum fin, DX coil.
 - c. Electric Heaters: Integral part of unit, complete with all operational and safety controls, single point wiring terminal, 5-year factory warranty, UL listed as a complete unit.
 - d. Condensate Pan: Install under complete coil area with drain connections.
 - e. Filter: Washable media. Class 2 or better.
4. Controls: Microprocessor control containing temperature selection, room temperature indication, automatic cooling/heating changeover, malfunction alarm, power failure automatic restart safety, and emergency operation function.

PART 3 - EXECUTION

3.1 PIPING INSTALLATION

A. General:

1. Piping Layout: Piping shall be concealed in walls, above the ceilings, or below grade unless otherwise noted. Exposed piping shall run parallel to room surfaces; location to be approved by Engineer. No structural member shall be weakened by cutting, notching, boring or otherwise, unless specifically allowed by structural drawings and/or specifications. Where such cutting is required, reinforcement shall be provided as specified or detailed. All piping shall be installed in a manner to ensure unrestricted flow, eliminate air pockets, prevent any unusual noise, and permit complete drainage of the system. All piping shall be installed to permit expansion and contraction without strain on piping or equipment. Vertical lines shall be installed to allow for building settlement without damage to piping. Lines shall be adequately braced against vertical and lateral movement. For piping connected to equipment mounted on springs, provide flex connections. Pipe sizes indicated on the drawings are nominal sizes unless otherwise noted. Pipe sizes shall not decrease in direction of flow, unless otherwise noted.
2. Joints:
 - a. Threaded: Pipe shall be cut square, and reamed to full size. Threads shall be in accordance with ANSI B2.1. Joint compound or tape suitable for conveyed fluid shall be applied to male thread only. Joints shall be made with three threads exposed.
 - b. Brazed: Welding and brazing shall conform to American Welding Society (AWS) standards. Filler rod shall be of suitable or the same alloy as pipe. Brazing filler metal shall have a minimum melting point of 1100°F. Brazing shall be performed by a Certified Brazer as certified by an organization/institution that uses standards recognized by the AWS and meets the requirements of the ASME Boiler and Pressure Vessels Code, Section 9. The Contractor shall submit welding procedures per AWS for project welds for testing lab review.
 - c. Open Ends: Open ends of piping shall be capped during progress of work to preclude foreign matter.
3. Fittings and Valves:
 - a. Standard Fittings: All joints and changes in direction shall be made with standard fittings. Close nipples shall not be used.
 - b. Reducers: Pipe size reduction shall be made with bell reducer fittings. Bushings shall not be used.
4. Pipe Support:
 - a. General: Hangers shall be placed to support piping without strain on joints or fittings. Maximum spacing between supports shall be as specified below (based on straight lengths of pipe with couplings only). Provide additional supports for equipment, valves or other fittings. Seismic requirements may reduce maximum spacing. Actual spacing requirements will depend on structural system. Refer to drawings for additional requirements and

attachment to structure. Side beam clamps shall be provided with retaining straps to secure the clamp to the opposite side of the beam. Vertical piping shall be supported with riser clamp at 20' on center (maximum). Support pipe within 12" of all changes in direction.

- b. Refrigerant Piping: Support insulated refrigerant line with construction channel and sheet metal support saddle or Cooper B-Line Armafix clamps. 5' spacing. Use isolation shield for uninsulated pipe. When using pre-charged tubing, all changes of direction shall be made with bending tools producing neat uniform bends. Free hand bends will not be accepted.
- c. Trapeze: Trapeze hangers of construction channel and pipe clamps may be used. Submit design to Engineer for review.

5. Miscellaneous:

- a. Escutcheons: Provide chrome plated metal escutcheons where piping penetrates walls, ceilings, or floors in finished areas.
- b. Pipe Sleeves: All piping passing through concrete shall be provided with pipe sleeves. Allow 1" (nominal) clearance between sleeve and pipe or pipe insulation.
- c. Pipes Passing through Fire Rated Surfaces: Pipes passing through fire rated walls, floors, ceilings, partitions, etc. shall have the annular space surrounding the pipe or pipe insulation sealed with fire rated materials in accordance with the requirements of 2022 CBC Section 714.

- B. Refrigerant Piping: Pipe shall be cut square. Joint surfaces shall be thoroughly cleaned, fitted and erected before brazing. After installation, evacuate to 29 inches of mercury, ambient temperature during evacuation shall not be less than 70°F. After evacuation, fill with dry nitrogen to 250 psi and maintain for two hour period without additional charge. After nitrogen test, purge with refrigerant charged through dryer and maintain holding charge in system and equipment. Refrigerant piping below grade shall be run in 4" (min.) PVC conduit with long radius ells. Seal ends of conduit watertight.

3.2 PIPING INSULATION INSTALLATION

- A. Refrigerant Piping: Cover piping with foamed plastic insulation. Longitudinal and end seams shall be thoroughly cemented with adhesive in accordance with manufacturer's recommendations. Cover all fittings, unions, valves and connections. Piping exposed to view shall be covered with PVC jacketing. Piping exposed to weather shall be covered with aluminum jacketing, install all joints and seams to prevent water entry, seal with 1/8" bead of gray metal jacketing sealant.

3.3 DUCTWORK INSTALLATION:

A. General:

- 1. Standards: Unless otherwise noted, all ductwork shall be constructed and installed in accordance with current SMACNA Standards. Ductwork shall

be built to a pressure classification equal to or greater than the maximum operating pressure at that point in the ductwork. A copy of these standards shall be maintained at the job site at all times. Duct work and accessories shall be installed in a manner to prevent vibration and rattling.

2. Access: Provide duct access doors as required to adjust equipment and dampers. Provide wall or ceiling access panels, or remote actuators as required where equipment and dampers are not otherwise accessible. Ventlok 666 concealed remote actuator with zinc finish on cover.
3. Flexible Connections: Connection of ductwork to any vibrating equipment shall be with 3" (min.) flexible connection. Install with ample slack and uniform gap. There shall be no metal to metal contact across flexible connection. Flexible connections exposed to weather shall have a protective sheet metal cover.
4. Flanges and Escutcheon: Where ductwork penetrates walls, ceilings, or floors, furnish and install flange or escutcheon of same material as duct.

B. Low Velocity-Low Pressure (up to 2,000 ft/min and up to 2.0 in water):

1. Sheet Metal Ductwork:
 - a. Ells: Ells with less than standard radius and square ell shall be fitted with turning vanes.
 - b. Tees: Tees in supply ductwork shall be straight tap-in with extractor or 45 degree take-off as shown on drawings. Grilles or branches in supply ductwork shall be a minimum of 8 duct diameters downstream of tees.
 - c. Duct Joints and Seams: All joints and seams which are not exposed to weather shall be sealed airtight with duct sealant. All joints and seams exposed to weather shall be sealed air and water tight with silicone sealant. (See Part 2 of this Specification).
 - d. Dampers: Install volume control damper and damper regulator in all branch ducts.
2. Flexible Glass Fiber Ductwork: The use of flexible duct is limited to the last 5 feet of each branch duct (i.e. one 5 foot section of flexible duct may be used to connect the grille to the sheet metal branch duct). No joints are permitted in this 5' length. Hangers shall be 4" wide metal straps spaced to prevent sagging, 42" spacing maximum. Insert 6" wide fiberglass pad between duct and hanging strap. Joints shall be installed with stainless steel or nylon draw bands, Duro Dyne Dyn-O-Tie. Minimum turn radius of duct centerline not less than 1.5 times the duct diameter. Install without excess length. Ducts shall not be compressed.

3.4 AIR TERMINALS AND DUCT FITTINGS INSTALLATION:

- A. General: Unless otherwise noted, all air terminals and duct fittings shall be installed in accordance with current SMACNA Standards. Terminals and fittings shall be installed in a manner to prevent vibration and rattling. Metal surfaces exposed to view behind grilles and registers shall be painted flat black.

3.5 DUCTWORK INSULATION INSTALLATION:

- A. General: Insulate all sheet metal supply, return and outside air intake ductwork except as noted below. Insulation shall be continuous through walls and floors except at fire dampers.
- B. Where Insulation Is Not Required: Do not insulate factory-insulated ducts or casings, acoustic lined ducts, fibrous glass ducts, underground ductwork, supply or return ductwork exposed to view in the space that it serves, or exhaust ductwork.
- C. Concealed Ductwork: Wrap concealed ductwork including outside air intakes with fiberglass blanket lapped 2" minimum. Secure with staples 4" on centers maximum on straight runs and 3" maximum at elbows and fittings. Insulation on bottom of ducts wider than 36" shall also be secured with mechanical fasteners at 24" on center.
- D. Acoustic Lining: Unless otherwise indicated, all supply and return ductwork in equipment rooms, all ductwork exposed to weather and other ducts as indicated on drawings, shall have acoustic lining. Do not acoustic line outside air intakes. Where acoustic lining is installed, increase each sheet metal dimension to accommodate lining and maintain clear inside duct dimensions shown on drawings. Apply lining with bonding adhesive in accordance with manufacturer's recommendations and also secure with mechanical fasteners in accordance with SMACNA Standards. Seal exposed edges of lining with bonding adhesive.

3.6 EQUIPMENT INSTALLATION

- A. General: The equipment installer shall ensure that no work done under other specification sections will in any way block or hinder the equipment. All equipment shall be securely anchored in place. Provide factory start-up for all equipment in the Central Plant.
- B. Connections to Equipment: Where size changes are required for connections to equipment, they shall be made immediately adjacent to the equipment and, if possible, inside the equipment cabinet.

3.7 TESTS AND ADJUSTMENTS

- A. General: Unless otherwise directed, tests shall be witnessed by a representative of the Engineer. Work to be concealed shall not be enclosed until prescribed tests are made. Should any work be enclosed before such tests, the Contractor shall, at his expense, uncover, test and repair all work to original conditions. Leaks and defects shown by tests shall be repaired and entire work retested.

3.8 SYSTEM ENERGY BALANCE

- A. Scope: Provide the services of an independent test and balance agency to test, adjust and balance, retest and record performance of the system to obtain design quantities as specified. The agency must prove that they have no affiliation with any equipment manufacturer, design engineer, installing contractor, or any other party which might lead to a conflict of interest, in order to provide an unbiased, third party system balance and report.

- B. Qualifications: Prior to commencing work, the agency shall be reviewed by the Engineer and shall be certified by the Associated Air Balance Council or National Environmental Balancing Bureau. The agency shall provide documentation of having successfully completed at least five projects of similar size and scope. The Contractor must have sufficient personnel to respond to a trouble call at the site within two hours.
- C. Instruments: All instruments shall be accurately calibrated; calibration histories shall be available for examination. Application of instrumentation shall be in accordance with AABC or NEBB standards.
- D. Submittals: Include in shop drawings copies of forms to be used for testing and balancing showing all data which is to be recorded. Three copies of completed balance report shall be submitted for review.
- E. Procedure - General: Procedure shall be in accordance with Associated Air Balance Council's "National Standards for Field Measurements and Instrumentation - Total System Balance", Volume Two, No. 12173, or equivalent NEBB standards. System shall be in full, continuous operation during test. Balanced quantities shall be plus 10%, minus 0% of design quantities. All nameplate data, manufacturer, model and serial numbers shall be recorded for each item tested.
- F. Extended Warranty: The test and balance agency shall include an extended warranty of 90 days after completion of test and balance work, during which time the Engineer, at his discretion, may request a recheck or resetting of any item or items in test report. The agency shall provide technicians to assist the Engineer in making any tests he may require during this period of time.
- G. Air Balance Procedure (For Each Air Handling System):
 - 1. All air filters shall be clean when air balance is performed.
 - 2. Provide a sketch of the equipment showing exactly where all pressure readings were taken.
 - 3. Adjust blower RPM to design requirements.
 - 4. Record motor full load amperes.
 - 5. Make pitot tube traverse of main supply and return ducts and obtain design CFM at fans.
 - 6. Record system static pressures, inlet and discharge.
 - 7. Record filter quantity, size(s) and pressure drop across filter(s) at each filter bank.
 - 8. Adjust system for design CFM recirculated air.
 - 9. Adjust system for design CFM outside air.
 - 10. Record entering air temperatures. (DB heating, DB and WB cooling.)
 - 11. Record leaving air temperatures. (DB heating, DB and WB cooling.)
 - 12. Adjust all main supply and return air ducts to design CFM.
 - 13. Adjust all zones to design CFM, supply and return.
 - 14. Adjust all diffusers, grilles and registers to plus 10%, minus 0% of design requirements.

15. Adjust CFM at all exhaust fans, make-up units, etc. (high and low speed, where applicable). Record applicable data from items 1 through 11 above.
16. Each grille, diffuser and register shall be identified as to location.
17. Verify proper diffusion pattern for all ceiling grilles and that all sidewall grilles are set for 5 degrees upward deflection unless otherwise noted. Make a notation of any that are not set properly.
18. Size, type and manufacturer of diffusers, grilles, registers and all tested items shall be identified and listed. Manufacturer's ratings shall be used to make required calculations on all items.
19. Readings and tests of diffusers, grilles, and registers shall include required FPM velocity and test resultant velocity, required CFM and test resultant CFM after adjustments.
20. In cooperation with the control manufacturer's representative, set adjustments of automatically operated dampers to operate as specified. Testing agency shall check all controls for proper calibrations and list all controls requiring adjustment by control installers.
21. All diffusers, grilles and registers shall be adjusted for required air patterns and to minimize drafts.
22. As a part of the work of this contract, THE AIR CONDITIONING CONTRACTOR shall make any changes in pulleys, belts and dampers or the addition of dampers required for correct balance as recommended by air balance agency, at no additional cost to Owner.
23. Set, test and adjust packaged heating/cooling unit economizer operation in cooperation with controls contractor. Record minimum and maximum outside and exhaust airflows.
24. Verify that the controls contractor has commissioned and documented their work before the TAB work begins

END OF SECTION 23 00 01

SECTION 23 09 23 DIRECT DIGITAL CONTROL AND ENERGY MANAGEMENT SYSTEM

PART 1 - GENERAL

1.1 GENERAL MECHANICAL PROVISIONS

- A. The General Mechanical Provisions, Section 23 00 00, shall form a part of this Section with the same force and effect as though repeated here.

1.2 SCOPE

- A. Included: Provide all labor, materials and services necessary for a complete, lawful and operating direct digital control (DDC) system as shown or noted on the drawings or as specified here. The work includes, but is not necessarily limited to, the following:
 - 1. Control panels, control devices, line and low voltage wiring, conduit and related equipment as required for proper operation of all controlled systems.
 - 2. Power wiring required for control devices such as actuators, controllers, sensors and power supplies. Power wiring for these devices shall be fed from circuits dedicated to the DDC system.
 - 3. provide access to hardware and software or onsite technical support required to assist the TAB effort. The hardware and software or the onsite technical support shall be provided at no cost to the TAB Firm.
- B. Work Specified Elsewhere:
 - 1. Line voltage dedicated power circuits for stand-alone building controllers are included in the Electrical Divisions unless otherwise noted.

1.3 CONTRACTOR QUALIFICATIONS

- A. All controls shall be furnished and installed by a Contractor who is licensed, certified or contracted by the controls manufacturer for design, installation, start-up and service of their product. The Contractor must have factory supplied training and support. The Contractor shall have sufficient personnel to respond to a trouble call at the site within four hours. The Contractor's local manager shall have a minimum of five years' experience in the design, installation, start-up and service of similar systems. The Contractor shall submit a list of at least five projects which are similar in size, scope and contract value to this project. This list shall include the Owner's contact person, phone number and controls contract value.
- B. Quality Assurance
 - 1. General
 - i. The Building Management System (BMS) Contractor shall be Authorized Building Controls Specialist contractor that is regularly engaged in the engineering, programming, installation and service of total integrated Building

Management Systems. Bids from wholesalers, distributors or contractors who do not purchase directly from Johnson Controls are not allowed.

- ii. The BMS Contractor shall have a branch facility within a 25-mile radius of the job site supplying complete maintenance and support services on a 24 hour, 7-day-a-week basis. The BMS Contractor shall have at this facility at least eight (8) factory trained, directly employed and full time technical staff, spare parts inventory, and all necessary test and diagnostic equipment.
- iii. As evidence and assurance of the BMS contractor's ability to support the Owner's system with service and parts, the BMS contractor must have been in the BMS business for at least the last ten (10) years and have successfully completed total projects of at least 10 times the value of this contract in each of the preceding five years.
- iv. The BMS architecture shall consist of the products of a manufacturer regularly engaged in the production of Building Management Systems, and shall be the manufacturer's latest standard of design at the time of bid.

2. Workplace Safety and Hazardous Materials

- a. Provide a safety program in compliance with the Contract Documents.
- b. The BMS Contractor shall have a corporately certified comprehensive Safety Certification Manual and a designated Safety Supervisor for the Project.
- c. The BMS Contractor and its employees and subtrades shall comply with federal, state and local safety regulations.
- d. The BMS Contractor shall ensure that all subcontractors and employees have written safety programs in place that covers their scope of work, and that their employees receive the training required by the OSHA rules that have jurisdiction for at least each topic listed in the Safety Certification Manual.
- e. Hazards created by the BMS Contractor or its subcontractors shall be eliminated before any further work proceeds.
- f. Hazards observed but not created by the BMS Contractor or its subcontractors shall be reported to either the General Contractor or the Owner within the same day. The BMS Contractor shall be required to avoid the hazard area until the hazard has been eliminated.
- g. The BMS Contractor shall sign and date a safety certification form prior to any work being performed, stating that the Contractors' company is in full compliance with the Project safety requirements.
- h. The BMS Contractor's safety program shall include written policy and arrangements for the handling, storage and management of all hazardous materials to be used in the work in compliance with the requirements of the AHJ at the Project site.
- i. The BMS Contractor's employees and subcontractor's staff shall have received training as applicable in the use of hazardous materials and shall govern their actions accordingly.

3. Quality Management Program

- a. Designate a competent and experienced employee to provide BMS Project Management. The designated Project Manager shall be empowered to make technical, scheduling and related decisions on behalf of the BMS Contractor. At minimum, the Project Manager shall:

- ◇ Manage the scheduling of the work to ensure that adequate materials,

- labor and other resources are available as needed.
- ◇ Manage the financial aspects of the BMS Contract.
- ◇ Coordinate as necessary with other trades.
- ◇ Be responsible for the work and actions of the BMS workforce on site.

1.4 BASIS OF DESIGN

- A. The system shall be Johnson Metasys Building Systems, without substitution, to match County of Fresno Standard.

1.5 SUBMITTALS AND OPERATION AND MAINTENANCE MANUALS

- A. Submittals shall be in accordance with Sections 01 33 00 and 23 00 00 and shall include the following:
 - 1. Contractor qualifications. Manufacturer licenses, contracts or certifications for the installer shall be submitted on manufacturer's letterhead.
 - 2. Manufacturer's data for all devices.
 - 3. Manufacturer's data for all software.
 - 4. Diagrams showing control schematics. Diagrams shall include all sensors, terminal strips, panels and control devices. Locations of all devices shall be indicated.
 - 5. Sequence of operation.
 - 6. Site plan showing conduit trench and pullbox locations. This plan shall also show the conduit termination points inside the buildings.
- B. Operation and Maintenance Manuals: Furnish Operation and Maintenance Manuals for all components. These manuals shall contain full documentation which shall include, without being limited to, the following:
 - 1. General description and specifications.
 - 2. Installation and initial checkout procedures.
 - 3. Complete trouble-shooting procedures and diagrams.
 - 4. Complete alignment and calibration procedures for all components.
 - 5. Preventative maintenance requirements.
 - 6. Detailed schematics and assembly drawings.

1.6 SYSTEM ARCHITECTURE

- A. The direct digital control system shall employ a multi-level distributed processing architecture. A web based front end controller shall act as the host and shall communicate with both the system operator and the stand-alone controllers. The stand-alone controllers shall be microprocessor based and perform the specified data acquisition and control functions. They shall connect to and supervise multiple application specific controllers (ASC). The stand-alone controllers shall perform stand-alone control functions whether in communications with the web based front end controller or not. All independent control loops shall be processed and controlled by the stand-alone controllers. Each stand-alone controller shall store historical data for all connected points for a minimum of 24 hours. Historical data shall include total run-time for each digital point. For analog data, periodic samples shall be stored at the frequency of once per minute. The physical connection and interface with the actual field points shall be

accomplished through the ASC's. The ASC's shall be located throughout the data environment, communicate with, and be controlled by the stand-alone controllers. The stand-alone controllers shall be accessible by laptop computer with proper software via cable connection. Access to the system shall also be available through connection at selected space sensors.

PART 2 - PRODUCTS

2.1 SENSORS

- A. Space Temperature Sensor: Room sensor with occupant adjustable set point. Occupant adjustable set point shall be limited by software. Wall mounted temperature sensors shall be mounted with bottom of sensor at 48" above finish floor.
- B. Outside Air Temperature Sensor: Provide one outside air sensor per stand-alone building controller. Install on north wall of building.
- C. Duct Sensor: Averaging sensor shall be used at ducts with greater than 9 square feet of cross sectional area. Sensor shall extend across 75% of the duct. Sensor shall be housed in a NEMA 3R enclosure with proper extension at insulated ducts. Provide access door.
- D. Photocell: Wattstopper EM-24 A 2.
- E. Status Sensor: Current sensing status sensor with sensitivity adjustment.
- F. Smoke Detector: Photoelectric type, 115 VAC. The detector shall operate at air velocities from 300 FPM to 4000 FPM. The detector head shall not require additional filters or screens. Mounted in a sheet metal housing with a removable cover. A visual indication of alarm and power shall be provided on detector front. Manual test and reset switch on front of detector. Power supervisory relay. Minimum of two sets of alarm contacts. UL listed. California State Fire Marshal listed. Air Products and Controls, SM-501Series.

2.2 SYSTEM COMPONENTS

- A. Electric Actuators:
 - 1. General: Fully modulating, UL listed. Visual position indicator, manual override, spring return. Factory weatherproof enclosure where exposed to weather. Belimo.
 - 2. Valve Actuators: Provide with factory mounting brackets and linkage to the control valve. Capable of shutting off against a 50 psi differential.
 - 3. Damper Actuators: Actuators shall be direct mounted onto the damper control shaft without linkage. Damper actuators shall be sized to provide a minimum of 5 inch-pounds of torque per square foot of damper face area.
- B. Lighting Contactors: Contactor with metal enclosure. Square D. Provide low voltage relays to complete the lighting control. For low voltage (120 volt) outside

lighting, provide status relay for lighting status. For 277 volt outside lighting, provide current sensor for lighting status.

- C. Web Based Front End Controller with Graphical Interface: Provide color graphics accessible through the Owner's system (with security protocol) which will allow the user to override on/off and temperature set points directly. Real time data shall be continuously updated. The minimum graphic screens shall include the following:
1. Site lay-out locations of all equipment being controlled, control component locations and spaces served. Provide multiple screens – minimum of one screen per building, plus site and others as needed for clarity. By selecting the desired equipment item, a flow diagram shall be displayed for the related equipment (as described below). By selecting a conditioned space, a graphic display of the zone conditions shall be displayed (as described below).
 2. Flow diagrams shall be provided for each HVAC system, such as air-handling system, chilled water system, hot water system, condenser water system, package unit system with all inputs and outputs dynamically displayed.
 3. Each temperature control zone shall have a screen providing set points, temperatures, and related HVAC system status data.
 4. Scheduling screens allowing on/off times shall be set for all the following:
 - a. Pre-determined individual days
 - b. Pre-determined blocks of days (from/to)
 - c. Schedules for "Routine" days
 - d. Schedules for "Special" days
- D. Enclosures: Hinged, lockable front panel. The panel shall be identified with a label as specified. No conduit or other penetration of any kind shall be made on top of the enclosure. If any such entry is made, a plug is not acceptable; replace the enclosure. Hoffman with metal back panel. NEMA 1 for indoor; NEMA 3R for outdoor, NEMA 12 for hazardous locations.
- E. Wiring: Sensor and communication cable shall be shielded cable, wire gage and number of wires as recommended by the system manufacturer. Install per manufacturer's recommendations. No splices will be allowed. Identify both ends at terminal blocks. All wiring that is routed below grade shall have a PVC jacket, CL2-0552. All other wiring shall be plenum-rated, CL3P-0552.
- F. Conduit: Size conduit per the California Electrical Code and then increase by one size, except that the minimum conduit size for low voltage shall be 1" and the minimum conduit size for 120 volt power shall be 3/4". For underground conduit, provide 100% spare capacity by installing a second conduit (empty) along all conduit routes.
- G. Labels: All labels, signs, etc. shall be engraved, laminated plastic, white on black background, 1/8" high lettering, minimum.
- H. Trane-Mitsubishi Controller. Trane-Mitsubishi controller with on-site LCD and internet IP accessibility with Factory BACnet Interface Card.

- I. Trane-Mitsubishi Room Sensor/Controller: Shall be wall mounted "in-room" wired remote controller.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: A dedicated ASC shall be provided for every item of new equipment and for every item of existing equipment. All electrical work shall be in accordance with the California Electrical Code and the Electrical Specification Sections. Wiring shall be concealed in walls, above the ceilings, or below grade unless otherwise noted. Exposed wiring shall run in conduit parallel to room surfaces; location shall be approved by the Engineer. Wiring in walls or in mechanical rooms, janitor rooms, or storage rooms shall be in conduit. Conduit above roofs shall be rigid conduit. Low voltage wiring in accessible attics may be run without conduit. This wiring shall be strapped to structure at 48" on center, and shall not lay on the ceiling. No structural member shall be weakened by cutting, notching, boring or otherwise. Provide power wiring for each device requiring external power. Dedicated circuits shall be provided for devices as required by the manufacturer. Devices or wiring exposed to the weather shall be protected in NEMA 3R enclosures and weatherproof conduit. All conduit shall include a pull wire. Set, test, and adjust the system for proper operation. Provide connection to the Owner's network for web-based access to stand-alone controllers.
- B. Programming: The Contractor shall be responsible for programming the system and shall coordinate the scheduling (on/off times) with the Owner. All point lists and programming blocks shall be provided by the Contractor. For upgrades or additions to existing systems, all existing programming and existing sequences of operation shall be incorporated into the new system and equipment. The project will not be considered complete until all programming and graphics have been completed and all systems are operational from the location of the web based front end controller.
- C. Control Panels/Enclosures:
 1. ASC's, transformers, relays, etc. shall be housed in enclosures. Enclosures shall be installed as shown on plans. Wherever practical, do not locate enclosures above ceilings. Maintain access to enclosures that are located above ceilings (e.g. at VAV boxes).
 2. For all enclosures, provide a disconnect switch and an in-line fuse. All wiring shall be terminated at terminal strips – no wire nuts. Provide a plastic covered wiring diagram in each enclosure. All wiring (field and inside enclosures) shall be labeled at both ends with machine printed markers – black on white tape. At packaged equipment, locate the enclosure on the side of the unit without obstructing access or service clearance.
 3. Separate 120 volt circuits from low voltage circuits horizontally. A physical barrier is not required. Enclose wiring within the enclosure in 2"x2"

Panduit.

3.2 TRAINING

- A. Prior to final acceptance, the Contractor shall provide operational training to the Owner's personnel. The training sessions shall include a complete demonstration of the system. Dates and times of the training sessions shall be coordinated through the Owner not less than one week prior to session. A total of 40 hours of instruction shall be provided - 20 hours initially, and 20 hours to be spread throughout the first year of operation. The Contractor shall maintain a log of training sessions including dates, times and names/titles of those attending. The Contractor shall submit a copy of this log on request.

3.3 TESTING AND ACCEPTANCE

- A. The Contractor shall verify, in the presence of the Owner, the system accuracy and proper function of each controlled device and sensor. The following items shall be successfully demonstrated prior to acceptance by the Owner:
 - 1. All system outputs including controllers, relays, and other control devices shall be addressed and start/stop functions demonstrated.
 - 2. All inputs shall be displayed and all event-initiated functions shall be demonstrated.
 - 3. Demonstrate program integrity and power restore sequence during and after a power failure and restoration.
 - 4. Deliver all record drawings, wiring diagrams, equipment specifications, operation and maintenance manuals and other documentation as required to describe the system.
 - 5. Complete operator training in the use, programming, and operation of the system.

3.4 SERVICE WORK

- A. Service work shall be performed by service personnel in the direct employ of the controls contractor. The service technicians shall be factory trained and certified by the manufacturer to be competent in all aspects of the installed system. The technician shall have a working knowledge of calibration techniques, preventive maintenance, troubleshooting, software diagnostics and microprocessor repair. Precaution shall be taken to minimize disruption of facility operations by service work.

3.5 SEQUENCE OF OPERATION

- A. System Operation Schedule: The systems shall operate at the following schedule (adjustable by Owner) except as noted:
Systems shall operate per specified sequences on Monday through Friday from 7 AM to 6 PM. Systems shall be off on Monday through Friday from 6 PM to 7 AM. Systems shall be off on Saturday and Sunday.
- B. Alarm Condition Display: On any alarm, the Central Workstation shall display the equipment mark number and the specific alarm condition. Upon highlighting the alarming equipment, the program shall have a graphic display function that

displays the plan of the building floor with the location of the alarming equipment indicated.

- C. System Report: The DDC/EMS shall prepare a system report on demand. The report shall include the following items in the report:
1. Date and time of the current report.
 2. Date and time of the previously reviewed report.
 3. List of any alarms that have occurred the since the last report. The list shall include the time of the alarm, unit that had the alarm, and the type of alarm.
 4. List of any still active run time notices. The list shall include the time of the initial notice, unit that had the notice, and the type of notice.
 5. List of any still active filter change notices. The list shall include the time of the initial notice, unit that had the notice, and the type of notice.
 6. List of any off-hours operations that have occurred since the last report. The list shall include the date and time of the off-hours operation, the unit identification number, the physical / service location of the unit, and the duration of the off-hours operation.
- D. Air Conditioner (AC), VAV, IDU/ODU and Exhaust Fans (EF): See Drawings Sheets M-106 and M-107 for control diagrams.
- E. Domestic Hot Water Circulating Pump: Shall start/stop by DDC/EMS. Status sensor shall report pump status to DDC/EMS.

END OF SECTION 23 09 23

SECTION 26 01 00 - GENERAL ELECTRICAL PROVISIONS

PART 1 GENERAL

1.1 RELATED DOCUMENTS:

- A. Contract Requirements: The foregoing GENERAL CONDITIONS, SPECIFIC CONDITIONS, and supplements thereto and all requirements of Division 1 of these Specifications shall form a part of this Section with the same force and effect as though repeated herein. The provisions of this Section shall apply to all of the following Sections of Division 26 of these Specifications. All applicable portions of the work under Division 26 shall conform fully to all provisions of all other Division 26 sections along with other Sections of these Specifications including, but not limited to the following:

GENERAL - STANDARDS, SUBMITTALS, SHOP DRAWINGS, REVIEW, INSPECTION Sections

EXCAVATING, FILLING, GRADING: DIVISION 2 - SITEWORK

CONCRETE: DIVISION 3

MECHANICAL: DIVISION 25 - MECHANICAL

- B. Codes and Regulations: All electrical equipment and material and its installation shall conform to the current requirements of the following authorities.
1. California Code of Regulations, Title 8-Industrial Safety.
 2. California Code of Regulations, Title 19-Public Safety.
 3. California Code of Regulations, Title 24, Part 1, Administrative Regulations.
 4. California Building Code, California Code of Regulations, Title 24-Part 2, 2013 edition.
 5. California Electrical Code, California Code of Regulations, Title 24-Part 3, 2013 edition.
 6. California Mechanical Code, California Code of Regulations, Title 24-Part 4.
 7. California Plumbing Code, California Code of Regulations, Title 24-Part 5.
 8. California Fire Code (based on the National Fire Code - NFPA).
 9. Regulations of the Division of the State Architect of the State of California, Office of Regulation Services.
 10. Pacific Gas and Electric Service Requirements.

NOTE: Where two or more codes conflict, the most restrictive shall apply. Nothing in these Plans and Specifications shall be construed to permit work not conforming to applicable codes.

- C. Test and Standards: The tests, standards, or recommended procedures of the following agencies shall relate to all parts of these Specifications and shall be considered a minimum:
1. American National Standards Institute (ANSI).
 2. Underwriters Laboratories, Inc. (UL).
 3. National Electrical Manufacturers Association (NEMA).
 4. Electrical Testing Laboratories (ETL).
 5. National Fire Protection Association (NFPA)
 6. Insulated Power Cable Engineers Association (IPCEA).
 7. Institute of Electrical and Electronic Engineers (IEEE).

8. Illumination Engineering Society (IES).
9. National Electrical Testing Association, Inc. (NETA)

1.2 SUMMARY OF WORK:

The Electrical Contractor shall provide all materials, tools, equipment, labor and services necessary to furnish and install complete working electrical systems as shown on the Plans and described within these Specifications. The Electrical Contractor shall furnish all power supplies, disconnects, controls, and any other work as called for in the Division 25 specifications and plans as well as all Electrical and Electrical related work as called for in the Division 26 specifications and plans. In addition, all conduit required by Divisions 27 and 28 and the associated drawings. All systems, at project completion and before final acceptance, shall be demonstrated to have a complete and working functional operation. The work includes but is not specifically limited to items indicated below.

A. Demolition and Phasing:

1. De-energize, disconnect and remove electrical feeds to equipment being removed or relocated.
2. Remove or modify electrical installation in areas of remodel and demolition.
3. Make temporary feeds and connections to areas and equipment to allow phased construction and operation.

B. Electrical Distribution:

1. New panelboards and related equipment.
2. Conduits and feeders for electrical power and control.

C. Building and Mechanical Systems:

1. Complete lighting and power systems.
2. Electrical work associated with mechanical equipment.
3. Conduit and support system for installed telephone and computer signal systems by others.

D. Communications Distribution:

1. Conduit and support system for Video Surveillance, Security, Fire Alarm, Public Address, and Clock Systems by others.

E. Permits and fees relating to electrical work.

END OF SECTION 26 01 00

SECTION 26 05 73 - OVERCURRENT PROTECTIVE DEVICE COORDINATION AND ARC FLASH
STUDY

PART 1 GENERAL

1.1 SUMMARY

- A. This Section includes computer-based, fault-current and overcurrent protective device coordination studies. Protective devices shall be set based on results of the protective device coordination study.

1. Coordination of series-rated devices is permitted where indicated on Drawings.

1.2 REFERENCES

- A. The publications listed below form a part of this Specification to the extent referenced. The publications listed below are referenced as the latest edition published as of the date of this document. The publications are referred to within the text by the basic designation only.

B. Institute of Electrical and Electronics Engineers (IEEE)

1. IEEE 1015, Recommended Practice for Applying Low-Voltage Circuit Breakers Used in Industrial and Commercial Power Systems.
2. IEEE 242, Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems.
3. IEEE 399, Recommended Practice for Power System Analysis.
4. IEEE 620, Guide for the Presentation of Thermal Limit Curves for Squirrel Cage Induction Machines.
5. IEEE C37.13, Standard for Low-Voltage AC Power Circuit Breakers Used in Enclosures.
6. IEEE C37.46, Standard for High Voltage Expulsion and Current-Limiting Type Power Class Fuses and Fuse Disconnecting Switches.
7. IEEE C37.50, Standard for Switchgear--Low-Voltage AC Power Circuit Breakers Used in Enclosures--Test Procedures.
8. IEEE C57.12.00, Standard General Requirements for Liquid-Immersed Distribution, Power, and Regulating Transformers.
9. IEEE C57.96, Guide for Loading Dry-Type Distribution and Power Transformers.

C. Insulated Cable Engineers Association (ICEA)

1. ICEA P-32-382, Short-Circuit Characteristics of Insulated Cable.
2. ICEA P-45-482, Short-Circuit Performance of Metallic Shielding and Sheaths.

D. International Electrical Testing Agency (NETA)

1. NETA ATS, Acceptance Testing Specifications for Electric Power Distribution Equipment and Systems.

E. National Electrical Manufacturers Association (NEMA)

1. NEMA MG 1, Motors and Generators.

F. National Fire Protection Association (NFPA)

1. NFPA 70, National Electrical Code.

1.3 SUBMITTALS

- A. Drawings: Power single line diagram with available short circuit currents indicated for each distribution system component.
- B. Product Data: For computer software program to be used for studies.
- C. Product Certificates: For coordination-study and fault-current-study computer software programs, certifying compliance with IEEE 399.
- D. Qualification Data: For coordination-study specialist.
- E. Other Action Submittals:
 - 1. Coordination-study input data, including completed computer program input data sheets.
 - 2. Study and Equipment Evaluation Reports.
 - 3. Coordination-Study Report.
 - 4. Setting Report.
 - 5. Arc Flash Report and Labels

1.4 QUALITY ASSURANCE

- A. Studies shall use computer programs that are distributed nationally and are in wide use. Software algorithms shall comply with requirements of standards and guides specified in this Section. Manual calculations are not acceptable. Comply with IEEE 399 for general study procedures. Comply with IEEE 242 for short-circuit and coordination time intervals. Short-circuit and coordination study shall comply with FAA Order 6950.2 and FAA Order 6950.27.
- B. Coordination-Study Specialist Qualifications: Furnish services of electrical distribution equipment manufacturer or licensed Professional Engineer, by the state of California, to make a complete system short circuit and protective device electrical coordination study on 12,470 volt primary voltage system, and 480 and 208 volt secondary system. The entity shall be experienced in the application of computer software used for studies, having performed successful studies of similar magnitude on electrical distribution systems using similar devices.
- C. Testing Agency Qualifications: Member Company of the International Electrical Testing Association.
- D. Testing Agency's Field Supervisor: Person currently certified by the International Electrical Testing Association to supervise testing specified in Part 3.

PART 2 PRODUCTS

2.1 COMPUTER SOFTWARE DEVELOPERS

- A. Subject to compliance with requirements, provide computer software programs developed by SKM System Analysis, Incorporated.

2.2 COMPUTER SOFTWARE PROGRAM REQUIREMENTS

- A. Comply with IEEE 399.
- B. Analytical features of fault-current-study computer software program shall include "mandatory," "very desirable," and "desirable" features as listed in IEEE 399.

- C. Computer software program shall be capable of plotting and diagramming time-current-characteristic curves as part of its output. Computer software program shall report device settings and ratings of all overcurrent protective devices and shall demonstrate selective coordination by computer-generated, time-current coordination plots.

1. Optional Features:

- a. Arcing faults.
- b. Simultaneous faults.
- c. Explicit negative sequence.
- d. Mutual coupling in zero sequence.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Examine Project overcurrent protective device submittals for compliance with electrical distribution system coordination requirements and other conditions affecting performance.
1. Submission and approval of electrical short circuit and coordination studies are required prior to submittal of Shop Drawings of electrical distribution equipment. Submittal of electrical distribution equipment made prior to approval of Electrical Studies will be returned without approval.
 2. The arc flash study can be completed after relevant equipment submittals have been assembled.

3.2 SHORT CIRCUIT CURRENT STUDY

- A. Source impedance: As an infinite bus on primary side of utility transformer. Study electrical distribution system from normal power sources throughout electrical distribution system for project and use approved computer software program to calculate values. Include studies of system-switching configurations and alternate operations that could result in maximum fault conditions. Calculate momentary and interrupting duties on the basis of maximum available fault current. Use utility data where available. Calculations to verify interrupting ratings and overcurrent protection devices shall comply with the following:
1. Low-Voltage Circuit Breakers: IEEE 1015 and IEEE C37.50.
 2. Low-Voltage Fuses: IEEE C37.46.
 3. Circuit Breakers: IEEE C37.13.
- B. Study Report:
1. Tabulation of input data including all short circuit sources and system impedances and electrical short circuit currents at each bus in system with contributions from connected busses. Comparison of interrupting and withstand ratings of electrical devices including circuit breakers, fuses, disconnect switches, transfer switches, starters and bus ducts, versus available fault current shall be included. Allowance shall be made for 20 percent growth in short circuit source contributions, for example, utility and motors.
 2. Provide symmetrical three-phase bolted fault currents at 1 cycle (momentary), 5 cycles (interrupting) and steady-state (synchronous) for medium-voltage systems.
 3. Provide symmetrical three-phase bolted fault currents at 1 cycle (momentary) for low-voltage systems.
 4. Provide symmetrical line-to-ground bolted fault currents at 1 cycle (momentary) for solidly grounded multiple generator systems.
 5. Calculations shall be completed in accordance with applicable ANSI and IEEE standards.

6. Calculations shall be completed for the worst case (maximum short circuit current) configuration of the electrical system. Wherever closed transition transfer is incorporated in the design, the contributions from both paralleled sources shall be included in the fault calculations. Tie circuit breakers shall be configured for the maximum utility and motor fault contribution.

C. Equipment Evaluation Report:

1. Prepare a report on the adequacy of overcurrent protective devices and conductors by comparing fault-current ratings of these devices with calculated fault-current momentary and interrupting duties.

3.3 COORDINATION STUDY

A. Gather and tabulate the following input data to support coordination study:

1. Product data for overcurrent protective devices specified in other Division 26 Sections and involved in overcurrent protective device coordination studies. Use equipment designation tags that are consistent with electrical distribution system diagrams, overcurrent protective device submittals, input and output data, and recommended device settings.
2. Impedance of utility service entrance.
3. Electrical distribution system diagram showing the load current that is the basis for sizing continuous ratings of circuits for cables and equipment.
4. Circuit breaker and fuse-current ratings and types.
5. Relays and associated power and current transformer ratings and ratios.
6. Transformer kilovolt amperes, primary and secondary voltages, connection type, impedance, and X/R ratios.
7. Generator kilovolt amperes, size, voltage, and source impedance.
8. Cables. Indicate conduit material, sizes of conductors, conductor insulation, and length.
9. Busway ampacity and impedance.
10. Motor horsepower and code letter designation according to NEMA MG 1.
11. Data sheets to supplement electrical distribution system diagram, cross-referenced with tag numbers on diagram:
 - a. Special load considerations, including starting inrush currents and frequent starting and stopping.
 - b. Magnetic inrush current overload capabilities of transformers.
 - c. Motor full-load current, locked rotor current, service factor, starting time, type of start, and thermal-damage curve.
 - d. Ratings, types, and settings of utility company's overcurrent protective devices.
 - e. Special overcurrent protective device settings or types stipulated by utility company.
 - f. Time-current-characteristic curves of devices indicated to be coordinated.
 - g. Manufacturer, frame size, interrupting rating in amperes rms symmetrical, ampere or current sensor rating, long-time adjustment range, short-time adjustment range, and instantaneous adjustment range for circuit breakers.
 - h. Manufacturer and type, ampere-tap adjustment range, time-delay adjustment range, instantaneous attachment adjustment range, and current transformer ratio for overcurrent relays.
 - i. Panelboards, switchboards, motor-control center ampacity, and interrupting rating in amperes rms symmetrical.

Perform coordination study and prepare a written report using the results of fault-current study and approved computer software program. Comply with IEEE 399. Comply with

NFPA 70 for overcurrent protection of circuit elements and devices. Comply with IEEE 242 recommendations for fault currents and time intervals

B. Transformer Primary Overcurrent Protective Devices:

1. Device shall not operate in response to the following:

- a. Self-cooled, full-load current or forced-air-cooled, full-load current, whichever is specified for that transformer.
- b. Permissible transformer overloads according to IEEE C57.96 if required by unusual loading or emergency conditions.
- c. Device shall protect transformer according to IEEE C57.12.00, for fault currents.

C. Conductor Protection:

1. Protect cables against damage from fault currents according to ICEA P-32-382, ICEA P-45-482, and conductor melting curves in IEEE 242. Verify adequacy of phase conductors at maximum 3-phase bolted fault currents, equipment grounding conductors, and grounding electrode conductors at maximum ground-fault currents.

D. Coordination-Study Report:

1. Prepare a written report indicating the following results of coordination study:

- a. Tabular format of settings selected for overcurrent protective devices:
 1. Device tag.
 2. Relay-current transformer ratios; and tap, time-dial, and instantaneous-pickup values.
 3. Circuit breaker sensor rating; and long-time, short-time, and instantaneous settings.
 4. Fuse-current rating and type.
 5. Ground-fault relay-pickup and time-delay settings.
- b. Prepare coordination curves to determine settings of overcurrent protective devices to achieve selective coordination. Graphically illustrate that adequate time separation exists between series devices, including power utility company's upstream devices. No more than 3 overcurrent protective devices shall be shown on a graph. All text descriptions indicated on the graphs shall be legible. Show the following specific information:
 1. Device tag.
 2. Voltage and current ratio for curves.
 3. Three-phase and single-phase damage points for each transformer.
 4. No damage, melting, and clearing curves for fuses.
 5. Cable damage curves.
 6. Transformer inrush points.
 7. Maximum fault-current cutoff point.
 8. Calculated short circuit current at each bus as seen by the respective protective devices.
 9. Selective coordination in the long time, short time and instantaneous regions of the phase and ground fault protection schemes.
- c. Completed data sheets for setting overcurrent protective devices.

3.4 ARC FLASH STUDY

- A. Perform arc-flash calculations to determine the information necessary to comply with the indicated labeling requirements in Paragraph, Arc Flash and Shock Warning Signs.

1. The study shall be based on NFPA 70E, including the guidance provided within the Annexes. Model the electrical system under normal operating conditions and with motors operating, during which normal maintenance would be undertaken. Arc flash calculations may require different short circuit system modeling than those required for the maximum available short circuit current study used to establish equipment short circuit ratings.
2. Calculations shall be performed using the IEEE 1584 equations. Calculate the arc flash hazard using both three phase bolted fault levels and arcing fault current levels. The highest incident energy level calculated shall be utilized to determine the maximum hazard/risk category.
3. Where equipment arc flash hazard ratings exceed Category 4 (40 cal./sq cm), the coordination study settings shall be reviewed and adjusted to reduce the arc flash hazard while still maintaining coordination. Provide recommended settings or other recommended methods in order to reduce the arc flash hazard to Category 4 or less.
4. Provide all new electrical distribution equipment (such as switchboards, panelboards, transformers, disconnects, etc.) with arc flash equipment labels per NEC 110.16 and NFPA 70E 130.3(C) and 130.7(E)(1). Prepare and apply approved sunlight and ultra-violet resistant weatherproof tags to all equipment as applicable with all approach, minimum distance, clothing, class to be used, eye/face protection to be used and tag identification corresponding to identification number on study. All arc flash labels shall include:
 - a. The header of the label shall be the capitalized word "WARNING" in black on an orange background. The word is to be preceded by the standard alerting symbol of an exclamation point in a black triangle and followed by a black lightning bolt in a black triangle.
 - b. Listing of the hazard: "ARC FLASH" and "SHOCK HAZARD"
 - c. Flash protection: Incident Energy (Cal/cm²) at 18", flash protection boundary, and hazard/risk category number
 - d. Shock protection: voltage, and limited/restricted/prohibited approach boundaries
 - e. Equipment ID
 - f. Where equipment is fed from
 - g. Arc flash hazard calculation date
 - h. Equipment install date

3.5 OVERCURRENT PROTECTIVE DEVICE SETTING

A. Manufacturer's Field Service:

1. Engage a factory-authorized service representative of electrical distribution equipment being set and adjusted, to set overcurrent protective devices within equipment.

B. Testing:

1. Contractor will engage a qualified testing agency to perform device setting and to prepare test reports. After installing overcurrent protective devices and during energizing process of electrical distribution system perform the following device setting tests and prepare reports:
 - a. Verify that overcurrent protective devices meet parameters used in studies.
 - b. Adjust devices to values listed in study results.
 - c. Adjust devices according to recommendations in NETA ATS Inspection and Test Procedures.

END OF SECTION 26 05 73

SECTION 26 10 00 - BASIC ELECTRICAL REQUIREMENTS

PART 1 GENERAL

1.1 DESCRIPTION AND INSTALLATION OF SYSTEMS:

- A. The electrical drawings are diagrammatic and do not necessarily show all raceways, wiring, number or types of fittings, offsets, bends or exact locations of items required by the electrical systems. Items not shown or indicated, which are clearly necessary for proper operation or installation of systems shown, shall be provided at no increase in contract price.
- B. The exact routing of systems and location of devices and equipment shall be governed by coordination with other trades, and structural and architectural conditions. The Architect or Electrical Engineer reserves the right, at no increase in contract price, to make reasonable changes in location of electrical equipment or wiring system so as to coordinate with other systems, to group them into orderly relationships, or to increase their utility. Electrical Contractor shall verify requirements in this regard prior to roughing in.
- C. Install electrical work in cooperation with other trades, make proper provisions to avoid interferences, and coordinate with structural and architectural feature in a manner approved by the Architect or Electrical Engineer. All changes caused by neglect to make such provisions shall be at Electrical Contractor's expense. Provide offsets and special fittings, as required to facilitate installation of the work.
- D. When a particular product or type of product is specified with a manufacturer's designation, the latest published specifications, installation, and construction information of the manufacturer shall constitute the minimum acceptable standard. Any substitutions shall be made in accordance with Paragraph 1.6 SUBSTITUTIONS.

1.2 EXAMINATION OF DOCUMENTS AND SITE:

- A. Before submitting a proposal each bidder shall carefully examine the electrical, mechanical, architectural, and structural drawings and specifications. He shall also visit the sites and fully inform himself as to all existing conditions and limitations applying to the work. If, after such examination and study, it appears that any change from the drawings and specifications should be allowed, the bidder shall so state in writing together with any change in cost involved.
- B. By the act of submitting a proposal, each bidder shall be deemed to have made such examinations of the drawings and specifications and premises, and it will be assumed that he is therefore familiar with the entire scope of the project and has based his proposal upon the work described in the plans and specifications and upon all existing conditions and limitations applying to his work.

1.3 EXECUTION:

- A. Workmanship: The work shall be performed by competent licensed electrician, skilled in the particular phase of the work entailed. The work shall be first class throughout, neat, accurate and in full accordance with the intent of these specifications, and to the satisfaction of the Architect or Electrical Engineer.
- B. Safety: All standard safety procedures as set forth by OSHA, CCR, and California Division of Industrial Safety shall be strictly adhered to.

- C. Coordination: The Electrical Contractor shall familiarize himself with the work of other crafts so as to be able to provide electrical service of correct size, voltage, and other requirements to any equipment to be installed. The installations shall coordinate as to location and time, and interference causing delays and non-acceptable construction shall be avoided.
1. Prior to commencing construction the Electrical Contractor shall arrange a conference with the Mechanical and Plumbing Contractors and sub-contractors as well as equipment suppliers, and shall verify types, sizes, locations, requirements, controls, and diagrams of all equipment furnished by them. Prior to roughing in, he shall inform the Architect and Electrical Engineer, in writing, that all phases of coordination of this equipment have been covered.
 2. Exact equipment rough-in locations shall be verified from shop drawings.
- D. Cutting and Repairing: The Electrical Contractor shall do all cutting necessary for the proper installation of his work, repair any damage done by himself or his workmen, and coordinate his work with that of others. No cutting or patching shall be done without approval of the Architect or Electrical Engineer. Round holes through concrete slabs or walls shall be core drilled with a diamond drill, rectangular openings shall be cut with a diamond saw. In no case shall any concrete beam or column be cut.
- E. Sleeves and Openings: The Electrical Contractor shall be responsible for all sleeves and openings through walls and floors required by electrical work. All openings around conduits in sleeves shall be sealed with a material of equal fire rating as the surface penetrated. Openings not utilized shall be temporarily sealed in a similar manner. All required sleeves shall be furnished to and coordinated with the General Contractor.
- F. Access to Equipment:
1. Access Doors: All concealed equipment, controls, etc., shall be provided with access doors as called for in the Specifications which shall be furnished by the Electrical Contractor of this section for work of this section. Installation shall be the responsibility of the trades in whose surfaces they will be installed. Access doors are not required in removable ceilings.
 2. Equipment shall be installed in readily accessible locations, or means of access provided. Equipment will be deemed to be accessible only if all normal maintenance and operation can be performed with ease by an average sized person.
- G. Cleaning and Painting: All exposed work shall be thoroughly cleaned upon completion of work. Panelboard enclosures, fixtures and equipment, where finish has been marred in shipment or installation, shall be completely refinished. Minor finish damage shall be rectified as indicated by the Architect or Electrical Engineer. Electrical Contractor shall remove from the site all waste and rubbish resulting from his work.
- H. Permits and Fees: For work of this Specification Division, Electrical Contractor shall secure necessary permits and licenses, pay fees and deposits, and arrange for inspection, as required by applicable governmental rules, regulations, codes, and ordinances.

1.4 QUALITY CONTROL:

- A. Supervision: The Electrical Contractor shall personally, or through a competent representative, constantly supervise the work from beginning to completion and final acceptance. He shall cooperate fully with the inspection authorities in the provision of information and access to the work. He shall, to the best of his ability, maintain the same job foreman throughout the life of the project unless a replacement is requested or authorized by the Architect or Electrical Engineer.

- B. Inspection and Tests: The Electrical Contractor shall furnish all labor and test equipment required to fully test and adjust the equipment installed under this specification and demonstrate its proper operation, in accordance with the General Conditions, and the following:
1. Arrange for all tests and inspections and provide minimum one (1) week prior notice to the Architect or Electrical Engineer.
 2. A test must demonstrate that each piece of equipment, outlet, fixture, device, and appurtenance is in sound operating condition and in proper cooperative relation to associated equipment.
 3. All tests shall be conducted under supervision of the Owner or his designated representative, and any defects of any nature which are apparent as a result of such test shall be made correct to the satisfaction of the Architect or Electrical Engineer before final acceptance is made.
 4. No equipment shall be tested, or operated for any other purpose, such as checking motor rotation, until it has been fully checked in accordance with the manufacturer's instructions.
 5. Check and tighten nuts, bolts, lugs, and similar elements of equipment; switchboards, motor control centers, busways, panels, etc. Final torquing shall be done in the presence of the Owner's inspecting representative.
 6. Submit complete test reports with maintenance manual submission.
- C. Work Correction: Any portion of the work that does not perform satisfactorily or any defects that are disclosed by testing shall be corrected by Electrical Contractor at his expense before work will be accepted.

1.5 GROUNDING:

- A. The conduit system supports, cabinets, switchboards, etc., and neutral conductors must be permanently and effectively grounded by means of approved ground clamp, in accordance with the electrical safety orders of the Department of Industrial Relations of the State of California.
- B. The Electrical Contractor shall exercise every precaution to obtain good contacts at all panel boxes, pull boxes, etc. Where it is not possible to obtain good contacts, the conduit shall be bonded around the boxes with a #6 B&S gauge, rubber covered, double braided wire with ground clamps.
- C. Equipment and raceway bonding procedures shall be rigidly maintained and meet all jurisdictional requirements of codes and regulations.

1.6 SUBSTITUTIONS:

- A. Those products, or types of products, listed and specified are intended to set the standard for quality, design, and installation procedure required for the project. The Electrical Contractor shall not substitute other materials, products or systems without the written approval of the Architect or Electrical Engineer. **All substitution requests must be submitted prior to bid.**

1. Electrical Contractor's Options:

- a. Product specified only by reference standards: Select any product meeting standards.
- b. Product specified by naming several products and/or manufacturers: Select any product and/or manufacturer named.
- c. Product specified by naming several products and/or manufacturers and reference standards: Select any product meeting standards. Product and/or manufacturer names indicate products and/or manufacturers that meet standards.
- d. Product specified by naming only product: Select product specified.

- e. Product specified by naming one of more products and stating "or equivalent" in front of specified product: Select any product named or submit request for substitution for any product not specifically named in accordance with Paragraph 1.06.
 - B. All requests for substitution shall be made in accordance with Division 1 and the General Conditions.
 - C. Cost to Electrical Contractor or Bidder for review of Substitution Request:
 - 1. Each review of a Substitution Request by the Engineer will be billed to the submitter (Electrical Contractor or Bidder) at an hourly rate of \$200.00 an hour, two hour minimum for each review, whether approved or rejected.
 - a. The Engineer may waive the review cost if in his sole opinion the submittal was complete and the time involved in the review was not substantial, and it was in the best interest of the Owner.
 - D. All requests for substitution shall be in writing and shall indicate all information required thereon, including an itemized comparison of proposed substitution with specified product(s). Representative samples may be required for determination of equality.
 - E. All proposed substitution shall be a standard product of the firm, under current manufacture and be a catalog item at time of bid.
 - F. In making request for substitution, Electrical Contractor can attest that:
 - 1. He personally investigated proposed product or method, and determined that it is equal or superior in all respects to that specified.
 - 2. He will provide the same guarantee or warranty for substitution as for product or method specified.
 - 3. He will coordinate installation of accepted substitution into Work, making such changes as may be required for Work to be complete in all respects.
 - 4. He waives all claims for additional costs related to substitution which subsequently become apparent.
 - G. Submit three (3) copies of substitution request prior to submittals required in accordance with Paragraph 1.6.
- 1.7 SUBMITTALS:
- A. Make submittals for all material to be used on the project, whether as specified or substitutions, within thirty (30) days after award of Contract by the Owner. **Reference the General Conditions and Division 1 Section 01 31 13 for procedures and administration of submittals for this project in addition to the following:**
 - 1. All submittals shall be organized in an electronic folder, identified by Project Title and Section.
 - 2. Identify each item by manufacturer, brand, trade name, number, size rating, and whatever other data is necessary to properly identify and check materials and equipment. Words "as specified" are not sufficient identification.
 - 3. Identify each submittal item by reference to specifications section paragraph in which item is specified, or Drawing or Detail number.
 - 4. All submittals shall be submitted in complete groups, e.g., all light fixtures at one time. No partial or incomplete submittals will be accepted.

5. Organize submittal in the same sequence as they appear in specification sections, articles, or paragraphs.
6. Provide detailed index listing for all submittals.

B. Product Data: Submit separated in groups, as follows:

1. Basic Site Components
 - a. Conduits and raceway types required, including fittings
 - b. Concrete pull-boxes, vaults, and manholes
 - c. Electrical Identification items
 - d. Concrete coloring
2. Basic Materials
 - a. Conduits and raceway types required, including fittings
 - b. Electric wire, cable and connectors
 - c. Electrical boxes and fittings
 - d. Wiring devices
 - e. Each type of support, anchor, sleeve, and seal
 - f. Fire stopping Material
 - g. Electrical Identification items
 - h. Junction Boxes
 - i. Time Clocks
 - j. Terminal Cabinets
3. Distribution Equipment
 - a. Switchboards
 - b. Transformers
 - c. Transfer switches
 - d. Panelboards
 - e. Disconnects and Starters
 - f. Terminal Cabinets
4. Lighting
 - a. Fixtures
 - b. Lighting Controls
5. Any Additional System

C. Shop Drawings: Upon product review, submit shop drawings showing physical arrangement, wiring diagrams, construction details, finishes, materials used in fabrication, provisions for conduit entrance, access requirements for installation and maintenance, physical size, electrical characteristics, foundation and support details, weight, power sources, circuit numbers. Shop drawings shall be compatible with the Contract Drawings and Specifications.

Show wiring as actually installed, connected, and identified for this specific project. Include identification of cables and cable conductors.

Shop and instruction drawings shall cover the equipment or device to be installed and not merely the general class of such equipment or device.

Submit four prints and one reproducible as follows:

1. Panelboards
2. Special Manholes and Vaults

D. Samples: Submit single, factory boxed production run samples identical to equipment to be supplied, as follows. Samples will be retained for analysis and comparison purposes.

1. Receptacles

2. SPST and 3-way switches
3. Base cover plates

1.8 DOCUMENTATION:

- A. Construction Record Drawings: The Electrical Contractor shall furnish to the Engineer, in accordance with the GENERAL REQUIREMENTS, a complete set of "as constructed" drawings which clearly indicate all deviations from the basic contract drawings, including exact dimensioned locations and depths for all stubbed conduits, location and size of spare conduits and conductors, all new and uncovered existing work outside the buildings, power feeder runs, and communications "primary" conduit runs. Corrections and changes shall be kept up-to-date at all times.
- B. All submittals and shop drawings shall be resubmitted with record drawings showing all revisions and changes made, clearly marked with field termination wire so as to reflect actual construction record conditions. Revision and changes will be enumerated and new dates of drawings shown. Grouped submittals shall be combined into loose leaf binders.
- C. Structural Conditions:
 1. Location as indicated on the drawings show the arrangements desired for the principal apparatus, fixtures, etc., and shall be followed as closely as possible. Proper judgment shall be exercised in carrying on the work to secure a neat arrangement of the electrical systems and to overcome local difficulties and interferences of structural conditions wherever encountered.
 2. Notching and boring of structural members must be held to an absolute minimum. Electrical Contractor shall lay out his work and obtain the approval of the Owner's Representative for necessary holes and notches before proceeding with the work. Where notches and holes are approved, they shall be carefully held to the minimum sizes actually required.
- D. Cutting and Patching: The Electrical Contractor shall be responsible for the cutting and patching of rough or finish work required by his installation. Patching shall be of the same material, finish and workmanship as the original work, and when required by the Owner's Representative, done by mechanics of the original trade.

1.9 SEISMIC RESTRAINT AND ANCHORAGE:

- A. Provide complete seismic anchorage and bracing for the lateral and vertical support of conduit and electrical equipment in accordance with latest edition CBC, Chapter 16 and Table 16A-O, and all provisions of this Section.
- B. Submit calculations prepared and signed by a Structural Engineer licensed in the State of California, showing compliance with the above for all electrical equipment weighing more than 50 pounds, excepting items corresponding exactly in configuration and weight to those specified and detailed. Where anchorage details are not shown on drawings, the field installation shall be subject to the approval of the Architect and Electrical Engineer.
- C. All equipment mounted on concrete shall be secured with steel stud expansion anchors requiring a drilled hole. Power driven anchors are not acceptable. Minimum spacing shall be ten (10) diameters center to center and five (5) diameters center to edge of concrete. Maximum allowable stresses for tension and shear shall be 80% of the ICBO test report values. Hilti, Phillips.

1.10 EXISTING SUB-SURFACE STRUCTURES

The Electrical Contractor shall examine all record drawings made available by the Owner to locate existing underground systems, utilities, conduits, and pipes prior to installing the electrical distribution system. The Electrical Contractor shall also examine the site for possible locations of sprinkler pipes. Any damage done to the existing systems during the course of the electrical work, whose locations could be reasonably determined, shall be repaired to the satisfaction of the Owner and the utility or agency involved, at the expense of the Electrical Contractor.

1.11 PORTABLE OR DETACHABLE PARTS:

The Electrical Contractor shall retain in his possession and shall be responsible for, all portable and detachable parts or portions of the installation, such as fuses, keys, locks, adapters, locking clips, and inserts, until final completion of his work. These parts shall be itemized and delivered to the Owner at Project Closeout.

1.12 OPERATION AND SERVICE MANUALS:

- A. The Electrical Contractor shall prepare manuals describing the operations, service, and maintenance requirements of, and complete parts lists for all electrical equipment.
- B. Equipment: Equipment described in the manual shall include all equipment listed under "Submittals", and all other auxiliary miscellaneous systems.
- C. Information contained in the manual shall consist of 8½" x 11" size catalog data on each item, together with parts lists, description of operation, maintenance information, shop drawings, wiring and riser diagrams, and test reports as installed. Catalogs and data in the manuals shall be neat, clean copies. Drawing shall be accordion folded to letter size and installed in an envelope within the manual. An index shall be provided, which shall list all contents in an orderly manner with the respective equipment supplier's name, address and telephone number, and the manufacturer's recommended servicing instructions. Diagrams shall be complete for each system installed. Provide divider sheets with identifying tabs between each category.

1.13 INDEPENDENT TESTING AND CERTIFICATION:

- A. General: The Electrical Contractor shall provide the services of an independent testing and certification company acceptable to the Owner to inspect, test, and certify the electrical equipment and installation as indicated by Division 26 Specification Sections and as generally summarized as follows.
 - 1. The testing firm shall provide all material, equipment, labor, and technical supervision to perform such tests and certifications.
 - 2. It is the purpose of these tests to assure that all tested electrical equipment is operational and within industry and manufacturer's tolerances and is installed in accordance with design specifications.
 - 3. The tests and shall determine suitability for energization.
- B. Qualifications of Testing Firm:
 - 1. The testing firm shall be a corporately-and financially independent testing organization that can function as an unbiased testing authority, professionally independent of the manufacturers, suppliers, and installers of equipment or systems evaluated by the testing firm.
 - 2. The testing firm shall be regularly engaged in testing of electrical equipment devices, installations, and systems.

3. The testing firm shall meet OSHA criteria for accreditation of testing laboratories, or be a Full Member Company of the International Electrical Testing Association (NETA).
 4. The lead, on-site, technical person shall be currently certified by the International Electrical Testing Association (NETA) or National Institute for Certification in Engineering Technologies (NICET) in electrical power distribution system testing.
 5. The testing firm shall utilize engineers and technicians who are regularly employed by the firm for testing services.
 6. The terms used here within, such as Testing Company, shall be construed to mean the testing firm.
- C. Methods: Testing methods and equipment utilized by the Testing Firm shall be in accordance with applicable sections of the NETA "Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems".
- D. Testing shall be performed and certification approved before energy is applied to items tested.
- E. All test equipment will be noted with factory calibration certification and date.
- F. Any item dismantled or reconnected by the Electrical Contractor after test and certification will be retested and recertified before energy is applied.
- G. Any items not meeting the Manufacturer's tolerances or performance criteria shall be corrected by the Electrical Contractor and retested and recertified before energy is applied.
- H. Tests and certification report shall be submitted in accordance with the applicable sections of these specifications. Tests shall be presented in an organized binder with subheadings for all line ups and tests performed with results therein.
- I. Items not passing Manufacturer's recommended tolerances will be enumerated on a separate set of sheets before each section.
- J. Coordination: The Electrical Contractor shall notify Architect or Engineer of testing schedule a minimum of one (1) week in advance of performance of any test.
- K. Testing Firm Test and Certification Summary:
1. Main Switchboards
 2. Solid State Circuit Breakers
 3. Ground Fault Protected (GFI) circuit breakers
 4. Isolation Panelboards

1.14 PENETRATIONS:

- A. Fire Rated Surfaces: Conduits or cables passing through fire rated walls, floors, ceilings, partitions, etc., of greater than one (1) hour construction shall be sleeved. Conduits shall be centered in the sleeve and the annular space around the conduit or cable shall be sealed with fire rated materials in accordance with California State Fire Marshal requirement and approvals and as called for in the specifications.
- B. Concrete and Masonry: All conduits passing through concrete or unit masonry walls, floors, or foundations shall be sleeved to allow seismic movement of the building structure without overstressing of the conduit and its connections.

1.15 PRELIMINARY OPERATION:

The Owner reserves the right to operate portions of the electrical system on a preliminary basis without voiding the guarantee or relieving the Electrical Contractor of his responsibilities.

1.16 GUARANTEES:

All material furnished and installed under this Contract shall be new and free from all defects and shall be guaranteed for a minimum period of one (1) year from date of acceptance of the work. Should any trouble develop during this period, due to defective material or faulty workmanship, this Electrical Contractor shall furnish all necessary materials and labor to correct the trouble without any cost to the Owner. Any defective material or inferior workmanship noticed at the time of installation shall be corrected immediately to the entire satisfaction of the Owner or his representative.

1.17 DEMOLITION:

- A. Demolition: The Electrical Contractor shall modify or remove the existing electrical installation as required by the building alterations within the area of alteration work. All removed material not to be reused or retained by the Owner shall become the property of the Electrical Contractor and shall be removed from the site. Electrical Contractor shall be responsible for de-energizing electrical circuits in demolition area so as to ensure safe working conditions.

In walls, and ceilings to be removed, do circuit check to determine if areas beyond work will be affected and provide temporary feeds to them; disconnect and remove all electrical devices, fixtures and other devices. Cut off and seal all unused floor penetrations for existing wire not utilized. Remove conduit in exposed location. Abandon in place unused conduit in concealed locations after removing wire.

B. Continuity of Service:

1. The Electrical Contractor shall permanently reroute or relocate existing wiring and/or equipment which is required, while maintaining existing systems in use.
2. Utility Work Approval: The Electrical Contractor shall give required notice and obtain approval from the utility company prior to commencing work.
3. Service outages shall be kept to an absolute minimum. There shall not be any interruption of power to any building or portion of a building that is not agreed upon by the Owner and Engineer in writing. Any outages shall occur only at times convenient to the Owner, predominately between the hours of midnight and 6:00 a.m. The Electrical Contractor's necessary work associated with outages shall commence upon de-energization and shall continue uninterrupted until normal power is restored. Electrical Contractor shall maintain optimal crew size to keep outage time to a minimum.
4. Premium Pay: Any overtime work required to comply with the above paragraph shall be included as part of this contract. No additional payments will be authorized for work performed on weekends, holidays or other than normal working hours, as required to schedule outages at Owner's convenience.

END OF SECTION 26 10 00

SECTION 26 11 00 - ELECTRICAL RELATED WORK

PART 1 GENERAL

1.1 SCOPE:

- A. Provide all related work required for installation of electrical systems.
- B. Types of electrical related work specified in this section include the following:
 - 1. Excavating for Electrical Work:
 - Underground electrical wiring and service tunnels.
 - Independent (isolated) foundations.
 - Underground electrical vaults.
 - 2. Concrete for Electrical Work:
 - Equipment and pole fixture bases, conduit caps.
 - Lean concrete backfill to support electrical work.
 - Encasement of electrical work.
 - Underground structural concrete to accommodate electrical work.
 - Vaults for electrical work.
 - Electrical equipment foundations and mounting pads.
 - Rough grouting in and around electrical work.
 - Patching concrete which has been cut to accommodate electrical work.

1.2 PROJECT CONDITIONS:

- A. Existing Utilities: Locate and protect existing utilities and other underground work in manner which will ensure that no damage or service interruption will result from excavating and backfilling.
- B. Protect property from damages which might result from excavating and backfilling.
- C. Protect persons from injury at excavations by barricades, warnings, and illumination.
- D. Coordinate excavations with weather conditions to minimize possibility of washouts, settlements and other damages and hazards.
- E. Keep the work site clean and free from rubbish and debris. The Electrical Contractor shall also abate dust nuisance by cleaning, sweeping, and sprinkling with water, or other means as necessary.
- F. Materials and equipment shall be removed from the site as soon as they are no longer necessary; and, upon completion of the work and before final inspection, the entire work site shall be cleared of equipment, unused materials, and rubbish so as to present a satisfactory clean and neat appearance. All cleanup, dust control, and project site maintenance costs shall be included in the Electrical Contractor's bid.

1.3 PROTECTION AND RESTORATION OF EXISTING IMPROVEMENTS:

- A. Unless otherwise provided, the Electrical Contractor shall repair or replace all existing improvements (e.g., curbs, sidewalks, driveways, fences, signs, utilities, street surfaces, structures, etc.) damages or removed as a result of his operations. Repairs and replacements shall be at least equal to existing improvements and shall match them in finish and dimension.

- B. Trees, lawns and shrubbery not designed for removal shall be protected from damage or injury. If damaged or removed because of the Electrical Contractor's operations, they shall be restored or replaced in as nearly the original condition and location as is reasonably possible. Lawns shall be reseeded and covered with suitable mulch.

PART 2 PRODUCTS

2.1 BACKFILL ELECTRICAL WORK:

- A. Bottom of Trench to 6" above Conduit Material: Well graded sand.
- B. Backfill Material: Sandy or silty loam, free of lumps, laid in 6" layers, uniformly mixed to proper moisture and compacted to required density.

2.2 CONCRETE WORK:

- A. Equipment Bases: 2500 psi concrete and reinforcing in accordance with Division 03 concrete.
- B. Pole Fixture Bases: 3000 psi concrete and reinforcing in accordance with Division 03 concrete.
- C. Conduit Cap/Encasement: 2000 psi concrete slurry.

PART 3 EXECUTION

3.1 EXCAVATING FOR ELECTRICAL WORK:

- A. General: Do not excavate for electrical work until work is ready to proceed without delay, so that total elapsed time from excavation to completion of backfilling will be minimal.
- B. Excavate with vertical-sided excavations to greatest extent possible, except where otherwise indicated. Where necessary, provide sheeting and cross-bracing to sustain sides of excavations. Remove sheeting and cross bracing during backfilling wherever such removal would not endanger the work or other property. Where not removed, cut sheeting off at sufficient distance below finished grade to not interfere with other work.
- C. Width and Cover: Unless otherwise noted, minimum earth cover above conduit shall be 36". Excavate for conduit with 6" to 9" clearance at both sides of conduit, except where otherwise shown or required for proper installation of joints and fittings. Excavate for other electrical work to provide minimum practical but adequate working clearances.
- D. Depth for Subbase Support: Where installation of subbase material is indicated, excavate for installation of subbase material in depth indicated or, if not otherwise indicated, 6" below bottom of work to be supported.
- E. Excavate near large trees (within drip line) by hand, and protect the root system from damage or dry out to greatest extent possible. Verify trench locations with Architect or Engineer prior to trenching. Maintain moist condition for root system and cover exposed roots with burlap.
- F. Store excavated material (temporarily) near excavation, in manner which will not interfere with or damage excavation or other work. Do not store under trees (within drip line).
 - 1. Retain excavated material which complies with requirements for backfill material.
 - 2. Dispose of excavated material that is either in excess of quantity needed for backfilling or does not comply with requirements for backfill material. Remove unused material from project site, and dispose of in lawful manner.

3.2 DEWATERING:

Maintain dry excavations for electrical work by removing water. Project excavations from inflow of surface water. Pump minor inflow of ground water from excavations.

3.3 BACKFILLING:

- A. General: Except as otherwise indicated, backfill with properly qualified backfill material.
- B. Backfill with well graded sand to 6" above conduits.
- C. Condition backfill material by either drying or adding water uniformly, to whatever extent may be necessary to facilitate compaction to required densities. Do not backfill with frozen soil materials.
- D. Backfill simultaneously on opposite sides of electrical work, and compact simultaneously. Do not dislocate the work from installed positions.
- E. Backfill excavations in 6" high courses of backfill material uniformly compacted to the following densities (% of minimum density, ASTM D 1557), using power-driven hand-operated compaction equipment. If backfill is determined to be suitable and required compaction is demonstrated by laboratory test, water compaction in 6" layers may be used, subject to review by Engineer.

Lawn/Landscaped Areas: 85%
Paved Areas, Other Than Roadways: 90%
Roadways: 95%

- F. Backfill to elevations matching adjacent grades, at time of backfilling excavations for electrical work.
- G. Compaction Test: Demonstrate proper compaction by testing at one-half of the trench depth. Perform three (3) tests per 100' of trench.
- H. Encase all underground conduits with concrete to 6" above conduit material before backfilling. PG&E conduits shall be capped with 3" concrete and the top the capping colored red.

3.4 BORING AND CUTTING:

- A. Where trench crosses concrete walks or paved areas bore or saw cut and patch as required for conduit installation. Boring shall be by screw auger or dry ramming. Where soil conditions warrant, (water boring may be allowed on a case by case basis upon approval of the Engineer). No water jetting shall be allowed.
- B. Bore and saw cut as indicated on the plans, or where not indicated; bore under concrete, paved, tiled or permanent surface 20'-0" wide or less. Saw cut permanent surfaces wider than 20'-0" with Engineer's approval.
- C. Depth of saw cutting shall be no greater than 1/4" below slab thickness.

3.5 PERFORMANCE AND MAINTENANCE, EXCAVATION WORK:

- A. Subsidence: Where subsidence is measurable or observable at electrical work excavations during general project warranty period, remove surface (pavement, lawn, or other finish), add backfill material, compact, and replace surface treatment.
- B. Restore appearance, quality and condition of the surface or finish to match adjacent work, and eliminate evidence of restoration to greatest extent possible.

3.6 INSTALLATION OF CONCRETE WORK:

- A. Install concrete for electrical work in accordance with Division 03 and the drawings.
- B. Exposed fixture bases and enclosures shall be Architectural Grade Concrete in accordance with Division 03.

END OF SECTION 26 11 10

SECTION 26 20 00 - BASIC MATERIALS AND METHODS

PART 1 GENERAL

1.1 SCOPE:

Furnish and install material and equipment as indicated on drawings and as specified.

1.2 MATERIALS AND EQUIPMENT:

Shall be new and of the best quality used for the purpose in good commercial practice.

1.3 UL APPROVAL:

All material and equipment within the scope of the UL reexamination service shall be approved by the Underwriters Laboratories for the purpose for which they are used and shall bear their label.

1.4 STORAGE:

All material and equipment shall be stored in a manner to prevent damage or corrosion. Equipment with components which can be damaged by moisture shall be placed in special heated storage facilities.

1.5 DRAWINGS:

Drawings for all equipment are intended to be diagrammatic only. Any location not actually dimensioned is not to be considered as necessarily final or accurate. Exact locations must be determined in the field from the requirements of the equipment that is to be installed.

1.6 COORDINATION:

Before rough-in of any utility lines, services, and feeders, or of any equipment, the Electrical Contractor must coordinate his work with that of other crafts and trades so that these services shall be installed in their proper locations and without interference to the equipment or building structure. This will require cooperation among all crafts and trades, the Inspector, and General Contractor, along with study of shop drawings and the building plans.

1.7 ELECTRICAL WORK EXPOSED TO WEATHER:

- A. All electrical devices and equipment installed in exposed locations shall be protected by suitable NEMA type 3R enclosures, cast steel boxes with gasketed steel covers, or other Engineer approved methods.
- B. All ferrous metal portions of electrical work exposed to weather including conduits, clamps, supports, etc. shall be hot-dipped galvanized.

1.8 SUBMITTALS:

- A. Product Data: Submit manufacturer's data including specifications, installation instructions, and general recommendations for each item submitted under submittals, Section 261000, Paragraph 1.7. Submit calculations in accordance with Paragraph 1.9. **Reference Division 01, Section 01 33 00, Submittal Procedures for the procedures and administration of submittals.**

PART 2 PRODUCTS

2.1 CONDUIT MATERIALS AND COMPONENTS:

- A. Rigid Metal Conduit-Type RMC: All locations as follows excepting those specifically indicated for EMT and PVC. All exterior locations above grade, in concrete walls and slabs, or elsewhere shown on plans. Runs within, passing through or above hazardous areas shall be rigid. RMC shall be new galvanized threaded, conforming to UL 6. All couplings and connectors shall be threaded. RMC shall be specifically used on roofs or on all surfaces of corridor and walkway coverings. Threadless fittings are not allowed.
- B. **Electrical Metallic Tubing-Type EMT: Interior dry locations above ground, exposed only above 60" above floor in non-finished areas where not subject to physical abuse or damage, and exterior walls and underside of eaves above 96" above grade. EMT shall be new galvanized, conforming to UL 797, furnished in 10 foot lengths. In interior locations, EMT shall be coupled with steel setscrew type connectors. In exterior locations EMT shall be coupled with steel compression type couplings requiring the tightening of a nut in all locations. Crimp type or die cast connectors or couplings are not acceptable. Connectors to have nylon insulated throats.**
- C. **Flexible Metal Conduit-Type FMC: Connections from junction boxes to lay-in fluorescent fixtures in accessible ceilings only, 6' maximum. FMC shall be flexible interlocking single strip zinc coated steel with an insulated copper ground wire pulled with the conductors, conforming to UL**
 - 1. **Aluminum FMC shall not be used. Minimum size 3/4". Fittings shall be steel clamp type utilizing two (2) screws, galvanized steel with nylon insulated throat type. FMC is not to be used for connection to permanently fixed equipment.**
- D. Liquidtight Flexible Metal Conduit-Type LFMC: Connections to machinery and equipment only. LFMC shall be flexible interlocking single strip steel conduit with liquid tight exterior cover, with all connections made using galvanized steel liquid tight connectors with "O" ring gaskets and nylon insulated throat and with copper ground wire, American Brass Sealtight or equivalent, conforming to UL 1. LFMC maximum length allowed is 36". LFMC is not to be used for connection to permanently fixed equipment.
- E. Rigid Polyvinyl chloride Conduit-Type PVC.: Underground locations and below vapor barrier of slabs. No PVC shall be installed in slab floors or in exposed locations. PVC conduit shall be schedule 40, Underwriters' Laboratories tested, furnished in 10' lengths, conforming to UL 651-77.
- F. Surface Metal Raceway: Type and locations as noted on the drawings. Provide concealed connections. Paint to match adjacent surface unless noted otherwise.

2.2 OUTLET AND SWITCH BOXES:

- A. Boxes shall be one piece die formed galvanized steel of shape and with fittings necessary to suit location and use. Boxes shall be of sufficient size to contain all wires, devices, and connection fittings required without crowding, minimum 2 gang for receptacles. Ceiling and surface mounted boxes shall be minimum 4" square by 1½" or octagonal. Plaster rings shall be provided where required. Boxes shall be used wherever possible. Where voltages are mixed in the same box (120V/277V), install welded partition barriers to separate the systems.
- B. Exposed boxes shall be cast steel provided with steel gasketed weatherproof covers and utilize only cast metal threaded hub type fittings.

2.3 WIRING DEVICES:

- A. Wall Switches:

1. 120/277 Volt Switches: Quiet slow make, slow break design, toggle handle, with totally enclosed case, rated 20 ampere, heavy duty specification grade conforming to Federal Specification WS896. Provide matching two pole, 3-way, 4-way, and key switches as required. Hubbell or ArrowHart 1221 series.
2. Switch and Pilot Light: Push action type with red handle, integral long-life neon pilot light, rated at 15 ampere, 120 volts.
3. Color: Normal Lighting Circuits; provide ivory, gray, white, and brown colored switches dependent upon room wall finish; as directed by Architect. Emergency power circuits; provide red colored switches.
4. Thermal switches where designated on plans or in specifications shall be equivalent to Square D, Type "F", Class 2510. Thermal switch heater elements shall be rated for overload protection of loads controlled. Switches for special purposes, such as exhaust fans, boiler control, heaters, etc., shall be engraved with 1/8" high letters on plates. Adhesive labels are not acceptable.

B. Receptacles:

1. Duplex Receptacles: Full gang size, polarized duplex, parallel blade, U-grounding slot, specification grade conforming to Federal Specification WC596, rated at 20 amperes, 125 volts, designed for split feed service. Hubbell or ArrowHart 5352 series or equal.
2. Duplex Receptacle - Ground Fault Interrupting: Hubbell or ArrowHart #GF-5362 series or equal. Ground fault interrupting receptacles shall be required within six (6) feet of all sinks and in exterior locations.
3. Nameplates: Provide engraved or embossed plastic for receptacles other than standard duplex receptacles, indicating voltage, phase and amperes.
4. Color: Normal Power Circuits; Provide ivory, gray, white, and brown colored receptacles dependent upon room wall finish; as directed by Architect. Emergency Power Circuits, provide red colored receptacles.

2.4 WALL PLATES:

- A. Provide plate for each wiring device, or as required to protect or cover-up existing conditions left exposed due to the removal of existing devices, conduits, or equipment.
- B. Interior Flush: All locations unless noted otherwise, stainless steel (0.35") satin finish, Sierra "S" series.
- C. Weatherproof Plates: Steel, gasketed, for receptacles, provide spring loaded gasketed doors. Provide at all weatherproof locations.
- D. Where two gang boxes are required for single gang devices, provide special plates with device opening in one gang and second gang blank.
- E. Receptacle Plates: Each receptacle plate shall be identified with the panel number and the circuit number. This identification shall be with engraved phenolic labels applied to plate with permanent contact cement. Labels shall be 5/16" high, gray phenolic plastic, with 1/8" high white engraved lettering. Special receptacles shall also indicate voltage, phase, and amps.
- F. Multi-Gang Switch Plates: Where three or more switches occur at a common location, provide engraved labeling, 1/4" high (black), on the switch plate(s) indicating areas or fixtures served by each switch. Submit schedule to Engineer for approval.
- G. Blank bushed or special outlet plates shall be provided for all signal systems outlets as required.

2.5 FLOOR BOXES:

- A. Floor Boxes: Raised floor compatible fully adjustable type with round brass faceplate, deep fill type. Walker 886 series, Hubbell or Steel City equivalent.
- B. Receptacle Floor Fitting: Brass, duplex flap Walker 895 series or equivalent.
- C. Telephone Floor Fitting: Brass round opening, combination 2¼" x 1", Walker 866 CK-1 series or equivalent.

2.6 WIRE:

A. Low Voltage - (Under 600 Volt):

- 1. Feeder and Branch Circuit Wire: Copper type THWN/THHN, 600 volt, from new fresh stock, bearing UL label, delivered to site in unbroken packages; minimum size 12 AWG. All 20/1 home runs over 180 feet from panel for 277 volt circuits, and 100 feet from panel for 120 volt shall be increased to next larger size. All conductors shall be stranded copper. All control, signal, and communication wires shall be stranded. Fire alarm wire shall be solid.
- 2. High Temperature Wire: NEMA type AF or SFF-2 stranded, for fixture wires and circuit runs within fixtures.

2.7 TERMINAL CABINETS:

A. Telephone and Signal System Cabinets:

- 1. Telephone and signal system cabinets for collection of individual device or outlet homeruns, or mounting of equipment shall be 24" wide x 36" high x 6" deep unless otherwise noted. Cabinets shall be provided with ¾" fire treated plywood backboard "Dricon", conforming with CBC Section 207, one piece per cabinet, sized to maximum dimension of cabinet.
- 2. Cabinets shall be provided with vertical barriers as required separate conduits of different signal systems, one partitioned area per system type; i.e. fire alarm, clock, etc.
- 3. Cabinets located in finished areas; classrooms, corridors, storage rooms, etc. shall be flush mounted, constructed to match lighting panelboards, with concealed flush door hinges and concealed face panel trim clamps. Provide with flush lock keyed to match panelboard locks.
- 4. Cabinets located in electrical rooms or electrical closets may be screw cover type with continuous hinged door, surface or flush to match adjacent panels.

PART 3 EXECUTION

3.1 INSTALLATION OF CONDUIT RACEWAYS:

- A. General: Install conduits in a neat manner, concealed except as noted. Mount conduits directly to building structure with clamps or two hole straps where possible. Secure straps with cadmium plated wood screws into wood, and machine screws into metal or inserts preset in concrete. Where impractical to secure directly to structure, suspended on conduit hangers. Wherever possible, group and rack multiple conduit runs.
 - 1. Conduit Size: All branch circuit homeruns, and conduit runs containing more than two (2) circuits shall be a minimum of ¾" diameter.
- B. Installation and Cleaning: Install free from dents, kinks and bruises. Plug ends at time of installation to prevent entry of dirt or moisture. Thoroughly clean out conduits before installing conductors. Thoroughly clean all exposed conduit exteriors.

- C. Provide tagged pullwire in all empty conduits. Pullwire shall be 1/4" Kevlar high strength measuring tape #39243 with a minimum breaking strength of 1250 pounds. Leave 36" free coiled each end. Tagging all runs shall include the source and destination locations.
- D. Plastic conduit shall be installed in accordance with manufacturer's recommendations and accepted trade practice. Where plastic conduit runs rise above ground in exposed locations, the riser bend and riser shall be of 40 Mil PVC coated galvanized rigid metal conduit installed according to rigid metal portion of this specification section.
- E. All plastic, flexible, feeder and receptacle branch conduits shall carry a grounding bond wire with the size as shown, or where not shown, as determined by applicable codes for the ampacity of the circuit being carried.
- F. Protective Coating: All metallic conduits installed in contact with earth, or in concrete in contact with earth, shall be coated with a minimum 40 Mil PVC coating on all conduit lengths and fittings. The coating shall correspond to ATSM D638-68, D1706, D140-64, and D746-64T specifications and Federal Test Standard 141, Method 615z. Coating shall be continuous without flaws showing exposed metal. Coating shall extend to the device conduit is terminated to in exposed locations and 12" above grade in unexposed locations. Tape wrapped conduit is not acceptable.
- G. Conduits which stub-up from or through floor slabs shall be installed so that none of the curved portion of the elbow is exposed. Conduits stubbed up shall be rigid type with coupling installed flush floor to permit future conduit removal. Seal unused conduit with a flush threaded pipe plug.
- H. Conduit Routing: Route exposed conduits parallel or perpendicular to walls or floors. Install conduits in masonry walls at time of wall construction. No conduits shall be run under heavy equipment, footing or other structural elements. Where runs must cross footings, install in sleeves per structural details.
- I. Conduit Runs in Ceiling Areas: Conduits running above accessible ceiling shall be routed parallel or perpendicular to ceiling system and structural members. All conduit runs shall be coordinated to avoid conflicts with mechanical and structural systems, lighting fixtures and ceiling support system. Conduits shall be installed as close to the structure above as possible to avoid conflict with removal of ceiling panels. It is specifically not permitted to attach or support conduit from ceiling system suspension wire. Exposed cables shall be strapped to the structure above the accessible ceiling.
- J. Conduits Penetrating Membranes: Where conduits penetrate wall or slab membrane moisture barriers, penetration shall be sealed in accordance with the requirements of applicable sections of these Specifications for "Thermal and Moisture Protection."
- K. Conduits Penetrating Roof: Provide flashing and counter flashing making watertight joints where conduits pass through roof or waterproofing membranes.
- L. Escutcheons: Conduits penetrating wall, floors, or ceiling in exposed locations shall be installed with appropriate escutcheon plates.
- M. Separations: Coordinate with all other crafts to allow minimum of 12" running and 6" crossing clearance at flues, hot water pipes, steam pipes, and heat sources. Keep electrical conduits free from contact with all other piping runs of other systems or of dissimilar metals.
- N. Concrete Encased Conduits: All conduits installed underground shall be encased with 2,000 psi concrete to a minimum of 6" above the conduit. The top of concrete encasements for feeds greater than 600 volts shall be colored red.
- O. Conduits Crossing Building Joints: Conduits shall not be run in concrete slab or wall construction where passing through an earthquake or expansion joint. At such condition,

conduit shall be run exposed or in furred ceiling space with 24" length of flexible conduit crossing joints.

- P. Conduits Penetrating Floors and Walls: Provide grouting around raceways where penetrating floor slabs, concrete or masonry walls. At fire separation walls or floors, use Engineer and CSFM approved expanding type intumescent foam, to maintain the fire rating of the surface penetrated.
- Q. Conduit Support: Support of conduit and tubing in steel stud walls shall be by #18 gauge steel wire, secured to steel bars or straps attached to steel studs. Conduits rising vertically between wall studs shall be tied to a horizontal cross support attached tightly to eliminate any movement.
- R. Conduits Installed Below Floor Slabs: Conduits 1" diameter and smaller may be installed below concrete slab vapor barriers or sand fill by shallow scraping and recovering with earth as required to bury just below surface. Install to minimize disruption to engineered fill. Conduits larger than 1" shall be trenched to a minimum depth of 12" below slab and backfilled and compacted in accordance with Section 26110.
- S. Conduits Installed in Area of Footings: Conduits installed in the area of footings shall be installed per the applicable structural details and the electrical details for installing conduits in the vicinity of footings.
- T. Conduit Hangers:
 - 1. Conduit hangers spaced at 8'-0" on center maximum with one hanger adjacent to each outlet box, shall be installed wherever conduit cannot be directly attached to structure. Hangers shall be secured to wood structures with steel brackets and wood screws; to steel structures with appropriate clamps complete with positive attachment restraining strap or hook rod to prevent slippage; and to concrete structures with preset imbedded inserts or machine screws with expansion shields. Preset inserts are preferred to provide a secure anchorage with greatest location flexibility. Power or velocity driven type attachments will not be allowed. Complete hanger installation shall provide a safety factor of five (5) based upon maximum CEC allowed conduit fill.
 - 2. Hangers for rigid conduit and EMT 2" and smaller in concealed spaces shall be galvanized perforated type strap wrapped around raceway and bolted; then fastened to structure as described above.
 - 3. Hangers for exposed conduit and tubing suspended below ceilings shall be steel rods 1/4" size for up to 2" and 3/8" for larger size conduits, with adjustable pipe ring; Steel City #C-149, Fee and Mason #199 or #201, or approved equivalent.
 - 4. Trapeze type supports shall be used where conduits are run grouped together. Such hangers shall consist of 3/8" minimum steel rods, structural steel channels, and clamps of Kindorf, Unistrut, or approved equivalent manufacture.
 - 5. Electrical Contractor shall furnish concrete inserts to General Contractor, and coordinate location.

3.2 INSTALLATION OF JUNCTION BOXES AND INTERIOR PULL BOXES:

Locate pull boxes and junction boxes above removable ceilings or in electrical rooms, utility rooms, or storage areas. No junction box shall be installed in an inaccessible area. Exposed boxes shall be cast with gasketed weatherproof covers.

3.3 INSTALLATION OF EXTERIOR PULL BOXES AND MANHOLES:

- A. Where pull boxes are used without bottoms, they shall be set on 3/4" crushed rock of a volume equal to that of the pull box used.

- B. Where pre-cast units are used, all joints are to be tongue and groove, sealed with a suitable sealer.
- C. Where conduits enter, they shall be properly bushed and extended a minimum ½" from inside of wall into pull box.
- D. All conduits entering pull boxes and manholes shall be sealed watertight with suitable duct sealing compound.

3.4 INSTALLATION OF OUTLET AND SWITCH BOXES:

- A. Mounting: Mount outlet boxes flush in finished areas other than mechanical rooms, electrical rooms, and above removable ceilings. Boxes shall be set true and flush with all necessary and correct adapters and/or plaster rings. All boxes set deeper than code allowable shall be corrected by use of factory made extension rings such as Raco #976 or equivalent. Boxes in wood construction shall be mounted to support with wood screws.
- B. Device Locations: Locations of devices on plans are approximate only. Electrical Contractor shall study the architectural and structural plans and locate the outlets so that his work is coordinated with the work of others and the fixtures and devices present a pleasing and symmetrical appearance when installed. The location of outlets centered on any architectural feature shall be exact. Outlet locations may be moved a maximum of ten (10) feet from the location shown on the plans before roughing-in without cost to Owner. Switches in relation to door swings and cabinets must be coordinated with architectural drawings. This Electrical Contractor shall coordinate with Mechanical Contractor regarding thermostat outlets and other equipment locations.
- C. Device Height: The following dimensions for locating wall outlets represent the distance from the finished floor to the center of the outlet, unless noted otherwise.

OUTLET	INCHES
Telephone	18
Convenience receptacle	18
Lighting switch	44
Clock outlet	84
Wall mount telephone	44

Adjust outlet mounting height to agree with required location for equipment served.

- D. Boxes Located in Stud Walls: Securely mount with screws to studs or blocking so that box face is straight and true with finish wall alignment. Install backing to align box where studs are twisted or crooked, and as required to meet dimensioned or detailed device spacings. Blocking material shall be same as wall studs and shall be attached to two adjacent studs.
- E. Boxes in Counterbacks or Casework: Install in accordance with architectural details. Where not indicated in details, the Architect or Engineer shall be consulted prior to installation.
- F. Boxes Above Accessible Suspended Ceilings: Mount to horizontal trapeze hangers, secured to rod attached to structure above. It is specifically not permitted to attach or support boxes from ceiling system suspension wire. Conduit and boxes shall be located a minimum of 12" above ceiling where suspended depth permits. Conduit and boxes shall not be installed prior to ceiling unless system is attached or braced to structure as to prevent horizontal movement of conduit.
- G. Boxes Located in Masonry Walls: Coordinate cutting of masonry walls to achieve neat openings for boxes. Use rotary cutting equipment to cut masonry work for installation. Where furring occurs, install extension rings to bring box flush to furred surface. Where masonry is the

finished surface, locate boxes uniformly for each height at either the top or bottom of a block course and install so that device plate will fit tight to block wall without extending over mortar joints.

- H. Outlets in Acoustical Tile Ceilings: Locate either centered on the joint between tiles, or in the center of a tile. All such outlet locations shall be carefully planned and verified with the Architect or Engineer.
- I. Exterior Wall Outlets: Conduits shall enter boxes or exterior wall mounted devices at the sides or top only. No conduit shall enter the bottom of such boxes.
- J. Common Boxes and Alignment: Devices shown adjacent to each other at the same mounting location shall be gang under a common plate, except for outlets of different voltages such as telephone and duplex receptacles. Outlets mounted one over the other, or side by side, shall be in exact alignment, centered on one another.
- K. Sound Control: Boxes and conduit shall be installed in a manner that minimizes sound transmission between rooms. Boxes mounted in a common wall shall be offset horizontally a minimum of 12" and mounted in different stud spaces wherever possible. No boxes shall be mounted back to back. No through boxes shall be used. Offset boxes may be connected with flexible conduit not to exceed 18" length.
- L. Sealing: All unused holes or openings in boxes shall be slugged or sealed by an acceptable means.

3.5 INSTALLATION OF WIRING DEVICES:

- A. Devices shall be securely fastened to outlet box with face flush with plate.
- B. Mount receptacles vertically in appropriate boxes with grounding pin towards floor, except where noted for horizontal installation.

3.6 INSTALLATION OF WALL PLATES:

Install coverplates on wiring devices. Plates shall be set plumb and flush with finish wall surface. Plates located adjacent to one another shall be exactly the same height.

3.7 INSTALLATION OF WIRE:

- A. Scope: Provide all wiring for complete electrical work, installed in code conforming raceway. Branch circuit wiring shall be #12 AWG minimum, unless noted otherwise.
- B. Home Runs: Branch circuit conductors shall home run to panelboards or motor control centers in groupings shown on the drawings. Combining branch circuit home run conductors in single conduits other than that shown shall not be permitted.
- C. Color Coding shall be strictly adhered to and shall be as indicated in Section 26 21 00 ELECTRICAL IDENTIFICATION:
 - 1. Color coding utilized shall be noted on electrical "as constructed" drawings and shop drawings.
 - 2. The color coding for control circuit wires will be as noted on the plans or as agreed upon with the Architect or Electrical Engineer and will be of a color other than that designated for the phase wires. Where control wires are installed and various colors are used, they shall be noted on them "as constructed" drawings and shop drawings turned in at the completion of the job.

- D. Pulling: Use approved wire pulling lubricant for pulling #4 AWG and larger wire. Oil or grease is prohibited as a conductor pulling lubricant. All conductors #8 and smaller shall only be pulled by hand. Pulling lubricant for conductors over 600 volt shall be approved by the conductor manufacturer and the Architect or Electrical Engineer.
- E. Splices & Terminations: Join the conductors securely, both mechanically and electrically using crimp, compression, or Scotch Lok type connectors, except that screw-on type connectors shall not be used for conductors larger than #6 AWG. Splices and terminations of conductors larger than #10 AWG shall be made using an oxide inhibitor (NoAlox or equal). The splice area shall be taped to provide equal or greater insulation than the original. Tape run-back over the original insulation shall extend 3 to 5 overall diameters of the insulated conductor. Type of connectors used shall be submitted to the Engineer for approval.

No splices in conductors over 600 volt or feeders over #6 AWG permitted.

- F. Splice only in accessible junction or outlet boxes.
- G. Wiring in panelboards, switchboards, cabinets, and junction boxes shall be neatly installed. Wiring shall be grouped, laced or clipped, and fanned out to wiring terminals.
- H. Identification and Markings: Provide identification and markings as indicated in Section 26 21 00 ELECTRICAL IDENTIFICATION.
- I. Cable Testing:
1. All wires under 600 volt potential, #6 or larger shall be tested as follows:
 - a. Continuity test to insure proper cable connection.
 - b. Insulation resistance test on each conductor with respect to ground and adjacent conductors. Applied potential shall be 1000 Volts dc for 1 minute.
 - c. Readings shall be recorded and handed in with the record drawings at the completion of the project.
 2. Test Values: Minimum insulation resistance values shall be not less than 5 megohms.

3.8 INSTALLATION OF TERMINAL CABINETS

- A. Install cabinets flush, straight and true, with top aligned with any adjacent panelboards.
- B. Terminate conduits in cabinet with lock nut and bushing or lock nut and grounding bushing. Conduits shall be located in front of plywood backboard, minimum 1" from rear of terminal cabinet (measured from edge of conduit).
- C. Install a minimum of two (2) ¾" and two (2) 1" conduits from each cabinet stubbed to accessible attic or ceiling space for future connections.
- D. Terminate wiring on terminal blocks or strips. All wiring shall be neatly cabled or fanned. Label conductors and cables, including spares with plastic Panduit MP series labels, and corresponding location on terminal or punch block with permanent black marker.
- E. Identify all conduits terminating in terminal cabinets, new and existing, with waterproof permanent black marker on conduit surfaces close to terminal cabinet or inside terminal cabinet adjacent to conduits. Electrical Contractor shall furnish a supplemental diagrammatic layout of conduits inside each terminal cabinet at Project Closeout.

END OF SECTION 26 20 00

SECTION 26 21 00 - ELECTRICAL IDENTIFICATION

PART 1 GENERAL

1.1 SCOPE:

- A. Furnish and install identification of electrical materials, equipment, and installations, including but not limited to the following:

Buried electrical line warnings
Identification labeling for raceways, cables, and conductors.
Warning and caution signs.
Equipment labels and signs.

- B. Refer to other Division 26 sections for additional specific electrical identification associated with specific items.

1.2 SUBMITTALS:

- A. Product Data: Submit manufacturer's data for each type of product specified.

PART 2 PRODUCTS

2.1 GENERAL:

- A. Underground Line Marking Tape: Permanent, bright colored, continuous-printed, plastic tape compounded for direct-burial service not less than 4" wide by 4 mils thick. Printed legend indicative of general type of underground line below.
- B. Wire/Cable Designation Tape Markers: Vinyl, self-adhesive, wraparound, cable/conductor markers with preprinted numbers and letter.
- C. Plastic Write-on Tags: 0.015" thick, all-nylon, accepts waterproof ink labeling, Panduit MP series or Engineer approved equivalent; 3/4" x 3-1/2" for panelboard and switchboard circuits, 3/4" x 1-3/4" for signal, communication, and fire alarm circuits.
- D. Brass or Aluminum Tags: Metal tags with stamped legend, punched for fasteners. Dimensions: 2" x 4" (19 gauge).
- E. Engraved, Plastic-Laminated Labels, Signs, and Instruction Plates: Engraving stock melamine plastic laminate, 1/16" minimum thick for signs up to 20 square inches, or 8" in length; 1/8" thick for large sizes. Engraved legend and color as indicated.
- F. Baked-Enamel Warning and Caution Signs for Interior Use: Preprinted aluminum signs, punched for fasteners, with colors, legend, and size appropriate to the location.
- G. Exterior Metal-Backed Butyrate Warning and Caution Signs: Weather-resistant, nonfading, preprinted cellulose acetate butyrate signs with 20-gage, galvanized steel backing, with colors, legend, and size appropriate to the location. Provide 1/4" grommets in corners for mounting.
- H. Fasteners for Plastic-Laminated Labels and Metal Signs: Self-tapping stainless steel screws or number 10/32 stainless steel machine screws with nuts and flat and lock washers.

- I. Cable Ties: Fungus-inert, self-extinguishing, one-piece, self-locking nylon cable ties, 0.18" minimum width, 50-lb minimum tensile strength, and suitable for a temperature range from minimum 50°F to 350°F. Provide ties in specified colors when used for color coding.

PART 3 EXECUTION

3.1 GENERAL:

- A. Lettering and Graphics: Coordinate names, abbreviations, colors, and other designations used in electrical identification work with corresponding designations specified or indicated. Install numbers, lettering, and colors as approved in submittals and as required by code.
- B. Install identification devices in accordance with manufacturer's written instructions and requirements of CEC.
- C. Sequence of Work: Where identification is to be applied to surfaces that require finish, install identification after completion of finish work.

3.2 CONDUIT IDENTIFICATION:

- A. High-Voltage Feeder Conduits: Identify feeder conduits (over 600v) by words "DANGER-HIGH VOLTAGE" in black letters 2" high, stenciled at 10-foot intervals over continuous painted orange background on entire surface of exposed conduits.
- B. Underground Electrical Line Identification: During trench backfilling, for exterior underground power, signal, and communications service lines, install continuous underground plastic line marker, located directly above line at 12" below finished grade. Where multiple lines installed in a common trench or concrete envelope do not exceed an overall width of 16", install a single line marker.

3.3 CONDUCTOR COLOR CODING:

- A. Color Coding: Provide color coding for secondary service, feeder, and branch circuit conductors throughout the project secondary electrical system as follows:

<u>208/120 Volts</u>	<u>Phase</u>	<u>480/277 Volts</u>
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray
Green	Ground	Green

- B. Color:

1. Use conductors with factory-applied color for wire sizes No. 10 AWG and smaller.
2. For conductors larger than No. 10 AWG, apply colored, pressure-sensitive plastic tape in half-lapped turns for a distance of six (6) inches from terminal points and in boxes where splices or taps are made. Apply the last two laps of tape with tension to prevent possible unwinding. Use 1" wide tape in colors as specified. Do not obliterate cable identification markings by taping. Tape locations may be adjusted slightly to prevent such obliteration.
3. For conductors 10 AWG and smaller being fed from sources identified as emergency, use appropriately colored conductors with black and white tracer color for all conductors of the circuit.

3.4 CIRCUIT IDENTIFICATION:

A. Conductor Labeling: Tag or label conductors as follows:

1. Future: Identify conductors indicated to be for future connection or connection under another contract with identification indicating source and circuit number.
2. Switchboards, Panelboards, MCC's, Starters and Similar Equipment: Identify incoming feed circuit at lugs with write-on tag indicating point of origination, circuit number, phase, and voltage. Identify all distribution and branch circuit wires with write-on tags indicating circuit number, destination area or equipment, and load description; i.e., "A-13 / Room #14 / North wall plugs".
3. Junction and Wiring Boxes: Identify each wire passing through or terminating in junction or wiring boxes with write-on tag indicating panel and circuit #, voltage, and phase. Phase and voltage of branch circuit wiring may be indicated by means of coded color of conductor insulation. Three circuit, four-wire branch circuit home runs may be identified by a common tag.
4. Control Circuits: All control circuits shall be marked at each control panel termination point as to their function and where they terminate. Where control wires terminate into relays or enclosures or terminal cans remote from the main point of control the incoming wires shall be identified with write-on tags as to their function and where they originate. All associated wiring integral within a control cabinet shall be marked with the printed circular wire wrapping at each end corresponding to circuiting diagrams.

B. Raceway System Labeling: Label raceway system conduits and boxes as follows:

1. The interior of all junction and pull boxes shall be marked with permanent ink marker indicating the panel and circuit numbers of the wires passing through, originating, or terminating in the box. In attic spaces, the cover shall be marked with the same information.
2. The conduits and/or raceways entering and leaving boxes shall be marked with permanent ink marker to indicate respective points of origination and destination; i.e., "Panel A" / "Room 16".
3. All junction boxes in attic spaces terminating or serving as gathering points for emergency power or lighting circuits shall have the cover and first six (6) inches of entering and leaving conduits painted red.

END OF SECTION 26 21 00

SECTION 26 30 00 - SERVICE, DISTRIBUTION AND GROUNDING

PART 1 GENERAL

1.1 SCOPE:

- A. Work Included: Furnishing and installation of a complete electrical service, distribution, and grounding system. Conditions of this section apply to all other 26 00 00 series sections included.

1.2 QUALITY ASSURANCE:

- A. Codes and Regulations, Reference Standards: See Section 26 10 00.

1.3 SUBMITTALS:

- A. Product Data: Submit manufacturer's data on service entrance equipment switchboards, motor control centers and/or individual starters, transformers, panelboards, disconnect switches and grounding components.
- B. Trip Curves: Submit trip timing curves for all circuit interrupting devices.
- C. Nameplate Schedule: Submit nameplate schedule for approval.

1.4 COMPONENT COORDINATION:

- A. In order to maintain close control and coordinate the various components of the distribution systems, the number of manufacturers shall be kept to a minimum. Equipment manufacturer shall be General Electric, Eaton, or Square D. It shall be the manufacturer's responsibility through the Electrical Contractor to coordinate all components of the system in order to ensure systems that will provide maximum protection of equipment and reliable safe operation.

1.5 NAMEPLATES:

- A. General: Engraved plastic-laminated, color coded red for 277/480 volt equipment, black for 120/208 volt equipment, with white letters. Provide for identification of each piece of electrical equipment, switchboards, transformers, panelboards, disconnects, and enclosed breakers. A schedule of nameplates shall be included with the shop drawings for approval. Nameplates shall be secured with permanent adhesive and two (2) stainless steel self-tapping screws.
- B. Each piece of electrical equipment shall be provided with a 2" x 3-1/2" nameplate on the front of the door or on the trim, indicating designation, voltage, and distribution panel and circuit feeding the panel.
- C. Switchboards, distribution panelboards, and all starters and disconnects shall have sub feeders and main breakers marked with 1" x 3" nameplates indicating load served.
- D. All weatherproof disconnects shall be marked with 1" x 3" nameplates indicating voltage and the panelboard or switchboard from which it is fed from.
- E. Provide identification for emergency system boxes and enclosures by labeling the boxes and enclosures and painting the conduits entering with red paint at a length of six (6) inches.

1.6 FEEDER CONNECTIONS:

- A. Provide cast saddle type bolted lugs, or hydraulically set compression lugs, for all bus connections. Manufacturer shall be Thomas and Betts, Burndy, O-Z Gedney or approved equivalent.

1.7 MISCELLANEOUS:

- A. Equipment Bases: Provide appropriately sized concrete housekeeping bases for all floor-mounted equipment.
- B. Hoisting Lifting Lugs: Provide on all heavy equipment as required to ensure safe hoisting.
- C. Space for Future Protective Device: Provide as indicated on drawings, shall be completely equipped for the future addition of a circuit breaker or fused switch, including all connections.
- D. Keys: All equipment enclosures shall be keyed alike.

PART 2 PRODUCTS

2.1 GROUNDING:

- A. Clamps, bonds, etc., suitable and as necessary to provide continuous ground system.
- B. Ground Rods: "Copperweld" 3/4" diameter, 10' long.
- C. All grounding conductors shall be copper, sizes not less than that required under CEC requirements.

2.2 MOLDED CASE CIRCUIT BREAKERS:

- A. General: Provide factory-assembled, molded case circuit breakers of frame sizes, characteristics, and ratings indicated. Circuit breakers shall be UL listed and meet NEMA Standards Publication AB1. Breakers covered under this specification may be applied in switchboards, panelboards, motor control centers, combination motor starters, and individual enclosures. Circuit breakers shall be manufactured by General Electric, Eaton, or Square D.
- B. Construction: Construct with overcenter, trip-free, toggle-type operating mechanisms with quick-make, quick-break action and positive handle trip indication. Construct breakers for reverse connection capability, mounting and operating in any physical position, and operating in an ambient temperature of 40°C. Two and three-pole breakers shall be common trip. Provide breakers with mechanical screw type removable connector lugs, AL/CU rated.
- C. Operation: Automatic operation of the circuit breaker shall be obtained by means of thermal and magnetic tripping devices located in each pole of the breaker. The thermal device shall provide time-delay tripping on overloads, and the magnetic device shall provide instantaneous tripping on short circuits. The instantaneous magnetic trip shall be adjustable and accessible from the front of the breaker on frame sizes above 100 amperes.
- D. Lighting and Appliance Panelboard Breakers: Bolt on construction, Square D QOB, General Electric, or Eaton equivalent.
 - 1. All single pole 15 and 20 amps shall be UL listed as "Switching Breakers" and carry the SWD marking.
 - 2. Breakers indicated as "GFI" (Ground Fault Interruptive) shall provide UL Class AC 5-milliampere sensitivity ground fault protection integral within the breaker. Single pole GFI breakers shall take no more panel space than a conventional breaker.

- E. Current Limiting Breakers: Provide breakers with current limiting capability as indicated or required to meet system short circuit requirements. Square D I-Limited, General Electric, or Eaton equivalent.
1. On high level fault currents, the circuit breaker shall limit peak current and let-thru energy and provide a voltage transient-free interruption at near unity power factor. On fault currents below the threshold of limitation, the circuit breaker shall provide conventional overload and short circuit protection.
 2. The unit shall not contain replaceable elements and the limiter automatically reset after circuit interruption.
- F. Series Connected Ratings: Where utilized to meet short circuit requirements, combinations for series interrupting ratings shall be recognized by Underwriters Laboratories and shall appear in the Recognized Component Directory under the "Circuit Breakers - Series Connected" product category DKS2. Current limiting circuit breakers shall allow the use of branch circuit breakers with lower interrupting capacities on systems capable of delivering fault currents up to 200,000 rms symmetrical amperes at 480V, ac and 100,000 rms symmetrical amperes at 600V, ac.
- G. Solid State Trip Breakers: Main and feeder breakers indicated "SS" shall be solid state trip type with ampere setting adjustment knobs for changing current carrying capability of units, and with ground-fault protection components with external neutral current transformer (CT). Construct with current carrying components isolated from the trip unit and field installed accessories, and with integral trip unit independent of any external power source. Square D ME/NE/PE/SE, GE or Eaton equivalent.
1. Provide with Long Time, Short Time, Instantaneous, and Ground Fault Pick up and delay (LSIG) unless indicated otherwise.
- H. Ground Fault Protection: All 1,000 amp or greater 480 volt and "GFI" indicated service breakers shall be furnished with ground fault protection. Protection may be provided by a zero sequence/shunt trip system or solid state breaker with integral GFI. System shall be complete with all required CTs, power supplies, etc., required.

2.3 PANELBOARDS:

- A. Power and Lighting Panelboards shall be Air Circuit Breaker bolted type, UL rated for 75°C. connections, with voltage, phase, breakers, and NEMA rating as specified in panelboard schedules. Panelboards shall be installed flush or surface as indicated. Panelboards shall be installed in code gauge rust proof steel cabinets with flush doors having flush lock(s), all keyed alike, and with trim cut square and true; NEMA 3R steel cabinets with gasketed doors having 3-point vault locks, all keyed alike, and two (2) spring loaded trunk catches.

120/208 Volt Panelboards: Square D type NQOD, Eaton or General Electric equivalent.

277/480 Volt Lighting Panelboards: Square D type NEHB, Eaton, or General Electric equivalent.

- B. Power Distribution Panelboards shall be Molded Case Circuit Breaker type, UL rated for 75°C connections, with voltage, phase, breakers, and NEMA rating as specified in panelboard schedules. Panelboards shall be installed flush or surface as indicated. Panelboards shall be installed in code gauge rust proof steel cabinets with flush doors having flush lock(s), all keyed alike, and with trim cut square and true; NEMA 3R steel cabinets with gasketed doors having 3-point vault locks, all keyed alike, and two (2) spring loaded trunk catches.

277/480 Volt Power Distribution Panelboards: Square D I-Line, Eaton or General Electric equivalent.

1. Spaces indicated on panelboard schedules are a minimum. Specifically sized spaces shall be provided. When schedules do not designate space frame size, the panelboard shall be supplied with spaces for one (1) three-pole breaker of the largest frame size which can be accommodated, and two (2) three-pole breakers of the next largest frame size which can be accommodated in the scheduled panelboard.
 2. All spaces shall include all required circuit breaker mounting hardware. Any breaker mounting area available after allotment to scheduled or required spaces shall be filled out with all required hardware to mount three-pole breakers up to 225 amp frame size.
- C. Short Circuit Rating: Panelboard and breakers shall have short circuit rating equal to or exceeding that indicated. Rating shall be for each panelboard as a complete integrated unit, tested in accordance with UL Standard UL 67. Panelboards shall be marked with their maximum short circuit current rating.
- D. All interiors shall be completely factory assembled. They shall be so designed that switching and protective devices can be replaced without disturbing adjacent units and without removing the main bus connectors, so that circuits may be changed without machining, drilling, or tapping.
- E. Branch circuits shall be arranged using double row construction except when narrow column panels are indicated. A nameplate shall be provided listing panel type and ratings.
- F. Unless otherwise noted, full size insulated neutral bars shall be included. Bus bar taps for panels with single pole branches shall be arranged for sequence phasing of the branch circuit devices. Neutral bussing shall have a suitable lug for each outgoing feeder requiring a neutral connection. A ground bus will be included in all panels.
- G. Boxes shall be at least 20" wide unless otherwise indicated and made from galvanized steel. Provide minimum gutter space in accordance with the California Electric Code. At least four (4) interior mounting studs with adjustable nuts shall be provided.
- H. Door hinges shall be concealed. All locks shall be flush, stainless steel, cylinder tumbler type locks with catches and spring loaded door pulls, keyed alike. Directory frame and card having a transparent cover shall be furnished with each door.
- I. All exterior and interior steel surfaces of the trim shall be properly cleaned, primed with a rust inhibiting phosphatized coating, and finished with a gray ANSI 61 paint. Trims for flush panels shall overlap the box for at least 3/4" all around. Surface trims shall have the same width and height as the box. Trims shall be mountable by a screwdriver without the need for special tools. After installation, trim clamps shall not be accessible when the panel door is closed and locked.
- J. All bus bars shall be copper, sized in accordance with UL standards to limit the temperature rise on any current carrying part to a maximum of 50°C above an ambient of 40°C maximum.

2.4 SWITCHBOARDS:

- A. Manufacturers: Subject to compliance with requirements, provide switchboards of one of the following:
- General Electric
Eaton
Square D
- B. General: Except as otherwise indicated, provide switchboards of types, sizes, characteristics, and ratings indicated, which comply with manufacturer's standard design, materials, components, and construction in accordance with published product information.

- C. Auxiliary Components: Where indicated or specified, auxiliary components such as transformers, meters, contactors, controllers, etc. shall be incorporated at the factory. Miscellaneous components such as current transformers, instrument transformers, etc. shall be included as required to form complete and functional systems, whether specifically specified or not.
- D. AC Dead-Front Distribution Switchboards: Provide factory assembled, dead-front, metal enclosed, self-supporting secondary power switchboards, of types, sizes and electrical ratings and characteristics indicated; consisting of panel (vertical) units, and containing circuit breakers of quantities, ratings and types indicated. Provide copper main bus and connections to switching devices of sufficient capacity to limit rated continuous operating temperature rise to 54°F and 90°F for circuit breaker branches; with main bus and tap connections silver-surfaced and tightly bolted for maximum conductivity. Brace bus for short circuit stresses up to maximum interrupting capacity. Prime and paint switchboard with manufacturer's finish and color.
- E. Enclosures: Construct dead-front switchboards, suitable for floor mounting, with front cable/wire and conduit accessibility. Provide welded steel channel framework, hinge wireway front covers to permit ready access to branch circuit breaker load side terminals. Coat enclosures with manufacturer's standard corrosive resistant finish. NEMA Type 3R construction, unless otherwise noted.
- F. Short Circuit Rating: Switchboards shall have integrated short circuit rating meeting the serving Utility Company available, 42,000 AIC minimum; or as indicated on plans.
- G. Service Switchboards: Switchboards to be utilized as service boards shall be constructed in accordance with serving Utility Company requirements; pull section, lugs, meter provisions, etc.
1. Provide with specific grounding provisions as indicated on plans.
- H. Spaces: All switchboards shall include all required circuit breaker mounting hardware for designated frame size. Any breaker mounting area available after allotment to scheduled or required spaces shall be filled out with all required hardware to mount three-pole breakers up to 225 amp frame size.

2.5 DISCONNECTS:

- A. Motor and circuit disconnects shall have an Underwriters' Laboratory label.
- B. Disconnect switches shall be suitable for area where they are installed, i.e., weatherproof, and shall be rated heavy duty. Use only 600 volt class with proper number of poles. Switches shall be fused unless indicated on plans. Fuses shall be dual element time delay UL Class RK5 or of type specified on plans. Weatherproof switches shall be in a NEMA 3R/12 enclosure.
- C. All fuses shall be of a type to coordinate with the equipment be protected; i.e. dual element fuses for motors and HVAC compressor motors.
- D. When the disconnect is not clearly visible from the control location, provide it with an operating handle which is lockable in the open and closed positions.

2.6 AC COMBINATION STARTERS:

- A. General: Individual motor starters shall be circuit breaker combination magnetic starters unless noted otherwise. Units shall be housed with an enclosure for the area in which starter is installed. Starter size, voltage, and horsepower rating shall be determined by motor being served. All starters shall be rated 600 volt.

- B. Combination starter shall be manufactured in accordance with the latest NEMA Standards, sizes, and horsepower ratings, and shall be UL listed. Disconnect device and starter shall be mounted in one enclosure. Handle shall have provisions for padlocking in the "OFF" and "ON" positions with up to three padlocks.
- C. Starters: Shall be gravity dropout type with double break silver alloy contacts, molded coil, and melting alloy type overload relays. Thermal units shall be one-piece interchangeable. Provide with 2 N.O. and 2 N.C. contact, unless noted otherwise.
- D. Accessories: Provide starters with "Hand-Off-Auto" (HOA) selector switch - and red pilot light, mounted in cover; unless noted otherwise.
- E. Manufacturer: Combination starters shall be Square D Class 8539, General Electric, or Eaton equivalent.

PART 3 EXECUTION

3.1 INSTALLATION OF GROUNDING:

- A. Scope: Provide grounding system complying with the codes and ordinances specified. Grounding system shall provide continuity through the entire electrical system including:
 - 1. Panelboard ground buses.
 - 2. All conduit or other raceways.
 - 3. All motors.
 - 4. All lighting fixtures.
 - 5. Grounding terminals of all receptacles.
 - 6. Miscellaneous grounds required by code.
- B. Equipment and raceway bonding procedures shall be rigidly maintained and meet all jurisdictional requirements of codes and regulations.
- C. Grounding conductors shall be terminated using a bolted crimped lug connection.
- D. Good, electrically continuous, metal to metal contacts shall be made wherever possible at all panel boxes, pull boxes, etc. Where it is not possible to obtain good contacts, the conduit shall be bonded around the boxes with a #6 B&S gauge, rubber covered, double braided wire with ground clamps.
- E. A separate grounding conductor shall be run in all conduit runs from distribution, lighting, and power, etc., panelboards, motor control outlets, etc., back to their respective service or distribution panelboards.
- F. Flexible Conduit Grounding: Provide a separate grounding conductor in all flexible conduit runs to include watertight flexible conduit with integral grounding straps. Install ground conductors inside conduit with ungrounded conductors. Extend from nearest panel to device being connected.
- G. A separate insulated (green colored) copper grounding conductor shall be run in all branch circuit conduits.
- H. Ground Rods: All new service installations shall be grounded in accordance to code requirements and per plans. Isolated transformers, including mini power zones, shall be grounded on the secondary to a ground rod.

1. Check resistance to ground at all locations (new services and transformers) and other grounded locations. If resistance exceeds 25 OHMS, install additional ground rods separated at least 6'-0" until resistance is reduced to 25 OHMS or less (CEC 250-84). Submit results to Engineer.

3.2 INSTALLATION OF PANELBOARDS:

- A. Provide mounting brackets, busbar drillings, and filler pieces for unused spaces.
- B. Branch circuits shall be connected as shown in line diagrams and/or panelboard schedules, with wires neatly tie wrapped in panel.
- C. Branch circuit panelboards shall have a plastic covered circuit directory card on the inside of each door complete with all circuit destinations neatly typed. Provide also project name and date of installation on card.
- D. The Electrical Contractor shall check and tighten all factory made wire or lug connections. Tighten connectors and terminals, including screws and bolts, in accordance with equipment manufacturers published torque tightening values for equipment connectors. Where manufacturer's torquing requirements are not indicated, tighten connectors and terminals to comply with tightening torques specified in UL Standard 486A.
- E. Install four (4) spare 3/4" conduits from all panelboards to accessible ceiling space.

3.3 INSTALLATION OF SWITCHBOARDS:

- A. Install switchboards as indicated, in accordance with manufacturer's written instruction, and with recognized industry practices to ensure that switchboards comply with requirements of NEMA and CEC standards, and applicable portions of NECA's "Standard of Installation."
- B. Prior to energization of circuitry, check all accessible connections to manufacturer's torque specifications. Subsequent to wire and cable hook-ups, energize switchboards and demonstrate functioning in accordance with requirements.
- C. Testing: All G.F.I. breakers shall be tested and shown to comply with CEC Section 230-95 in accordance with International Electrical Testing Association, Inc. (NETA) standards by a NETA certified independent testing company.
- D. Switchboards shall have a plastic covered circuit directory card on the inside of each door with all circuit destinations neatly typed. Provide also project name and date of installation.

3.4 INSTALLATION OF DISCONNECTS:

- A. Install disconnects for all equipment and motors of the size required and as recommended by manufacturer.
- B. Fuses installed for all mechanical furnished equipment shall be sized and coordinated with Mechanical Contractor for specific motor or equipment requirements.

3.5 INSTALLATION OF MOTOR STARTERS:

- A. In finished areas, mount motor protection switches flush and install suitable cover plates.
- B. Install heaters correlated with full load current of motors provided.
- C. Set overload devices to suit motors provided.

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

SERVICE, DISTRIBUTION AND GROUNDING
SECTION 26 30 00 - 8

END OF SECTION 26 30 00

SECTION 26 30 20 - PAD MOUNT TRANSFORMERS

PART 1 GENERAL

1.1 SCOPE:

Furnish and install pad mounted style, oil filled transformers on concrete pad as indicated on drawings and as specified.

1.2 SUBMITTALS:

- A. Product Data: Submit manufacturer's technical product data including rated KVA, frequency, primary and secondary voltages, percent taps, polarity, impedance and certifications of transformer performance efficiency at indicated loads, percentage regulation at 100% and 80% power factor, no-load and full-load losses in watts, % impedance at 50°C, hot-spot and average temperature rise above 40°C ambient, sound level in decibels, and production line test reports in accordance with ANSI C 57.12.
- B. Shop Drawings: Submit manufacturer's drawings indicating dimensions and weight loadings for transformer installations showing layout, mountings and supports, spatial relationship to associated equipment, panelboards, and transformer connection to electrical equipment.

PART 2 PRODUCTS

2.1 MANUFACTURER:

Subject to compliance with the requirements, provide transformer of one of the following:

Eaton/Cooper Electric
General Electric Company
Square D

2.2 POWER/DISTRIBUTION TRANSFORMERS:

- A. General: Except as otherwise indicated, provide manufacturer's standard materials and components as indicated by published product information, designed and constructed as recommended by manufacturer, and as required for complete installation.
- B. Distribution Pad mount Compartmental-Type Transformer: The unit shall contain the transformer, oil fused cutouts, and separate compartments in a weather resistant, tamper resistant enclosure, arranged for padlocking. Transformer shall conform to ANSI C57.12.26. High voltage and low voltage compartments shall be isolated from each other in a manner to require a separate unlatching or unbolting action to give access to the high voltage compartment.
- C. Transformer: Dead-Front, three phase, two winding, 60 Hz, 55/65°C. rise, (oil insulated) self-cooled type, KVA capacity rating per plans. The high voltage shall be 12KV as designated on plans. Basic Impulse Level shall be 96 kV. Low voltage shall be 480/277, 208/120 or as designated on plans. Impedance shall be manufacturer's standard. Transformer tank shall be sealed except for bolted handhole access. Provide lifting lugs. Provide with two 2-1/2 FCAN and two 2-1/2 FCBN taps with external tap changing for de-energization operation only. Locate the changer control handle within the high voltage compartment and provide position indicator and method of securing the control handle against unintentional operation.
- D. Tank Construction: Liquid immersed transformer shall have a sealed tank with a welded on cover.

E. Mineral Oil: ASTM D 3487, Type II tested in accordance with ASTM D 117.

F. Transformer Accessories:

1. Drain and sampling plug
2. Ground Pads
3. Provisions for lifting and jacking
4. Top liquid dial-type thermometer without alarm contacts
5. Pressure-vacuum gauge
6. Pressure-relief valve.

G. Oil Immersed Fuses: Provide Bay-O-Net type oil immersed fuses to be externally replaceable with distribution hot stick without opening the transformer tank.

H. Undercoating: Transformer and compartment bottoms shall be undercoated with a minimum 5 mil thick coal tar epoxy rust preventative coating.

I. Enclosure:

1. Enclosure shall be a minimum 12 gauge steel and shall be completely lockable, tamperproof, and weatherproof. The entire enclosure shall be degreased, primed, and finished with baked enamel.
2. The enclosure is to be provided with lifting devices and jacking pads at each corner. These are to be so designed that they can be removed after installation to render a clean appearance.
3. Appropriate OSHA approved porcelain high voltage warning signs are to be placed on the high voltage section and on outside of the transformer.

2.2 TRANSFORMER PAD:

- A. Provide concrete slab foundation 8" thick, reinforced by 6" x 6" number 6 mesh placed uniformly located 4" below the top of the slab. Slab shall be placed on a well compacted gravel subbase so that the top is 4" above grade. All edges shall have a 1/2" chamfer. Pad dimensions shall allow at least 8" of free space on all sides of equipment. Cable entrance space and locations shall be as required by the equipment to be mounted.
- B. Concrete for Electrical Requirements: 3000 psi concrete with 1" maximum aggregate conforming to requirements of the Concrete Section of the specifications.

PART 3 EXECUTION

3.1 INSTALLATION OF TRANSFORMERS:

- A. Install transformers as indicated, complying with manufacturer's written instructions, applicable requirements of CEC, NEMA, ANSI, and IEEE standards, and in accordance with recognized industry practices to ensure that products fulfill requirements
- B. Connect transformer units to electrical wiring systems; comply with requirements of other Division 26 sections.

3.2 GROUNDING:

Provide equipment grounding connections, sufficiently tight to assure permanent and effective ground, for transformers as indicated.

3.3 TESTING:

Upon completion of installation of transformers, energize primary circuit at rated voltage and frequency from normal power source and test transformers, including, but not limited to, audible sound levels, to demonstrate capability and compliance with requirements. Where possible, correct malfunctioning units at the site, then retest to demonstrate compliance; otherwise, remove and replace with new units and proceed with retesting.

END OF SECTION 26 30 20

SECTION 26 31 00 - DRY TYPE TRANSFORMERS

PART 1 GENERAL

1.1 SCOPE:

Furnish and install floor, shelf, or wall mounted style, dry type transformer as indicated on drawings and as specified. All dry type transformers shall comply to 2016 energy efficiency standards for transformers.

1.2 SUBMITTALS:

- A. Product Data: Submit manufacturer's technical product data including rated KVA, frequency, primary and secondary voltages, percent taps, polarity, and impedance.
- B. Shop Drawings: Submit manufacturer's drawings indicating dimensions, and weight loadings for transformer installations, showing layout, mountings and supports, spatial relationship to associated equipment and panelboards, and transformer connection to electrical equipment.

PART 2 PRODUCTS

2.1 MANUFACTURER:

Subject to compliance with the requirements, provide transformer of one of the following:

Square D
General Electric
Eaton

2.2 POWER/DISTRIBUTION TRANSFORMERS:

- A. General: Except as otherwise indicated, provide manufacturer's standard materials and components as indicated by published product information, designed and constructed as recommended by manufacturer and as required for complete installation.
- B. Transformer: Dead front, single phase or three phase, two winding, 60 Hz., 150°C. rise, self-cooled type, KVA capacity as shown on plans. Primary shall be 480 volts delta and secondary shall be 208/120 volts wye for three phase transformers and 480 volts delta primary and 240/120 volts delta secondary for single phase transformers, or as otherwise noted on plans. Impedance shall be manufacturer's standard. The maximum temperature of the top of the enclosure shall not exceed 35°C rise above a 40°C ambient. All insulating materials used to be in accordance with NEMA ST20 or NEMA TR27 standards for a 220°C. insulating system. The core of the transformer shall be visibly grounded to the enclosure by means of a flexible grounding conductor sized in accordance with applicable NEMA, IEEE, and ANSI standards.
- C. Enclosure: Transformers 25 KVA and larger shall be in a heavy gauge, sheet steel, ventilated enclosure. Provide wire fabric rodent guard over ventilated openings and designed to prevent accidental access to live parts in accordance with UL, NEMA, and California Electric Code standards for ventilated enclosures. Transformers 25 KVA through 75 KVA shall be designed so they can be either floor or wall mounted. Above 75 KVA they shall be floor mounted.
- D. Sound: Sound levels shall be guaranteed by the manufacturer not to exceed the following:
 - 15 - 50 KVA 45 dB
 - 51 - 150 KVA 50 dB
 - 151 - 300 KVA 55 dB

301 - 500 KVA 60 dB

PART 3 EXECUTION

3.1 INSTALLATION OF TRANSFORMERS:

- A. Install transformers as indicated, complying with manufacturer's written instructions, applicable requirements of CEC, NEMA, ANSI, and IEEE standards, and in accordance with recognized industry practices to ensure that products fulfill requirements.
- B. Floor and roof mounted transformers shall be mounted on captive steel insert neoprene mountings, Vibrex Model F.U. vibration isolators, seismic rated or equivalent. Conduit entering transformers shall be isolated from case with oversize hole, ground wire, and rubber grommet.

3.2 GROUNDING:

Provide equipment grounding connections, sufficiently tight to assure permanent and effective ground, for transformers as indicated.

3.3 TESTING:

Upon completion of installation of transformers, energize primary circuit at rated voltage and frequency from normal power source and test transformers, including, but not limited to, audible sound levels, to demonstrate capability and compliance with requirements. Where possible, correct malfunctioning units at the site, then retest to demonstrate compliance; otherwise, remove and replace with new units and proceed with retesting.

END OF SECTION 26 31 00

SECTION 26 32 00 - MOTOR CONTROL CENTERS AND CONTROLS

PART 1 GENERAL

1.1 SCOPE:

Furnish and install the motor control center consisting of one or more enclosed vertical sections joined together to form a rigid, free standing assembly as indicated on the Drawings and as specified.

1.2 QUALITY ASSURANCE:

- A. Codes and Standards: Comply with requirements set forth by Underwriters Laboratories publication, UL-845, NEMA publication No. ICS-2, the National Electric Code, and other applicable codes.

1.3 SUBMITTALS:

- A. General: Voltage, phase, frequency, horizontal and vertical bus capacity, short-circuit ratings branch circuit-breaker ratings, types of motor starting types of wiring, panel boards, and transformers.
- B. Shop Drawings: Submit layout drawings of motor control centers (MCC) showing accurately sealed basic equipment sections including, but not limited to, motor starters, controllers, device panels, and circuit breakers. Show spatial relationships of MCC components to proximate electrical equipment. Clearly differentiate on wiring diagrams those conductors which are factory-installed and those which are field-installed. Show all areas for conduit and wire entrances.
- C. Maintenance Data: Submit maintenance data and parts list for all electrical equipment supplied, including "trouble-shooting" maintenance guide.

1.4 MANUFACTURER:

Subject to compliance with requirements, provide motor control centers of one of the following: Square D, General Electric, Furnas, Allen Bradley, Eaton, or an approved equal.

PART 2 - MATERIALS

2.1 MOTOR CONTROL CENTERS AND COMPONENTS:

- A. General: Provide motor control centers and ancillary components of sizes, ratings, classes, types, and characteristics indicated; which comply with manufacturer's standard design, materials, components, and construction in accordance with published product information, as required for complete installation, and as specified herein.
- B. Motor Control Centers: Provide motor control centers for operation on 480 VAC, 3-phase, 4-wire, or as shown the Drawings, 60 Hz grounded service, or otherwise indicated on the Drawings, consisting of one or more vertical sections, each with components and spaces as indicated on the Drawings. Design MCC for connection to available faults of not less than that of main service panel. Provide MCC with NEMA Class 2, Type B wiring.
- C. Structures: Provide factory-assembled, deadfront, with enclosed vertical sections, as indicated on the Drawings, fastened together to form rigid free-standing assembly. Unit shall be able to house the horizontal and vertical busses, motor starters, panelboards, circuit breakers, control and distribution transformers and other components and shall be designed to allow for easy

rearrangement of components by the purchaser. Construct units NEMA type 3R enclosure for exterior service and NEMA 1G for indoor applications. All units to be UL labeled.

- D. Bus System: Construct bus bars of tin-plated copper, braced to withstand fault equal to main service panel; provide main horizontal bus with rating of per drawings, and vertical bus rating of 300 amperes; and construct vertical bus bars with protective barriers to prevent accidental contact of personnel with bus. Provide tin-plated copper ground bus running full width of MCC at bottom of lineup.
- E. Starter Units: Starter units based on DIN or IEC standards are not acceptable. Starter units utilizing electronic circuitry to reduce the physical area of the main contacts are not acceptable. Provide magnetic motor starters with circuit breaker type disconnects and auxiliary control devices as indicated on the Drawings. Motors 50 HP and over or per drawings will be provided with reduced voltage starting. Enclose and isolate each unit from adjacent units. Design units so that faults will be contained within compartments; and with stated rms symmetrical fault withstanding ability. Equip with thermal and magnetic overload protection device for each motor, indicating circuit breaker position switch, selector switch, two (2) auxiliary contacts (interchangeable NO to NC), and an individual control transformer. Also refer to the Drawings for added control devices to be included.
- F. Controls: Hand/Off/Auto control must start motors in hand position regardless of other system operations.
- G. Power Metering: Motor control centers shall include metering for voltage and amperage. Manufacturer to be Eaton IQ Data, Square D Powerlogic, Allen-Bradley Powermonitor, or Yokogawa 2350 Multifunction meter.
- H. Control Transformers:

A 480-120 V control transformer shall be supplied for each magnetic motor starter and lighting and heating controller, and shall be one standard size larger than is required for the motor space heater, control devices, and/or indicating lights shown on the Drawings.

Each control transformer shall have both primary legs fused, one secondary leg fused, and the other secondary leg grounded. Connections to both secondary legs shall be provided at the control terminal strip.
- I. Disconnect Operators: Provide external operator handles for switches and circuit breakers. Design handle with up-down motion and with down position indicating OFF. Construct handles which permit locking hand in ON and OFF position with three padlocks.
- J. Identification Operators: Provide equipment/system identification nameplates for each section complying with Section NAMEPLATES, and in accordance with Motor Control Schedule on the Drawings.
- K. Finishes: All exterior and interior surfaces shall be properly cleaned, and primed with a rust inhibiting prime coat. Provide two (2) finish coats of manufacturer's standard color baked-on enamel finish.

2.2 CONTROL STATIONS AND CONTROLS:

A. Control Stations:

Push buttons, selector switches, and pilot lights shall be heavy duty, oiltight/watertight devices installed in NEMA 4X enclosures, MCCs, and control panels. Lamp devices shall use LED style

lights. These devices shall be Allen-Bradley 800T/800H, Square D Company Class 9001, General Electric CR104, or equal.

Red	Alarms or trips
Green	Motor Running, valve open
Yellow	Pump Call
White	Control Power On

B. Control Relays:

1. 480V service control relays shall be industrial type, 600V, with 10A contacts and contact arrangement and operating coils of the proper voltage rating as required by the control circuit sequence and the Drawings. Each relay shall have a minimum of three reversible-pole contacts. The coils shall be sealed by pressure molding. The relays shall be Allen-Bradley 700-P, Square D Company Class 8501 Type X, Eaton D26 Type M or equal.
2. 120V and lower voltage miniature plug in type relays will have indicating pilot light to indicate relay is energized. The relays shall be Allen-Bradley 700-HF, Square D Company Class 8501 Type R, IDEC RR, Eaton D5 or equal.
3. Timers shall be SSAC TRU3, Allen Bradley 700HX or equal. Multifunction Onboard Selectable Modes of Operation: Delay on Make, Interval, Single Shot, Recycle, Delay on Break & Retriggerable Single Shot. Six Built-in Ranges from 0.1 Seconds to 1000 Minutes. Multi-voltage Operated From 19-264VAC and 19-30VDC automatically. 10 Ampere Output Contacts- DPDT 11 pin. Onboard LED's to indicate Input and Output Status.

C. Terminal Blocks: Intermediate terminations of panel wiring shall be done using modular screw-clamp terminal blocks, rated not less than 20 amperes at 600 V. White or other light-colored marking strips, fastened by snapping numbers into molded sections at each block, shall be provided for circuit designation. Each connected terminal of each block shall have the circuit designation or wire number imprinted on the marking strip with permanent marking fluid. Terminal blocks shall be Weidmuller SAK Series mounted on assembly rail TS 32, Phoenix Series UK mounted on Series NS assembly rail, or equal.

D. Thermostat: Thermostats shall have heavy-duty controls suitable for 120/240V operation. Contacts shall be hermetically sealed and mercury wetted. Units shall include integral thermometer. Enclosures shall be indoor type. Units shall be bellows actuated and shall have removable setpoint adjust knob. Unit shall have minimum adjustable temperature range of 40°F to 60°F and double-pole single-throw switch which opens on temperature rise. Units shall be Mercoid Model 860-54-62 or approved equal.

E. Limit Switches:

Limit switches mounted on panel doors for intrusion detection or light activation shall be proximity-type and shall be self contained, side or end sensitive as required. Sentrol 100 series or equal.

Mechanical sensing limit switches for valve position sensing shall be Square D Class 9007 Type C, Allen-Bradley 802T Series, or equal.

F. Pressure Switch: The Bourdon tube pressure switch shall be Mercoid Series DA operated by a brass Bourdon tube actuating a mercury switch. Switch shall have deadband adjustable up to a maximum of 100% of switch range. Switch shall have calibrated dial and two pointers indicating set and reset points. Switch shall have visible on/off indication. Set points shall be adjustable without removing switch cover or shutting down process. Pressure switch shall be UL listed and shall be Mercoid Series DA/DS, Model DA-31-153-7 or approved equal.

G. DC Power Supplies:

1. DC power supplies shall be supplied with proprietary equipment when part of a manufacturer's standard assembly or system.
2. Direct current supplies for bulk 24V nominal instrumentation power shall be convection-cooled switching type. Line regulation shall be 0.4 percent for line variations from 105 to 132 V, and load regulation shall be 0.4 percent for load variations from 0 to full load. Ripple and noise shall not exceed 100 mV peak-to-peak. Hold-up time at maximum load shall be not less than 16 milliseconds. Efficiency shall be better than 70 percent. Power supply shall be rated for continuous duty from 0 to 50°C at rated load. Connected load shall not exceed 50 percent of the rated load. Output shall be electronically current limited, and over voltage crowbar shutdown shall be provided. Power supplies shall be Acopian B series, Sola Silverline series, Power One International series, or equal.

PART 3 EXECUTION

3.1 INSTALLATION OF MOTOR CONTROL CENTERS:

- A. A complete functional test will be held at the shop of the panel fabricator with the MCC and all control components to verify correct functional operation. This test will be witnessed by the owner's representative and the engineer.
- B. Install motor control centers as indicated, in accordance with equipment manufacturer's written instruction, and with recognized industry practices, to ensure that motor control centers comply with requirements.
- C. Prior to energization of circuitry, check all accessible connections to meet manufacturer's torque specifications. Subsequent to wire and cable hook-ups, energize motor control center circuitry and demonstrate capability and compliance with requirements.

3.2 GROUNDING OF MOTOR CONTROL CENTERS:

Provide equipment grounding connections, sufficiently tight to assure permanent and effective ground, for motor control centers. All motor control centers will have a continuous ground bus through the entire width of the control center and any control cabinet attached to it. Where the motor control center is attached to a distribution panel or main service panel the continuous ground bus shall be tied to the bus in that equipment.

PART 4 MEASUREMENT AND PAYMENT

No separate payment will be made for Motor Control Centers. Payment for work in this section shall be included as part of the applicable Lump Sum or unit prices stated in other sections.

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

MOTOR CONTROL CENTERS AND CONTROLS
SECTION 26 32 00 - 5

END OF SECTION 26 32 00

SECTION 26 40 00 – FIXTURES - LED

PART 1 GENERAL

1.1 SCOPE:

- A. Provide lighting fixtures of sizes, types and ratings as indicated, complete with, but not necessarily limited to, housings, reflectors, drives, boards, wiring, and mounting hardware.
- B. The Electrical Contractor shall be responsible for lighting fixture counts.

1.2 DESIGNATION:

- A. Unless otherwise shown on the plans, lighting fixture type designation for an individual fixture shall be typical for similarly indicated fixtures within the entire room or defined area.
- B. Unless otherwise shown on the plans, lighting fixtures mounted in a continuous row shall be of the same type as any individual designated fixture within the row.
- C. In the event a lighting fixture is undesignated on plans, it shall be of the same type as lighting fixtures of similar function within rooms or areas.

1.3 COORDINATION:

- A. Confirm compatibility and interface of other materials with lighting fixtures and ceiling system. Report discrepancies to the Architect or Electrical Engineer, and defer ordering until clarified.
- B. Supply plaster frames, trim rings, and back boxes to other trades.
- C. Coordinate with Division 23 to avoid conflicts between lighting fixtures, supports, fittings, and mechanical equipment.
- D. All lighting fixtures shall be coordinated with the architectural reflected ceiling plan. If any discrepancies occur, the Architect or Electrical Engineer must be notified in writing before installation is started.

1.4 SUBMITTALS:

Make product submittals per Section 26 10 00, paragraph 1.7.

- A. Product Data: Submit complete list of fixtures along with manufacturer's catalog cuts and installation instructions on each type of lighting fixture and component. Include details indicating compatibility with ceiling grid system.
- B. Shop Drawings: Submit layout drawings of all non-standard or customized fixtures. Drawings shall include mounting and feed points and methods.
- C. Samples: Submit one complete operating unit for each type of light fixture shown on the fixture schedule. Upon project completion submitted fixtures become property of the Owner.

1.5 DELIVERY, STORAGE, AND HANDLING:

- A. Deliver interior lighting fixtures in factory-fabricated containers or wrappings, which properly protect fixtures from damage.

- B. Store interior lighting fixtures in original packaging. Store inside well-ventilated area protected from weather, moisture, soiling, extreme temperatures, humidity, laid flat and blocked off ground.
- C. Handle interior lighting fixtures carefully to prevent damage, breaking, and scoring of finishes. Do not install damaged units or components; replace with new.

1.6 SEQUENCING AND SCHEDULING:

- A. Coordinate with other work including wires/cables, electrical boxes and fittings, and raceways, to properly interface installation of interior lighting fixtures with other work.
- B. Sequence interior lighting installation with other work to minimize possibility of damage and soiling during remainder of construction.
- C. Order lighting fixtures in a timely manner to allow sufficient time for manufacture and delivery of long lead-time items. Make written notification with submittals of any delivery schedule problems. No substitutions will be allowed for late deliveries due to Electrical Contractor's lack of coordination.

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS:

The lighting fixtures described in the Light Fixture Schedule on the drawings are to be used as a standard of quality to be maintained. Substitute items of same function, performance, and appearance are acceptable in conformance with Section 26 10 00.

2.2 LIGHTING FIXTURES: General

- A. Provide lighting fixtures complete with all fittings, lamps, stems, hangers, and component parts to make a complete installation. Lighting fixtures shall have a suitable interior means of grounding the enclosure.
- B. All lighting fixtures shall bear the UL label and shall be suitable for installation location.
- C. All attaching devices for recessed or surface mounted fixtures mounted in the ceiling shall be of formed or rolled steel and of sufficient strength to prevent movement of fixture after installation.
- D. The Architect or Electrical Engineer shall have the right to reject any lighting fixture damaged due to improper packaging. Any lighting fixture with broken or cracked porcelain, broken or bent metal, broken lenses, or an appearance deemed not to be normal, may also be rejected by the Electrical Engineer at the expense of the Electrical Contractor.
- E. Trademarks or Monograms: There shall be no visible trademarks or monograms on the lighting fixtures.
- F. Recessed Lighting Fixture Trims: The Electrical Contractor shall use the following lighting fixture trim frame designs.
 - 1. Lay-in Frames: Lay-in frames for all exposed "T" ceiling systems in areas covered by Title 24.
 - 2. Flanged Trims: Flanged trims for plasterboard, spline or metal lathe and plaster ceiling systems. Provide plaster or mounting frames where required in areas covered by Title 24.

2.3 LED DRIVES:

- A. Drives shall be electronic type specifically designed to save energy while maintaining full light output. Drives shall have "A" sound rating, thermal protection and guaranteed against service failure for three (3) years. Drives shall comply with FCC and MEMA limits governing electromagnetic and Radio Frequency Interference and meet all applicable ANSI, State and Federal standards. The Electrical Contractor shall indicate the installation date on each drive by inscribing the month, day and year on the drive case. Drives shall be noiseless, high power factor type and shall be ETL certified under CBM standards and UL listed.
- B. LED diodes shall have the following minimum characteristics:
 - 1. Efficacy – 90 lumens or greater per watt.
 - 2. Color rendition index – 80 or greater
 - 3. Standard deviation color matching for diodes shall fall within 1 MacAdam ellipse.

2.4 EXTERIOR LIGHTING FIXTURES:

- A. Metal parts of exterior lighting fixtures exposed to weather conditions shall be constructed of cast or spun aluminum, cast bronze, stainless steel or other nonferrous metals available to withstand exposure.
- B. Steel lighting fixtures installed in damp or wet locations shall have zinc-chromate or equal primer.
- C. Provide gaskets on all trims and housings.
- D. Photo Controls: All exterior lighting fixtures not on a lighting control circuit shall be furnished with integral photoelectric cell.
- E. Standards: Light standards shall be as detailed on plans. Where painted standards are selected. Electrical Contractor shall provide two (2) gallons of matching paint to Owner for future touch up work.

2.5 WET LOCATIONS:

All lighting fixtures installed in wet or damp locations shall have UL approved "wet" or "damp" location labels visible in interior of fixtures.

PART 3 EXECUTION

3.1 INSTALLATION OF LIGHTING FIXTURES:

- A. Lighting fixture installation shall conform to all applicable standards for installation, mounting, wiring, and quality.
- B. All lighting fixtures shall be grounded and bonded in accordance with applicable codes. Where lighting fixtures are installed in rows, a #12 cu conductor shall be run continuously and a bonding screw shall be used to maintain bonding integrity from fixture to fixture.
- C. All lighting fixtures, lenses, and other trim shall be aligned, clean, free of paint and blemishes before final acceptance.
- D. Lighting fixtures weighing more than two pounds shall be supported by means other than the outlet box. All outlet boxes shall be able to support a minimum of eight pounds.

- E. For lighting fixtures weighing more than two pounds, support shall be provided at all four corners, plus the outlet box. Each support shall be able to carry a minimum of four times its intended load.
- F. No support or insert, except pendant canopies, shall be visible from the floor.
- G. Where lighting fixtures are pendant suspended, the use of ball aligner and canopies at ceiling and fixture, stem, and other required mounting devices shall be required for installation as required to meet Title 24 requirements. A safety cable anchored to the roof structure shall be installed in all pendants.
- H. When lighting fixtures are stem mounted, the variation in distance from the finished floor shall vary no more than 1/2" from the heights as specified on the plans.
- I. Mounting Heights: Pendant-Mounted lighting fixtures mounting heights shall be to the bottom of the fixture. Mounting heights of the wall-mounted lighting fixtures shall be to the center of the outlet box unless otherwise noted.
- J. Provide surface-mounted lighting fixtures with UL approval for direct mounting on the various ceilings, unless specified otherwise. Spacers will not be approved.
- K. Lighting Fixtures in Conflict with Ducts and Piping: Electrical Contractor shall coordinate the location of lighting fixtures to the available space left between the various ducts and piping. Any conflict or adverse situation shall be brought to the attention of the Architect or Electrical Engineer.
- L. All lighting fixtures shall be supported directly to building structural members or from bridging attached to the structural members, or shall have positive attached structural angles, and/or all-thread rod extensions from structure to ceiling plane. Lighting fixtures and supports shall be laterally braced independently from suspended ceilings (hard or T-bar) utilizing structural angles at approximate 45° angles in two planes from ceiling plane to structure above. Minimum rod size shall be 1/2" and minimum angle size shall be 3/4" x 3/4" x 3/16" unless noted otherwise in specific details. Provide all necessary blocking and hardware so that fixtures hang true, square, plumb, and in proper alignment.
- M. Recessed lighting fixtures in T-bar ceilings shall have #12 steel hanger wires from each fixture to roof structure, in accordance with State Code Requirements, and shall be attached positively to T-bar with locking T-bar clips or metal screws through T-bar into lighting fixture at opposite corners in accordance with State Code Requirements. The attachment device shall have a capacity of 100% of the fixture weight acting in any direction (CCR Title 24, Part 2, Section 2-4701, Paragraph Section 47.1813).
- N. Lighting fixtures surface mounted to T-bar ceilings shall be bolted through ceiling panel to metal channel struts suspended between ceiling main runners. Install hanger wires per above from struts to ceiling.
- O. Install flush mounted lighting fixtures properly to eliminate light leakage between fixture frame and finished surface.
- P. Provide plaster frames for recessed lighting fixtures installed in other than suspended grid type acoustical ceiling systems. Brace frames temporarily to prevent distortion during handling.
- Q. All drives shall operate within NEMA sound ratings. Noisy or otherwise defective drives shall be replaced.
- R. All fixtures shall be clean and operating at time of final inspection.

- S. Installation of Recessed Lighting Fixtures in Accessible-Type Suspended Ceilings: Shall be such that the fixtures will exactly suit the type of ceilings used without altering the fixture or the ceiling. Each lighting fixture shall be wired with a piece of flexible conduit sufficiently long to remove fixture enclosure from ceiling without disconnecting unit. Lighting fixture manufacturer shall prepare drawing or catalog sheets in which all details of fixture installation are carefully analyzed. Electrical Contractor to submit these shop drawings for approval. If clearance above "T" bar system is too restricted to "tip-in" lighting fixture, the Electrical Contractor shall coordinate with acoustic ceiling installer by leaving one cross "T" off until the cross "T" shall be secured into its proper place.
- T. Lighting Fixtures in 1-Hour Fire Rated Ceiling: Electrical Contractor shall provide gyp board "hats" above the fixtures to maintain the integrity of the 1-hour fire ceiling.

3.2 FIELD QUALITY CONTROL:

- A. Upon completion of installation of interior lighting fixtures, and after building circuitry has been energized, apply electrical energy to demonstrate capability and compliance with requirements. The Electrical Contractor shall replace at his expense all noisy ballasts, broken or cracked lenses or other defective items. Where possible, correct malfunctioning units at site, then retests to demonstrate compliance; otherwise, remove and replace with new units, and proceed with testing.
- B. At the time of substantial completion, replace drives and boards in interior lighting fixtures which are observed to be noticeably dimmed after Electrical Contractor's use and testing, as judged by the Architect or Electrical Engineer.
- C. Replace defective and burned out LED drives and boards for a period of five (5) years following the date of installation.

3.3 ADJUSTMENT AND CLEANING:

- A. Clean interior lighting fixtures of dirt and debris.
- B. Protect installed lighting fixtures from damage during remainder of construction period.

END OF SECTION

SECTION 26 43 00 - TRANSIENT VOLTAGE SURGE SUPPRESSION

PART 1 – GENERAL

1.1 SUMMARY:

- A. Transient voltage surge suppression shall be provided on all main services (Class C), all MCC's, and the secondary main bus of station step-down transformer. Minimum 240KA/PH rating for all 480 volt MCC's. TVSS installation to include fused or circuit breaker disconnect.

1.2 RELATED SECTIONS:

- A. Section 26 32 00 Motor Control Centers

1.3 SUBMITTALS:

- A. The Electrical Contractor shall furnish submittals for all products identified in this Section.

1.4 MANUFACTURER QUALIFICATIONS:

- A. The manufacturer of transient voltage surge suppression equipment must have engaged in the design and manufacture of similar equipment for a minimum of five (5) years.

PART 2 PRODUCTS

2.1 TRANSIENT VOLTAGE SURGE SUPPRESSION:

- A. Provide transient voltage surge suppressors suitable for the circuit voltage rating, service equipment, and connected loads.

2.2 SOURCE QUALITY CONTROL:

- A. The specified system shall be tested to meet ANSI/IEEE C62.41-1991, tested per ANSI/IEEE C62.45-1992.
- B. The system shall be tested to 1,000 sequential ANSI/IEEE C62.41 Category C waveforms.

2.3 MANUFACTURER:

- A. Manufacturer shall be Eaton SPD Max, Square D EMA or equal.

PART 3 EXECUTION

3.1 INSTALLATION:

- A. Transient voltage surge suppression equipment shall be installed in accordance with manufacturer's instructions and all applicable codes and standards.

END OF SECTION 26 43 00

SECTION 26 49 50 - HEAVY DUTY SAFETY SWITCHES

PART 1 – GENERAL

1.1 SUMMARY:

- A. This section includes equipment used for local disconnects at motors.

1.2 RELATED SECTIONS:

- A. Division 26 Electrical

1.3 REFERENCES:

- A. National Electrical Manufacturer's Association (NEMA)
- B. National Electrical Code
- C. American National Standards Institute (ANSI)
- D. Underwriter Laboratories (UL)

1.4 SUBMITTALS:

The Electrical Contractor shall furnish submittals for all products identified in this Section.

PART 2 PRODUCT DESCRIPTION

- A. Switches to be Heavy Duty Safety switches, 600 volt, single throw, 3 pole, fusible.
- B. Enclosure to be rated NEMA 4 dust tight, watertight, and corrosion resistant with lockable access door. All current carrying parts to be copper.
- C. Switch to be rated full load break.
- D. Short circuit withstand rating to be 200,000 RMS symmetrical amperes.
- E. Switch to be equipped with a cover viewing window showing the position of the stabs.

PART 3 EXECUTION

3.1 INSTALLATION:

- A. All safety switches shall be installed and calibrated in accordance with manufacturer's instructions.

END OF SECTION 26 49 50

SECTION 26 49 60 - MANUAL TRANSFER SWITCHES

PART 1 GENERAL

1.1 SUMMARY

- A. This section includes equipment used for manual transfer switches for emergency generators. Manual transfer switch to be compatible with Fresno County portable generator electrical rating and cable/connectors.

1.2 RELATED SECTIONS

- A. Division 26 Electrical

1.3 REFERENCES

- A. National Electrical Manufacturer's Association (NEMA) KS1
- B. National Electrical Code Article 702
- C. American National Standards Institute (ANSI)
- D. Underwriter Laboratories(UL) 98

1.4 SUBMITTALS

- A. Contractor shall furnish submittals for all products identified in this Section.

PART 2 PRODUCT DESCRIPTION

- 2.1 Switches to be manual transfer switches, 600 volt rated, double throw, 3 pole, no-fusible. Padlockable On or Off. UL listed for use as service equipment.
- 2.2 Enclosure to be rated NEMA 1G dust tight for indoor applications, NEMA 3R water tight, and corrosion resistant for outdoor both with lockable access door. All current carrying parts to be copper.
- 2.3 Switch to be rated full load break.
- 2.4 Short circuit with stand rating to be 65,000 AIC class. Actual per corresponding equipment components.

PART 3 EXECUTION

3.1 INSTALLATION

- A. All manual transfer switches shall be installed and calibrated in accordance with manufacturer's instructions.

END OF SECTION 26 49 60

SECTION 26 50 00 - EQUIPMENT CONNECTIONS

PART 1 GENERAL

1.1 SCOPE:

- A. Make all connections of power to all equipment along with installation of required disconnecting means.
- B. Furnish all electrical disconnects, power supplies, and controls as noted within the electrical plans for equipment, compressors, fans, etc.

PART 2 PRODUCTS

2.1 MATERIALS:

Conduits, boxes, cover plates, disconnects, etc., per applicable related sections.

PART 3 EXECUTION

3.1 INSTALLATION OF MECHANICAL EQUIPMENT WIRING:

- A. Furnish all electrical disconnects, power supplies, and controls as noted within the Division 23 and Division 26 plans for Division 23 equipment as shown on the mechanical plans.
- B. Make all connections of power to all mechanical equipment along with installation of required disconnection means. The work is generally as noted, but not specifically limited to the following:
 - 1. Air-cooled chillers
 - 2. Pumps
 - 3. Air conditioning units
 - 4. Exhaust fans
 - 5. Fan coils
 - 6. Temperature control panels
 - 7. Boilers
 - 8. Air compressors and air dryers
 - 9. Air handlers
- C. Supply all electrical junction boxes for mechanical equipment.

3.2 INSTALLATION OF OWNER-FURNISHED EQUIPMENT WIRING:

- A. Make all connections of power to all Owner-furnished equipment along with installation of required disconnection means. The work is generally as noted, and also as shown on the architectural plans, but not specifically limited to the those.
- B. Supply all electrical junction boxes for Owner-furnished equipment.

3.3 MOTOR CONNECTIONS:

- A. The Electrical Contractor shall make all line connections for each motor sized as shown on the plans. Electrical Contractor shall be responsible for proper phasing and rotation of all connected motors.
- B. The Electrical Contractor shall supply those starters indicated on the plans, install these and Mechanical furnished starters, and make motor-starter connections for all indicated motors.

- C. The Electrical Contractor shall verify motor characteristics prior to installing wiring. Exact location of motor and motor connections shall be ascertained prior to installing conduits.
- D. A Liquidtight Flexible Metal (LFMC) conduit connection, in lengths not to exceed 36", shall be provided at each motor. Lengths exceeding 36" are to be submitted to the Engineer for approval.

3.4 TESTING:

After all wiring to each unit is complete, the Electrical Contractor shall cooperate with Mechanical or Equipment Contractors in testing equipment for proper operation and shall correct wiring as required for proper operation.

END OF SECTION 26 50 00

SECTION 26 92 40 - AC VARIABLE FREQUENCY DRIVES WITH LINE AND LOAD
REACTORS/FILTERS

PART 1 GENERAL

1.1 SCOPE

- A. This section provides specification requirements for inverter type adjustable frequency variable speed heavy duty drives or herein identified as VFD drives for use with standard inverter duty NEMA AC motors.
- B. The Electrical Contractor shall furnish, test, install and place into satisfactory operation all AC drives, with spare parts as specified.
- C. The manufacturer shall have a nationwide field service and technical support organization available 24 hours a day from an 800 telephone number. Capabilities shall include factory coordinated start-up service and on-site training of customer personnel. Replacement drives shall be stocked in a location within a 24-hour delivery time to the job site.

1.2 RELATED SECTIONS

- A. Section 26 32 00 Motor Control Center

1.3 SUBMITTALS

- A. Product Data: Submit manufacturer's technical product data to include, but not limited to, the following: voltage, phase, amperage ratings, and short-circuit withstand rating.
- B. Shop Drawings: Submit layout drawings providing overall dimensions, mounting requirements, and location of field wiring terminations.
- C. Maintenance Data: Submit maintenance data including "trouble-shooting" maintenance guide and parts list.

1.4 MANUFACTURER'S EXPERIENCE

- A. The manufacturer shall have been specialized in the production of this type of equipment for a period of at least five (5) years. The AC drive(s), programmable logic controllers and other electrical gear herein specified, shall be supplied and manufactured by the AC drive manufacturer who shall coordinate and verify their operation.

1.5 QUALITY ASSURANCE

- A. Every VFD drive unit shall be designed, constructed and tested in accordance with NEMA, UL, NEC and IEEE recommendations. Every VFD drive and all supplied options shall be UL approved and listed according to UL 508. The controller shall have a UL listed label attached inside the enclosure as verification. The VFD will be NEMA rated and labeled for the horsepower served.
- B. The VFD type drive shall be tested with an actual motor load and temperature cycled within an environmental chamber at 122°F (50°C). The frequency output and voltage will be varied throughout the test. Documentation shall be furnished to verify successful completion at the request of the Engineer.

PART 2 PRODUCTS

2.1 MANUFACTURER

- A. Variable speed drives will be Allen Bradley, Cutler Hammer, or Square D. No others are acceptable unless approved by owner.

2.2 DESIGN

- A. The VFD drive shall convert the input VFD main power to an adjustable frequency and voltage. The output frequency and voltage of the VFD drive shall be adjustable to maintain a constant V/Hz ratio throughout the operating range. The VFD drive shall be designed to operate from 460v, three phase, 60 Hz main supply that is within +10%, -10% of nominal line voltage.
- B. Designs that incorporate silicon controlled rectifiers (SCRs) will not be allowed. The DC bus voltage shall be filtered. The rectifier shall be insensitive to the phase rotation of the AC line and shall not cause a displacement power factor of less than .95 lagging under any speed or load condition.
- C. The inverter shall change fixed DC voltage to variable frequency VFD for application to a standard inverter duty NEMA motor. Paralleling of inverter power devices to increase current rating is not acceptable.
- D. Alternate adjustable frequency control drive techniques other than pulse width modulated (PWM) technology will not be considered for motors of 500 horsepower and less.
- E. The VFD drive shall be capable of operating into an open circuit without damage in order to facilitate start-up/maintenance.

2.3 MOTOR DATA

- A. The VFD drive shall be designed to operate a standard inverter duty NEMA electrical motor with a nameplate rating of 460v, three phase power, full load amps as supplied, at 100% load factor.
 - 1. Motors shall be designed for operation with variable frequency drives. The motor will meet NEMA standard MG1-1993, Part 31.40.4.2. This standard states that the motor should be designed for a peak voltage of 1600 volts at a minimal rise time of 0.1 microseconds for motors rated less than 600 volts.

2.4 RATINGS

- A. The VFD drive shall be capable of supplying 150% of rated full load current for one minute at maximum ambient temperature. The VFD drive unit and not just the fuses shall be rated for installation in a power system capable of delivering up to 65,000 RMS symmetrical amperes.
- B. The VFD drive shall be capable of operating within -10% to +10% of nominal input voltage rating. The minimum displacement power factor shall be 0.95 throughout the entire speed range. The VFD drive shall be capable of operating without damage with the motor disconnected.
- C. The VFD drive efficiency shall be 97% or greater at full speed.

- D. The drive shall be rated to operate at 50°C ambient air temperature. The drive enclosure will be cooled by redundant cooling fans to ensure the air at the drive electronics does not exceed the 50°C rating with an ambient air temperature of 45°C. Drive mounting shall have the heat sink externally mounted from the electronics enclosure with dedicated cooling fans for the heat sink. The drive shall have a high temperature shutdown to turn off drive when maximum operating temperature is reached. Maximum temperature is the highest temperature the drive can run at without component degradation or failure.
- E. The drive will be rated to withstand vibration levels of .006 inches displacement with 1G peak intensity. The drive will be rated to withstand shock of 15G peak for 11 MS duration.
- F. The input drive frequency tolerance shall be from 48 to 62 hertz.

2.5 ADJUSTMENTS

- A. Programmable operating parameters shall be available for all functions through a local programming and display panel.
- B. A communication interface shall be provided for a PLC Ethernet Protocol.

2.6 PROTECTION

- A. An adjustable instantaneous over current trip of 220 to 300% of rated output current shall be available
- B. Subjecting the controller to any of the following conditions shall activate electronic protective circuits and eliminate component failure or the need for fuse replacement:
 - 1. Short circuit at VFD drive output
 - 2. Ground fault at VFD drive output
 - 3. Open circuit at VFD drive output
 - 4. AC input under voltage and over voltage
 - 5. DC bus over voltage and under voltage
 - 6. Power ride-thru of 15 milliseconds minimum
 - 7. AC line switching transients up to 6000 volts peak per IEEE C62.41-1991
 - 8. Instantaneous current limit
 - 9. Drive over current trip
 - 10. Over temperature/Heat sink thermistor
 - 11. Logic control ride-thru .5 seconds minimum

2.7 CONTROL OPTIONS

- A. All operator control options shall be mounted to the front panel, which is integral to the VFD drive. The VFD drive will automatically restart in either Hand or Automatic without the operator giving a manual start command. Supply with VFD:
 - 1. Manual speed adjustment.
 - 2. Hand-Off-Auto (HOA) switch.
 - 3. The controller shall accept a 4-20 ma input signal from the PLC as an automatic speed reference signal when the controller is in the automatic mode of operation. The manual speed potentiometer will control the VFD drive frequency when the switch is in manual mode.

2.8 OPERATION FEATURES

- A. The VFD drive shall have the option of manual or automatic reset after faults.
- B. The VFD drive shall be capable of restarting into a motor coasting in either forward or reverse direction without component failure or tripping off line. The VFD drive shall include static reversing which shall change the output phase rotation to reverse the motor rotation.
- C. A slip compensation circuit for loads shall be included which will sense changing motor load conditions and adjust output frequency to provide speed regulation of standard NEMA motors within $\pm 0.5\%$ of maximum speed without tachometer feedback.
- D. The VFD drive shall include external fault reset capability. All the necessary logic to accept an external fault reset contact shall be included.

2.9 PILOT DEVICES

- A. All operator control options will be mounted to the dead front panel of the drive enclosure cabinet.

Front panel pilot lamps.

- 1. Power On Light.
- 2. Drive Run Power Light.
- 3. Drive Fault Pilot Light.

- B. Meters.

- 1. Digital speed meter with selectable ranges from (% of speed, rpm or Hz).
- 2. Digital output ammeter calibrated 0-150% of current.

2.10 CONTROL REQUIREMENTS

- A. Isolated follower with set point control 4-20ma dc with PI control from isolated ground signal or alternately a communication interface for control
- B. Relays
 - 1. A start relay shall allow the drive to be remotely started via a 120v ac input.
 - 2. A drive run relay shall provide a dry contact closure for remote monitoring.
 - 3. A drive fail relay shall provide a dry contact closure for remote monitoring.

2.11 HARMONIC ANALYSIS AND POWER CONDITIONING

- A. Line reactors designed to limit harmonic distortion to less than IEE 519 requirements (5)% shall be provided, installed, and connected.
- B. If motor cable length exceeds 40 feet a load side reactor/filter will be included in the installation. This is to prevent voltage reflection and limit voltage spikes to less than cable and motor voltage ratings.

PART 3 EXECUTION

3.1 STARTUP

The services of a qualified technician shall supervise the installation, testing, and start-up of all the VFD drives furnished under this specification.

END OF SECTION

SECTION 26 96 09 – ELECTRICAL COMMISSIONING AND FIELD TESTING AND NFPA 70E REQUIREMENTS

PART 1 GENERAL

1.1 REFERENCES

A. General

1. Related Sections – 01 81 00 Project Commissioning
2. The publications listed below form a part of this specification to the extent referenced.
3. Where a date is given for reference standards, the edition of that date shall be used. Where no date is given for reference standards, the latest edition available on the date of the Notice Inviting Bids shall be used.
4. "Engineer" and EOR (Engineer of Record) = same designation.

B. American National Standards Institute (ANSI)

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE)

1. IEEE 400, Guide for Making High-Direct-Voltage Test on Power Cable Systems in the Field
2. IEEE 519, Guide for Harmonics Control in Electrical Power Systems

D. National Electrical Testing Association (NETA)

E. National Fire Protection Association (NFPA)

1. NFPA 70, National Electrical Code (NEC)

F. Electronics Industry Alliance/Telecommunications Industry Association (EIA/TIA)

1. TIA/EIA-568-B.1, B.2, B-2-1, B.3 - Commercial Building Telecommunications Cabling Standard
2. TIA/EIA-569-B - Commercial Building Standard for Telecommunications Pathways and Spaces
3. TIA/EIA 606A - Administration Standard for the Telecommunications Infrastructure of Commercial Buildings
4. EIA/TIA 607A - Commercial Building Grounding and Bonding Requirements for Telecommunications
5. EIA -310-D - Cabinets, Racks, Panels, and Associated Equipment

G. Federal Communications Commission (FCC) part 15, part 68 and part 76

H. Rural Electrification Association (REA), Bulletin 345-63, REA Standards for Acceptance Tests and Measurements of Telephone Plant

1.2 SUBMITTALS

A. Submit in accordance with Section 26 10 00 1.704300. Submittals will include completed test reports.

B. Test procedures will adhere to NETA (National Electrical Testing Associations), NEMA, IEEE, other applicable industry standards, and/or specific requirements added by the EOR. It will be the contractor's responsibility to provide personnel to carry out and/or assist with these procedures and rectify issues as they are discovered. Test procedures shall include but not be limited to:

1. Detailed procedures in sufficient detail to verify conformance with these Specifications.
2. Incorporation of the Test Record Sheets included at the end of this Section. Use of pre-formatted test forms and/or test results by manufacturers instrumentation software is not permitted unless pre-approved by the EOR.

3. Detailed comprehensive testing schedule including:
 - a. Electrical testing of each major process area.
 - b. Each major piece of electrical distribution equipment.
 - c. Each major electrical subsystem.
 - d. Duration of each test.
 - e. Milestone test completion date.
 - f. Coordination with the master construction schedule.
 - g. Date of test results submittals following completion of the tests.
 - h. Names and qualifications of the individual(s) responsible for performing the testing.
 4. Submit six (6) like complete lists(s) of Procedures and Test Results. Tab in logical order per Voltage/Phase (descending), cables (identified "from and to"), panels with relays descending order), and all other miscellaneous equipment and systems. Submit in punched individual sheets in three-ring binders with spline identification and title sheet, index, references, and tabbed data.
- C. Following completion of the test submit the completed test results to the EOR for review. The results shall include a dedicated section with the "as-left" settings of all devices, relays, circuit breakers, system software, relay program software with PDF copy on thumb drive (one (1) per each of six (6) packages), etc.

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION

3.1 GENERAL

- A. Upon completion of various phases of the project all new electrical equipment, wiring and cabling systems shall be tested in accordance with these specifications.
- B. The Engineer reserves the right to witness all tests and shall be notified at least 5 days prior to testing.
- C. All test results shall be recorded on the attached Test Record Sheets or Contractor-equivalent that are acceptable to the Engineer (see Section 269609, 1.2 SUBMITTALS). Test records shall be submitted to the Engineer.
- D. High potential tests shall not be repeated without authorization by the Engineer.
- E. The tests shall be documented on the Test Record Sheets. The checks and tests that are required shall include, but not be limited to the following:
 1. Visually check all wire and cable connections
 2. Check all AC and DC control circuits for short circuits and extraneous grounds
 3. Functional test of power, control, and lighting circuits
 4. Functional test of electrical signal and alarm systems
 5. Continuity tests of all 600-volt power and control circuits
 6. Check grounding system
 7. Check current transformer ratios and continuity of the secondary circuits by passing current through the primary windings and taking readings of the primary current and of the current flowing through the meter, relay, and instrument coils in the secondary circuits.
 8. Checks shall be performed to determine the proper functioning of all switches, circuit breakers, relays, starters, and other items including control interlock and sequence circuits. All necessary adjustments shall be made on apparatus in accordance with the manufacturer's instructions and design requirements. Alarm systems and circuits shall be tested by manually operating the initiating devices. Relays and control components that may prove to be sluggish or otherwise unreliable shall be repaired and replaced as necessary.
 9. Special tests will be required on equipment if they are recommended by manufacturers.

- F. All safety rules and precautions shall be followed.

3.2 TESTS ON POWER, CONTROL, INSTRUMENTATION, AND LIGHTING CIRCUITS

- A. Perform continuity checks of all power, control, and instrumentation cables including each conductor of multiconductor and multipair cables.
- B. Verify wire numbers. Verify that actual wiring conforms to the construction drawings.
- C. Conductor ends shall be clean, dry, and guarded for personnel safety during testing. Circuits in the immediate vicinity that are not under test shall be grounded.
- D. Perform insulation resistance tests on 600-volt power cables. Testing shall be for one minute using 1,000 VDC.
- E. Perform insulation resistance test on medium voltage power cable. Testing shall be 1 minute using 2,500 VDC for 5 kV cables, 5,000 VDC for 15 kV cables, 7,500 VDC for 21-25 kV cables.
- F. Each conductor in a multiconductor or multipair cable or conduit shall be tested against ground with the conduit and conductor to conductor.
- G. Circuit testing shall be as follows:
 - 1. Motor control circuits tested and verified for proper operation with control stations and overcurrent devices connected.
- H. Prior to performing insulation resistance tests on cables, verify that they are not connected to a solid state device or any other connection not rated for test voltage.
- I. The Engineer shall be consulted if minimum insulation values per IEEE and/or NEMA cannot be obtained.
- J. Alarm conditions shall be simulated for each alarm point, and alarm indicators shall be checked for proper operation.
- K. Metering and indication lights for motors and other devices shall be tested for proper operation.
- L. All control circuits such as bus paralleling, motor, interlock and remote shall be tested for proper operation.

3.3 PROTECTIVE RELAYS INSPECTION AND TEST PROCEDURES

- A. Visual and Mechanical Inspection
 - 1. Compare equipment nameplate data with drawings and specifications.
 - 2. Inspect relays and cases for physical damage. Remove shipping restraint material.
 - 3. Tighten case connections. Inspect cover for correct gasket seal. Clean cover glass. Inspect shorting hardware, connection paddles, and/or knife switches. Remove any foreign material from the case. Verify target reset.
 - 4. Set relays in accordance with Relay settings sheets.
- B. Electrical Tests
 - 1. Perform insulation-resistance test on each circuit-to-frame. Determine from the manufacturer's instructions the allowable procedures for this test for solid-state and microprocessor-based relays.
 - 2. Inspect targets and indicators.
 - a. Determine pickup and dropout of relay targets.
 - b. Verify operation of all light-emitting diode indicators.
 - c. Set contrast for liquid-crystal display readouts.
 - d. Test and record for minimum trip on all taps and leave on tap to be used. Submit recorded test data to Engineer.

- e. The minimum trip accuracy for protective relays is +/-5% and the time curve calibration is +/-% from manufacture's rating and curves for the particular relay.
- f. Primary overall test for each phase and from each source.

C. Functional Operation

1. 27 - Undervoltage Relay or Element in Multifunction Relays
59 - Overvoltage
 - a. Determine dropout voltage.
 - b. Determine time delay.
 - c. Determine the time delay at a second point on the timing curve for inverse time relays.
2. 32 - Reverse Power Relay or Element in Multifunction Relays
 - a. Determine minimum pickup at maximum torque angle.
 - b. Determine closing zone
 - c. Determine maximum torque angle
 - d. Determine time delay
 - e. Verify the time delay at a second point on the timing curve for inverse time delay
3. 46 - Current Balance Relay or Element in Multifunction Relays
 - a. Determine pickup of each unit.
 - b. Determine percent slope.
 - c. Determine time delay.
4. 47 - Phase Sequence or Phase Balance Voltage Relay or Element in Multifunction Relays
 - a. Determine positive sequence voltage to close the normally open contact.
 - b. Determine positive sequence voltage to open the normally closed contact (undervoltage trip).
 - c. Verify negative sequence trip.
 - d. Determine time delay to close the normally open contact with sudden application of 120 percent of pickup.
 - e. Determine time delay to close the normally closed contact upon removal of voltage when previously set to rated system voltage.
5. 49T - Temperature (RTD) Relay or Element in Multifunction Relays
 - a. Determine trip resistance.
 - b. Determine reset resistance.
6. 50 - Instantaneous Overcurrent Relay or Element in Multifunction Relays
 - a. Determine pickup.
 - b. Determine dropout.
 - c. Determine time delay.
7. 51 - Time Overcurrent (51C, 51V) or Element in Multifunction Relays
 - a. Determine minimum pickup.
 - b. Determine time delays at two points on the time current curve.
8. 81 - Frequency Relay (Over and Under) or Element in Multifunction Relays
 - a. Determine overfrequency pickup.
 - b. Determine overfrequency time delay.
 - c. Determine underfrequency pickup.
 - d. Determine underfrequency time delay.
9. XX – other relays or functions as noted in plans and specifications.

D. Control Verification

1. Verify that each of the relay contacts performs its intended function in the control scheme including breaker trip tests, close inhibit tests, 86 lockout tests, and alarm functions.

E. System Tests

1. After the equipment is initially energized, measure magnitude and phase angle of all inputs and compare to expected values.
2. Test critical logic and controls including source transfer logic, tie breaker interlocks, generator starting and stopping, etc.

F. Test Values

1. Use manufacturer's recommended tolerances when other tolerances are not specified.
2. When critical test points are specified, the relay shall be calibrated to those points even though other test points may be out of tolerance.

3.4 GROUNDED SYSTEMS

- A. Relays and alarms for ground protection and system neutrals shall be tested and calibrated.
- B. Earth resistance measurements shall be made by using "Megger" ground-tester in accordance with the manufacturer's instructions.
- C. All ground rods and switchgear communication panels or boards, panel, motor control centers, switchboards, etc. with neutral bus disconnects.
- D. All neutral busses with protective devices in "OFF" and ground bus disconnected.
- E. Submit a complete NFPA 70E Flash Hazard Analysis from point of electrical connection (normal utility derived power and/or on or off site self-generated power) to end of run last device being distribution panel, motor disconnect, motor combination starter or any device where Maintenance and Operation personnel have access of any kind to energized or switching ports or devices. (Use IEEE 1584, NFPA 70E 2015 Annex D.4 as standard.)
 1. Prepare and apply approved sunlight and ultra-violet resistant weatherproof tags to all equipment as applicable with all approach, minimum distance, clothing, class to be used, eye/face protection to be used and tag identification corresponding to identification number on study.

TEST RECORD SHEETS

The test record sheets listed below shall be used to record testing of electrical equipment and of the electrical installation as required by these specifications. Sample copies of each sheet are attached.

Sheet No.	Title
1	Insulation Resistance (Power, Control Wire, and Cable) Test Record.
2	Insulation Resistance (Instrument Wire and Cable) Test Record
3	DC High Potential (Medium Voltage Cable) Test Record
4	Ground Electrode Testing Test Record
5	Neutral Grounding Resistor Test Record WHEN USED.
6	Bonding Resistance Readings (Nonelectrical Equipment/Structures) Test Record
7	Bonding Resistance Readings (Electrical Equipment) Test Record
8	Insulation Resistance (Transformer) Test Record
9	Insulation Resistance (Equipment) Test Record
10	Insulation Resistance (Rotating Equipment) Test Record
11	Equipment Absorption Ratio and Polarization Index Test Record.
12	Record Feeder Breaker Test Record
13	Breaker/Contactor Test Record
14	Motor Circuit Test Record
15	Medium Voltage Motor Circuit Test Record
16	Electric Motor Run-In Test Record with all VFD or Soft Start Programming As-left, Minimum, Mid-Range, or Maximum Amps, Volts, Power Factor, Kilowatts, Kilo-Volt Amperes, and Input Harmonic Analysis at each Range

**INSULATION RESISTANCE
(POWER, CONTROL WIRE, AND CABLE)
TEST RECORD**

TEST EQUIPMENT: _____ TEST VOLTAGE: _____
 TEST EQUIPMENT: _____ TEST VOLTAGE: _____
 AMBIENT TEMPERATURE: _____ °C _____ °F DATE: _____

- NOTES: 1. Perform Insulation Resistance Test (megger) between each conductor and all other conductors and metallic sheath for cables with nonshielded conductors. Test between each conductor and shield for multiconductor cables with shielded conductors. Record lowest reading for each cable.
2. Use 1,000-V test set for cable rated 600 volts and 2,500-V test set for cable rated over 600 volts.
3. Readings will vary inversely with temperature and cable length. When the use of temperature correction factors is specified, attach a second sheet with computed values. Indicate on each sheet "measured" or "temperature corrected."

Panel No. Circuit No. Feeder No.	Wire Tagging	Cable Rated Voltage	Wire or Cable				Insulation Resistance (megohms)*	Initials
			Quantity	Size	From	To		

*Minimum acceptable values:

Cable Rated <u>Voltage</u>	Test <u>Duration</u>	Resistance for <u>Cable Only</u>	Cable/Wire Size <u>or Amperage</u> (megohms)	Resistance When Cable <u>Connected to Equipment</u> (ohms)

 DISTRIBUTION: _____ CONTRACTOR/Date _____

**INSULATION RESISTANCE
(INSTRUMENT WIRE AND CABLE)
TEST RECORD**

TEST EQUIPMENT: _____ TEST VOLTAGE: _____
TEST EQUIPMENT: _____ TEST VOLTAGE: _____
AMBIENT TEMPERATURE: _____ °C _____ °F DATE: _____

- NOTES: 1. Record only the lowest value.
2. MP - Multi-pair cable. SP - Single pair cable.
3. Megger with instruments disconnected.
4. Use 250 volt (or lower voltage, when specified) range on DC test set.
5. Readings will vary with temperature and cable length.*

Cable Number or Instrument Number	Indicate MP or SP Type (2)	Conductor to Conduit (Single Pair Non-Shielded Cables) (megohms)	Conductor to Conductor (megohms) (1)	Shield to Conductor to Shield (megohms) (1)	Overall Shield to Shield (Multipair Cables Only) (megohms) (1)	Lead and Armor (Multipair Cables Only) (megohms)	Shield to Conduit (Single Pair Cables Only) (megohms)	Initials

DISTRIBUTION: _____

CONTRACTOR/Date _____

**DC HIGH POTENTIAL (MEDIUM VOLTAGE CABLE)
TEST RECORD**

CIRCUIT NUMBER: _____ REF. DWG.: _____
CABLE SIZE: _____ (SQ.MM.) _____ (MCM) FROM: _____ TO: _____
NUMBER OF CONDUCTORS: _____ NO. OF SPLICES: _____
CABLE LENGTH: _____ MANUFACTURER: _____
INSULATION TYPE: _____ THICKNESS: _____
JACKET MATERIAL: _____
WEATHER: _____ TEMP.: _____ °C _____ °F % HUMIDITY: _____ DATE: _____
TEST EQUIPMENT USED: _____

- NOTES: 1. The test voltage shown below shall be reached in 10 equal voltage increments.
2. After each voltage increase, the leakage current shall be allowed to stabilize during a 1-minute interval. If 1-minute intervals are insufficient to stabilize the current, the cable shall be discharged, and the test repeated with new time intervals of greater, but still equal duration.
3. Record the stabilized leakage current, in microamps, at the end of each time interval.
4. Allow the voltage to remain constant at the full test voltage and record the leakage current for 5 minutes for unshielded cables and 15 minutes for shielded cables.
5. Read test equipment instruction manual prior to testing cable.
6. When the plotting of test results is specified, attach the second sheet with separate plot for each phase. Note leakage current, in microamps, on "y" axis. Note step-voltage increase on "x" axis, followed by time, in minutes, for the dielectric absorption portion of the test.
7. All other phases and shields to be grounded.

Voltage hold time

at each step

_____ sec.

	_____ kV	_____ kV	_____ kV	_____ kV	_____ kV	_____ kV	_____ kV	_____ kV	_____ kV	_____ kV	_____ kV
ØA ⁷											
ØB ⁷											
ØC ⁷											

RECORD LEAKAGE CURRENT IN MICROAMPS

Time at Kv	SEC 30	MIN 1	MIN 2	MIN 3	MIN 4	MIN 5	MIN 6	MIN 7	MIN 8	MIN 9	MIN 10	MIN 11	MIN 12	MIN 13	MIN 14	MIN 15

CABLE-RATED VOLTAGE
(kilovolts)TEST VOLTAGE
(kilovolts)-----
DISTRIBUTION:

CONTRACTOR/Date _____

**GROUND ELECTRODE TESTING
TEST RECORD**

TEST EQUIPMENT: _____ (Note 1) _____ (Note 2)

REFERENCE DRAWING: _____

- NOTES: 1. Record resistance-to-earth for each electrode with all other conductors disconnected. Resistance not to exceed 25 ohms for any single anode.
2. Check continuity from each electrode to any test bar or other electrode such that the complete ground loop is tested.

Rod Number	Resistance to Earth (ohms)	Ambient Temperature (°C/°F)	Weather	Taps (4)	Initials/Date

DISTRIBUTION: _____ CONTRACTOR/Date _____

**NEUTRAL GROUNDING RESISTOR
TEST RECORD**

TEST EQUIPMENT: _____ TEST VOLTAGE: _____
TEST EQUIPMENT: _____ TEST VOLTAGE: _____

- NOTES: 1. Use 1,000-volt test set for 600-volt equipment and below, 2,500-volt test set for equipment rated over 600 volts.
2. Resistor must be disconnected from ground and neutral during Insulation Resistance (megger) and DC Overpotential Tests.
3. Resistor must be disconnected from neutral during Cold Resistance Test.
4. Apply DC Overpotential Test between terminals and ground for the complete device. (The voltage applied between the terminals of each assembly and its grounded enclosure shall be twice the rated AC voltage plus 1000 V when rated 600 V or less, or 2.25 times the rated AC voltage plus 2000 V when rated over 600 V for 1 minute. This test is a Pass/Fail test based purely on withstand alone.
5. Inspect assembly for damage and missing parts.
6. Check to assure that the center tap ratio is correct, when CT is supplied with resistor.

Verify resistor reterminated.

Tag. No.	Cold Res. (ohms)	Insul. Res. (megohms)*	Overpot. (4)	CT Ratio Pri-Sec	Reterm (4)	Initials/Date

*Minimum acceptable values:

VOLTAGE CLASS
(megohms)

INSULATION RESISTANCE

DISTRIBUTION:

CONTRACTOR/Date _____

NOTES: 1. Vessels, tanks, and structural steel bonded to the main grounding system, dedicated ground rod or foundation, as indicated on drawings listed below.

2. Measure resistance from ground wire tap (or anchor bolt) to tagged equipment frame or structural steel.

[illegible]

CONTRACTOR/Date

BONDING RESISTANCE READINGS (ELECTRICAL EQUIPMENT) TEST RECORD

TEST EQUIPMENT USED: _____ WEATHER: _____

- NOTES: 1. Electrical equipment bonded to the main grounding system or dedicated ground rod, as indicated on drawings listed below.
2. Measure resistance from ground wire tap to tagged equipment bus bars, tagged equipment enclosures, and any other points indicated on the drawings.

[illegible]

DISTRIBUTION:

CONTRACTOR/Date _____

INSULATION RESISTANCE (TRANSFORMER) TEST RECORD

SUBSTATION NO.: _____ TEST EQUIPMENT: _____

- NOTES:
1. Use 1,000-V test set for 600-volt equipment and below, 2,500-V test set for equipment rated 601 - 5,000 volts, and 5,000-V test set for equipment rated over 5,000 volts.
 2. Test voltage to be applied for 1-minute duration, and reading taken.
 3. Neutral must be disconnected from ground during test.
 4. Record temperature of surrounding air temperature for dry-type transformers.
 5. Readings will vary inversely with temperature. When the use of temperature correction factors is specified, attach second sheet with computed values. Indicate on each sheet "measured" or "temperature corrected."

[illegible]

*Minimum acceptable values:

VOLTAGE CLASS

RESISTANCE (megohms)

TESTER'S INITIALS/DATE

DISTRIBUTION:

CONTRACTOR/Date

TEST EQUIPMENT: _____ SUBSTATION: _____
 AMBIENT TEMPERATURE: _____ °C _____ °F DATE: _____
 REFERENCE DRAWING: _____ REF. SEC.: _____

- NOTES: 1. Use 1,000-V test set for equipment rated 600 volts and below, 2,500/5,000-V test set for equipment rated over 600 volts.
2. For equipment with solid state control circuits, consult manufacturer's literature for maximum test voltages.

[illegible]

*Minimum acceptable values:

EQUIPMENT VOLTAGE CLASS
(megohms)

RESISTANCE

TESTER'S INITIALS/DATE _____

DISTRIBUTION:

CONTRACTOR/Date

EQUIP. TEMP., IF KNOWN: _____ °C _____ °F HOW KNOWN: _____

- NOTES:
1. Use 1,000-V test set for equipment 600-volt and below, 2,500/5,000-V test set for equipment rated over 600 volts.
 2. Test duration shall be 1 minute, note if otherwise: _____.
 3. Isolate all motor leads from one another and from frame, test phase separately, wherever practical.
 4. Document testing of low voltage and medium voltage equipment on separate sheets.
 5. Readings will vary inversely with temperature. When the use of temperature correction factors is specified, attach second sheet with computed values. Indicate on each sheet "measured" or "temperature corrected."

[illegible]

*Minimum acceptable values:

RESISTANCE (megohms)

CONTRACTOR/Date

**EQUIPMENT ABSORPTION RATIO
AND POLARIZATION INDEX
TEST RECORD**

TEST EQUIPMENT: _____ TEST VOLTAGE: _____

AMBIENT TEMPERATURE: _____ °C _____ °F DATE: _____

EQUIP. TEMP., IF KNOWN: _____ °C _____ °F REL. HUMIDITY: _____

NOTES: 1. Perform test as indicated on Test Records for each individual equipment type. Reference the following sheets:

Transformers 8
Equipment 9
Motors and Generators 10

2. Absorption Ratio = $\frac{\text{1-Minute Resistance Value}}{\text{30-Second Resistance Value}}$

3. Polarization Index = $\frac{\text{10-Minute Resistance Value}}{\text{1-Minute Resistance Value}}$

OHMS TO GROUND 30-SECOND READING ØA TO GROUND	OHMS TO GROUND 1-MINUTE READING ØA TO GROUND	OHMS TO GROUND 10-MINUTE READING ØA TO GROUND	DIELECTRIC ABSORPTION RATIO	POLARIZATION INDEX
OHMS TO GROUND 30-SECOND READING ØB TO GROUND	OHMS TO GROUND 1-MINUTE READING ØB TO GROUND	OHMS TO GROUND 10-MINUTE READING ØB TO GROUND	DIELECTRIC ABSORPTION RATIO	POLARIZATION INDEX
OHMS TO GROUND 30-SECOND READING ØC TO GROUND	OHMS TO GROUND 1-MINUTE READING ØC TO GROUND	OHMS TO GROUND 10-MINUTE READING ØC TO GROUND	DIELECTRIC ABSORPTION RATIO	POLARIZATION INDEX

TESTER'S INITIALS/DATE _____

DISTRIBUTION: _____

CONTRACTOR/Date _____

**FEEDER BREAKER (480 V MCC)
TEST RECORD**

EQUIPMENT DESIGNATION			
LOAD (kW/kVA)		VOLTAGE	F.L.A.
CIRCUIT BREAKER MFG.		RATING	SETTING
CONDUCTOR SIZE	POWER	GROUND	

1. Check nameplate data of breaker against approved vendor drawings. _____
2. Check breaker components for cleanliness. _____
3. Check mechanical function of breaker. _____
4. Check wiring for proper identification. _____
5. Check conduits/cables for tagging. _____
6. Check components for identification. _____
7. Check equipment for conformance of area classification. _____
8. Check installation for seals, breathers, and drains. _____
9. Verify power conductor continuity. _____
10. Check that power cable insulation resistance test (megger) is completed. _____

DISTRIBUTION:

CONTRACTOR/Date _____

**BREAKER/CONTACTOR (480 V MCC)
TEST RECORD**

EQUIPMENT DESIGNATION			
LOAD (kW/kVA)	VOLTAGE	F.L.A.	
CIRCUIT BREAKER MFG.	RATING	SETTING	
CONTACTOR MFG.	SIZE		
CONDUCTOR SIZE	POWER	CONTROL	GROUND

1. Check nameplate data of breaker, contactor fuses and relays against approved vendor drawings. _____
2. Check main and auxiliary contacts. _____
3. Check contactor/breaker components for cleanliness. _____
4. Check control fuses, CPT rating, and coil voltage. _____
5. Check mechanical function of contactor and breaker. _____
6. Check wiring for proper identification. _____
7. Check conduits/cables for tagging. _____
8. Check components for identification. _____
9. Check equipment for conformance to area classification. _____
10. Check installation for seals, breathers, and drains. _____
11. Verify continuity of all power and control leads. _____
12. Check that power and control cable Insulation Resistance Test (megger) is completed. _____
13. Complete functional operation check of the control circuit using contract drawings and approved vendor drawings. Close and open the contactor using all control devices. _____

DISTRIBUTION:

CONTRACTOR/Date _____

**460 V MOTOR CIRCUIT (480 V MCC)
TEST RECORD**

EQUIPMENT DESIGNATION		
MOTOR TAG NO.	VOLTAGE	F.L.A.
KW/HP	RPM	S.F.
CIRCUIT BREAKER MFG.	RATING	SETTING
STARTER MFG.	SIZE	O/L HTR. SIZE
C.T. RATIO	O/L RELAY SETTING	
CONDUCTOR SIZE	POWER	GROUND

1. Check motor starter for cleanliness. _____
2. Check nameplate data and tagging of motor starter components for conformance to approved vendor drawings. _____
3. Check conduits and/or cables for correct tagging. _____
4. Check equipment and installation for conformance to area classification. _____
5. Check main and auxiliary contacts of breaker and contactors. _____
6. Manually check mechanical operation of breaker, contactor, O/L relay, and O/L reset device. _____
7. Check continuity of power and control cables. _____
8. Complete functional operation check of the motor control circuit using the contract drawings and approved vendor drawings. Close and open the starter using all control devices. _____
9. Verify proper operation of motor winding space heater unit. _____

DISTRIBUTION:

CONTRACTOR/Date _____

**MEDIUM VOLTAGE MOTOR CIRCUIT
TEST RECORD**

EQUIPMENT DESIGNATION		
MOTOR DESCRIPTION TAG NO. _____ MANUFACTURER _____ KW/HP _____ FLA _____		SERIAL NUMBER. _____ SERVICE FACTOR. _____ RATED VOLTAGE. _____
STARTER DESCRIPTION MANUFACTURER _____ CONTACTOR RATING _____ RATED CURRENT _____ FUSE SIZE. _____		C.T. RATIO _____ TYPE _____ RATED VOLTAGE _____ O/L RELAY SETTING _____
CONDUCTOR SIZE	POWER	CONTROL GROUND

1. Check motor starter for cleanliness. _____
2. Check nameplate data and tagging of motor starter components for conformance to approved vendor drawings. _____
3. Check conduits and/or cables for correct tagging. _____
4. Check equipment and installation for conformance to area classification. _____
5. Check installation for seals, breathers, and drains. _____
6. Check main and auxiliary contacts of breaker and contactors. _____
7. Check mechanical operation of breakers, contactors, and relay and O/L reset devices. _____
8. Check continuity of power and control cables. _____
9. Verify calibration and setting of protective relays. _____
10. Check wiring to surge arrestors, capacitors, stator RTDs and current transformers. _____
11. Complete functional operation check of the motor control circuit using the contract drawings and approved vendor drawings. Close and open the starter using all control devices. _____

GENERAL COMMENTS

DISTRIBUTION: - - - - -

CONTRACTOR/Date _____

**ELECTRIC MOTOR RUN-IN
TEST RECORD**

TEST EQUIPMENT: _____ REFERENCE DRAWING: _____

NOTES: 1. Duration of tests to comply with specifications.

TEST	REMARKS	INITIALS/DATE
RESISTANCE: Bonding resistance measured from motor frame to main ground/earth system tap. _____ ohms		
VOLTAGE: Actual voltage measured at Motor Control Center. _____ volts		
ROTATION CHECK: Bump motor to verify rotation. Motor to be uncoupled.		
NO LOAD CURRENT: At beginning of test _____ amps At end of test _____ amps		
TEMPERATURE OF BEARING: Check bearing for high temperature: Before start: 15 minutes after start 30 minutes after start 1 hour after start 2 hours after start 3 hours after start		
VIBRATION: Make visual inspection during run-test. Record any unusual vibration in remarks column.		
NOISE: Record any unusual noise in remarks column.		

DISTRIBUTION: _____

CONTRACTOR/Date _____

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

ELECT. COMMISSIONING AND FIELD TESTING
SECTION 26 96 09 -23

END OF SECTION 26 96 09

SECTION 31 11 00 - CLEARING AND GRUBBING

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. The work of this section consists of clearing, grubbing, grinding, transporting, removing and disposing of unsuitable material, trees, stumps, roots, vegetation debris, and existing improvements, including curb, gutters, landscaping, and other protruding obstructions within the clearing limits.
- B. Protect trees, landscaping and shrubs that are not designated to be removed or near construction site that may be harmed by construction activities.

1.2 RELATED WORK

- A. Section 01 57 23 – Storm Water Pollution Prevention Plan
- B. Section 01 57 27 – Dust Control
- C. Section 02 01 20 - Protection of Underground Facilities & Monuments
- D. Section 02 41 00 – Demolition

1.3 REGULATORY REQUIREMENTS

- A. Obtain all required permits.
- B. Dispose of removed materials in a legal manner at an approved disposal facility.
- C. One hundred percent of trees, stumps, rocks and associated vegetation and soils resulting from land clearing shall be reused or recycled.

1.4 REFERENCES

- A. Section 15 – Existing Facilities, State Standard Specifications
- B. Section 19 – Earthwork, State Standard Specifications

1.5 DEFINITION

- A. Unsuitable Material: Unsuitable material is material determined to be:
 - 1. Impossible to compact to specified density using ordinary methods at optimum moisture content.
 - 2. Material containing trash, debris, oversized material or other foreign and objectionable materials.
 - 3. Incapable of being compacted to Specified density using ordinary methods at optimum moisture content.

4. Too wet to be properly compacted if circumstances prevent satisfactory in-place drying prior to incorporation into the work.
5. Non-native material containing a significant amount of permeable materials, such as sand or rock, that cannot be blended with other material and requires to be off hauled.
6. Expansive clays that cannot be mixed or treated and requires to be off hauled.
7. Otherwise unsuitable for the planned use.

PART 2 - PRODUCTS

2.1 NOT USED

PART 3 - EXECUTION

3.1 CLEARING AND GRUBBING

- A. Clear the specified areas by removing, above the natural ground surface, all existing improvements including curbs, gutters, and landscaping; vegetable growth such as trees, shrubs, logs, upturned stumps, roots of down trees, brush, and similar material.
 1. Trees of 4-inch diameter and larger shall not be removed without Owner's authorization.
- B. Grub the specified areas below the natural ground surface, except in embankment areas where the grading plane is two feet or more above the natural ground, to a depth necessary to remove all boulders, stumps, roots, buried logs, and other objectionable material including rock and concrete. Remove and stock pile the top 4 inches of topsoil in any area which is to receive structural fill.

3.2 PRESERVATION

- A. If indicated or required, preserve trees, plants, rock outcroppings, or other features designated to remain. Protect trees and plants from damage; fell trees in a manner which shall not injure standing trees, plants and improvements which are to be preserved.

3.3 SALVAGE EQUIPMENT

- A. Salvaged equipment shall be delivered to the Owner at a designated site.
- B. Equipment to be salvaged is designated in Section 02 41 00 – Demolition.

END OF SECTION 311100

SECTION 312219 - FINISH GRADING

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. All areas within limits of grading and all areas outside limits of grading which are disturbed in the course of the work.
- B. All work shall be in accordance with the County of Fresno Standard Specifications, latest edition

1.2 RELATED WORK

- A. Section 31 23 00 – Earthwork

1.3 REFERENCES

- A. County of Fresno Standard Specifications, latest edition
- B. Section 19 – Earthwork, State Standard Specifications

1.4 QUALITY ASSURANCE

- A. Relative Compaction:
 - 1. All compaction testing, curves and gradation analysis will be scheduled and paid for by the Contractor at no additional cost to the Owner. Testing shall be performed by an independent Certified Geotechnical Engineering Lab, licensed in the State of California, selected by the Contractor and approved by the Owner.
 - 2. The cost of any retests, including time for the Engineer, shall be borne by the Contractor at no additional cost to the project. Testing will be required as directed by the Engineer. Test locations shall be determined by the Engineer upon notification from the Contractor that the grade is ready for tests. Contractor shall be present when samples of materials are gathered for analysis or testing.
 - 3. Contractor shall pay for all compaction tests.
- B. Tests for compaction shall conform to references listed in Part 1.3 of this section
- C. Sample backfill materials per ASTM D75.
- D. Where compaction tests indicate failure to meet the specified compaction, the Contractor will rework the entire failed area until the specified compaction has been achieved at his sole expense.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Soil:

1. Original surface soil typical of the area.
2. Capable of supporting native and specified plant growth.

PART 3 - EXECUTION

3.1 SURFACE FINISH WORK

A. Grade all disturbed areas, blending with adjacent terrain. Minor irregularities will be permitted.

1. Bring all sub-grades to specified contours, even and properly compacted.

B. Remove all stones and debris over two inches in any dimension.

C. Clean Up: Remove all rubbish and excess material for disposal as approved, and leave area in a neat, satisfactory condition.

3.2 TOLERANCES

A. Prior to placing subsequent layers of material thereon, the grading plane shall conform to one of the following:

1. Finish Grading Tolerance: ± 0.10 foot from required elevations
2. When asphalt concrete or asphalt concrete base is to be placed on the grading plane, the grading plane at any point shall not vary more than ± 0.05 foot from the design grade established by the Engineer.

3.3 ACCEPTANCE

A. Upon completion, obtain Engineer's acceptance of grade and surface.

END OF SECTION 312219

SECTION 31 23 00 - EARTHWORK

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. This section includes materials, testing and installation of earthwork for excavations, fills and embankments for streets, roadways and sites.
- B. Prepare excavation and fill for compaction testing.
- C. Work shall be performed in accordance with the requirements of the County of Fresno Standard Specifications, latest edition.

1.2 RELATED WORK

- A. Section 03 33 15 – Concrete Walks, Curbs, Gutters, and Driveways
- B. Section 31 11 00 – Clearing and Grubbing
- C. Section 31 22 19 – Finish Grading

1.3 REFERENCES

- A. County of Fresno Standard Specifications, latest edition
- B. ANSI/ASTM C136 – Sieve Analysis of Fine and Coarse Aggregates.
- C. ANSI/ASTM D698 – Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft lbf/ft³ (600 kN m/m³))
- D. ANSI/ASTM D1557 – Moisture-Density Relations of Soils and Soil-Aggregate Mixture Using 10 lb (4.54 kg) Hammer and 18-inch (457 mm) Drop.
- E. ANSI/ASTM D1556 – Density of Soil and base rock in Place by Sand-Cone Method.
- F. ASTM D75 Standard Practice for Sampling Aggregates
- G. ASTM D6938 – Density of soil and base rock in place by Nuclear method.
- H. ASTM D2937 – Density of soil and in place by Tube method. American National Standards Institute/American Society for Testing Materials (ANSI/ASTM)
- I. Section 26 – Aggregate Bases, State Standard Specifications.
- J. Section 15 – Existing Facilities, State Standard Specifications
- K. Section 18 – Dust Palliatives, State Standard Specifications
- L. Section 19 – Earthwork, State Standard Specifications

1.4 PROTECTION

- A. Protect excavations by shoring, bracing, sheet piling, underpinning, or other methods required to prevent cave-in or loose soil from falling into excavation.
 - 1. Trenches shall have sloping, sheeting, shoring, and bracing conforming with 29CFR1926, Subpart P – Excavations, CAL/OSHA requirements, and the Contract Documents.
- B. Notify Engineer of unexpected subsurface conditions.
- C. Underground utilities exist at this site. Contractor shall take all necessary precautions to protect said utilities. Notify Engineer of any deviation in utility location from that which is shown on the drawings.
- D. Protect bottom of excavations and soil adjacent to and beneath foundations from frost.
- E. Grade excavation top perimeter to prevent surface water run-off into excavation.

1.5 CONTROL AND DIVERSION OF WATER

- A. The contractor shall keep all excavation free from water. Furnish, install, maintain, and operate all necessary pumping and other equipment for dewatering of excavations. The contractor shall at all times have on the project sufficient pumping equipment for immediate use, including stand by pumps for use in case other pumps become inoperable
- B. The dewatering operation shall be continuous, so that the excavated areas are kept free from water during the construction.
- C. Dewatering devices shall be adequately filtered to prevent the removal of fines from the soil.
- D. Repair any damage caused by the failure of any part of the protective works. Remove temporary protective works when they are no longer needed for dewatering purposes.
- E. Any drain rock required in the trench bottom to convey water or stabilize wet soil shall be included at no extra cost to the owner.
- F. Provision of dewatering and dewatering equipment shall be considered part of the project with no additional compensation allowed.

1.6 SUBMITTALS

- A. Submittals shall be in accordance with Section 013300 – Submittal Procedures.
- B. Submit plans as required for worker protection against caving ground in excavation. Designs for shoring, bracing, sloping, or similar provisions shall bear the seal of a registered civil or structural engineer licensed to practice in the State of California.

1.7 SAMPLES

- A. Submit samples under provisions of Section 014000 – Quality Requirements.

1.8 QUALITY ASSURANCE

A. Compaction Testing:

1. All compaction testing shall be in accordance with Section 014000 – Quality Requirements.
2. Compaction tests will be performed for each lift or layer.
3. Tests for compaction shall conform to references listed in Part 1.3 of this section
4. Provide for visual inspection of bearing surfaces under provisions of Section 19, State Standard Specifications.
5. Compaction testing will be performed in accordance with Section 19-6.03, State Standard Specifications.
6. Sample backfill materials per ASTM D75

B. In-Place Density:

1. Compacted backfill for structures and structure foundations: At least one test per lift or per 500 cubic yards placed, whichever is more frequent.
2. Subgrade preparation including scarification and re-compaction of native soils: At least 1 test per lift per 1,000 sf of surface area or 500 cubic yards of fill placed, whichever is more frequent
3. A greater frequency of testing may be required at the start of work or when new materials, crews, or equipment are introduced to the site. A lesser frequency can be utilized if approved by the Owner's geotechnical engineer.

C. Laboratory Index Testing:

1. Compacted backfill for structures, structure foundations: Maximum dry density and optimum moisture content, Plasticity Index, and Gradation (when applicable) shall be confirmed at least once for every 2,500 cubic yards of fill placed.
2. In addition, at least one set of applicable index tests shall be performed for each distinct material type used as compacted fill at the site.
3. Additional tests may be performed, as directed by the Owner's geotechnical engineer, whenever deviations in material properties or quality of workmanship are suspected.

4. Where compaction tests indicate failure to meet the specified compaction, the Contractor will rework the entire failed area until the specified compaction has been achieved at no cost to the owner.

1.9 DEFINITION

- A. Unsuitable Material: Unsuitable material is material determined to be:
 1. Impossible to compact to specified density using ordinary methods at optimum moisture content.
 2. Material containing trash, debris, oversized material or other foreign and objectionable materials.
 3. Incapable of being compacted to specified density using ordinary methods at optimum moisture content.
 4. Too wet to be properly compacted if circumstances prevent satisfactory in-place drying prior to incorporation into the work.
 5. Non-native material containing a significant amount of permeable materials, such as sand or rock, that cannot be blended with other material and requires to be off hauled.
 6. Expansive clays that cannot be mixed or treated and requires to be off hauled.
 7. Otherwise unsuitable for the planned use.
- B. Percent Compaction: The ratio of the field in-place dry density to the laboratory maximum dry density, expressed as a percentage.
- C. Fill: For the purposes of this section, the words "fill," "backfill," and "embankment," are synonymous and refer to soils, rock, or soil-rock combinations that are conditioned, placed or replaced, and compacted to the percent compaction specified.

1.10 PROJECT CONDITIONS

- A. Underground utilities exist at this site. Contractor shall take all necessary precautions to protect said utilities. Notify Engineer of any deviation in utility location from that which is shown on the drawings.
- B. Arrange construction sequences to provide the shortest practical time that trenches will be open to avoid hazard to the public, and to minimize the possibility of trench collapse.
- C. Obtain all required permits and licenses before installing utilities and follow the rules and requirements of the authority having jurisdiction.

1.11 EXCAVATION CLASSIFICATION

- A. Regardless of the nature of material excavated, all excavation will be considered unclassified.

1.12 DISPOSAL OF EXCESS MATERIAL

- A. Excess material excavated from the site shall be disposed of by the Contractor in a lawful manner at his expense. No prearranged disposal site or related permits have been determined or secured by the Owner.
- B. Regardless of the nature of material excavated, all excavation will be considered unclassified.

PART 2 - PRODUCTS

2.1 GENERAL

- A. All backfill material shall be approved before use and be free of cinders, ashes, ice, frozen soil, large hard clods, organic debris, or other deleterious items.
- B. Engineered fill materials for all fill areas shall be as required by State Standard Specifications, Section 19-6.
- C. Gravel: Pit run, natural stone; free of shale, clay friable materials and debris; graded in accordance with 1 1/2" x 3/4" aggregate grading in State Standard Specifications Section 90-1.02C (4).
- D. Pea Gravel: Natural stone; washed, free of clay, shale, organic matter; No. 8 minimum to 3/8" maximum size per State Standard Specifications Section 90-10C(4)(a).
- E. Sand: Natural river or bank sand; free of silt, clay, loam, friable or soluble materials, and organic matter, graded in accordance with State Standard Specifications Section 90-1.02C (4)(c).
- F. Imported sand shall have a sand equivalent of 30 per ASTM D2419.
- G. Permeable material for use in backfilling under, around, and over underdrains; and permeable material for chimney drains, riprap bedding, or other subdrainage purposes shall consist of hard, durable, clean sand, gravel or crushed stone and shall be free from organic materials, clay balls, or other deleterious substances which meets State Standard Specification Section 68-2.02, Class 2.

PART 3 - EXECUTION

3.1 GENERAL

- A. Verification of Conditions: Examine the areas to receive the Work and the conditions under which the Work would be performed. Contractor shall remedy conditions detrimental to the proper and timely completion of the Work. Do not proceed until unsatisfactory conditions have been corrected.
- B. All fill and disturbed surfaces shall be compacted to a minimum of 90 percent relative compaction unless noted otherwise.

3.2 PREPARATION

- A. Identify required lines, levels, contours, and datum.

3.3 MOISTURE CONTROL

- A. Water development, hauling, and application shall be in accordance with State Standard Specifications Section 10-6, Watering.

3.4 EXCAVATION

- A. Extent: In addition to the requirements for clearing, excavate to accommodate the Work at the subgrades indicated, including to lower depths to remove existing underground utilities and debris to expose a clean soil surface free of deleterious material. Existing utilities or irrigation pipes must be removed to a point at least 5 feet horizontally outside the proposed building area. Resultant cavities must be backfilled with engineered fill.
- B. Soil disturbed as a result of demolition, undocumented fill debris, abandoned underground structures must be excavated to expose undisturbed native soil or suitable fill.
- C. Dewatering: Excavate areas to allow adequate drainage. Control the grading so that the ground is properly sloped to prevent water from running into the excavated areas. Remove water from the areas of construction that may interfere with the proper performance of the Work. Provide sumps, pumps, well points, power and attendants required, on a 24-hour basis. Protect slopes against water erosion.
- D. If the Plans require placement of fill prior to pipe, or structure excavation, the fill shall first be constructed to the design grade shown for a distance each side of the pipe or structure of not less than five times the diameter of the pipe or the width of the structure after which the trench shall be excavated and the pipe or structure installed.

3.5 SITE PREPARATION AND EARTHWORK CONSTRUCTION

- A. Soil disturbed as a result of demolition, undocumented fill debris, abandoned underground structures must be excavated to expose undisturbed native soil or suitable fill.
- B. Existing utilities or irrigation pipes to be removed must be removed to a point outside the footing influence zone (a zone below footings at a 1H:1V (horizontal: vertical) projected line from the footing edge). Resultant cavities must be backfilled with engineered fill.

3.6 ENGINEERED FILL AND EMBANKMENT CONSTRUCTION

- A. Unless otherwise noted, placement and compaction of engineered fill materials for all fill areas shall be performed according to the provisions of the State Standard Specifications, Section 19-6. Section 19-6.02A shall be amended to say that large rocky material or hard lumps large than three inches in greatest dimension will not be allowed.

- B. Compaction shall be in accordance with State Standard Specifications, Section 19-5. Compact each layer before placing the next layer. As the compaction of each layer progresses, continually level and manipulate to ensure uniform moisture and density. Add water to obtain optimum moisture content. Removal of excess water shall be accomplished through aeration by plowing, blading, disking, or other methods satisfactory to the Engineer.

3.7 SAND CEMENT SLURRY, CONCRETE ENCASEMENT AND THRUST BLOCKS

- A. Concrete
 - 1. Place as shown on the Plans and in accordance with Section 033315 – Concrete Walks, Curbs, Gutters and Driveways
- B. Slurry Cement
 - 1. Slurry Cement is also referred to as Controlled Low Strength Material (CLSM).
 - 2. Place as shown on the plans and in accordance with State Standard Specifications, Section 19-3.03F.

3.8 CONTROL OF WATER

- A. The contractor shall keep all excavation free from water. Furnish, install, maintain, and operate all necessary pumping and other equipment for dewatering of excavations. The contractor shall at all times have on the project sufficient pumping equipment for immediate use, including stand by pumps for use in case other pumps become inoperable
- B. The dewatering operation shall be continuous, so that the excavated areas are kept free from water during the construction, until backfill has been placed to a sufficient height to anchor the work against possible floatation.
- C. Dewatering devices shall be adequately filtered to prevent the removal of fines from the soil.
- D. Repair any damage caused by the failure of any part of the protective works. Remove temporary protective works when they are no longer needed for dewatering purposes.
- E. Any drain rock required in the trench bottom to convey water or stabilize wet soil shall be included at no extra cost to the owner.
- F. Provision of dewatering and dewatering equipment shall be considered part of the project with no additional compensation allowed.

3.9 SURPLUS MATERIAL

- A. Unless otherwise specified, surplus excavated material shall be used as fill for other areas requiring fill as shown on the Plans. Excess material that is not needed for engineered fill shall be exported from the site.

3.10 UNSUITABLE MATERIAL

- A. Unsuitable material shall be excavated and disposed of in a lawful manner off the project site as specified in Section 02 41 00 Demolition. All disposal shall be approved by the Owner prior to initiating the work.

3.11 SURFACE FINISH WORK

- A. Paved Areas: Replace removed paving and base course with new material of equal or better quality and of the same texture and color as the adjacent paved areas. Saw cut pavement edges to a true line and broom as needed prior to repaving.
- B. Open Areas: Grade all disturbed areas, blending with adjacent terrain. Minor irregularities will be permitted.
- C. Clean Up: Remove all rubbish and excess material for disposal as approved, and leave area in a neat, satisfactory condition.

3.12 TOLERANCES

- A. Tolerances are defined as allowable variations from specified lines, grades, and dimensions. The intent of this paragraph is to establish tolerances that are consistent with modern construction practice yet are governed by the effect that permissible variations may have upon the construction.
 - 1. Top of rough graded site: ± 0.2 foot from design grade.
 - 2. Top surface of roadway or parking lot subgrade: ± 0.05 foot from design grade.
 - 3. Top surface of aggregate base course: ± 0.05 foot from design grade.
 - 4. Top of finish graded site: ± 0.10 foot from design grade.
 - 5. Top of compacted building pad: ± 0.05 foot from design grade.
 - 6. Top of trench backfill areas: ± 0.10 foot from design grade.

3.13 PROTECTION

- A. Damage Prevention: Protect earthwork until time of acceptance so that no damage occurs

END OF SECTION 312300

SECTION 321123 - AGGREGATE BASE

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. Furnish, spread, and compact aggregate base in roadways, driveways and other paved areas as shown on the Plans.
- B. The work of this section consists of furnishing and placing aggregate base material and/or lean concrete base materials, and filler if required, on the prepared subgrade.
- C. Except as directed below, all work shall be in accordance with Section 12 of the County of Fresno Standard Specifications.

1.2 RELATED WORK

- A. Section 32 12 16 – Asphalt Concrete Paving

1.3 REFERENCES

- A. Section 10-6 – Watering, State Standard Specifications.
- B. Section 26 – Aggregate Bases, State Standard Specifications.
- C. Section 28-2 - Lean Concrete Base, State Standard Specifications.
- D. ANSI/ASTM C136 – Sieve Analysis of Fine and Coarse Aggregates.
- E. ANSI/ASTM D1557 – Moisture-Density Relations of Soils and Soil-Aggregate Mixture Using 10 lb (4.54 kg) Hammer and 18-inch (457 mm) Drop.
- F. ANSI/ASTM D1556 – Density of Soil and Base Rock in Place by Sand-Cone Method.
- G. ASTM D6938 – Density of Soil and Base Rock in Place by Nuclear Method.

1.4 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures.
- B. If materials are obtained from a commercial source, submit certification from the supplier certifying that aggregate base course meets the requirements of this section.
- C. Copies of certified weight tickets for each load of aggregate delivered to the project site.

1.5 QUALITY ASSURANCE

A. Relative Compaction:

1. All costs for initial compaction tests shall be borne by the Owner. All areas that fail to meet the minimum compaction requirements shall be reworked as required by the Engineer and retested until minimum compaction requirements are obtained.
2. The cost of any retests, including time for the Engineer, shall be borne by the Contractor at no additional cost to the project. Testing will be required as directed by the Engineer. Test locations shall be determined by the Engineer upon notification from the Contractor that the grade is ready for tests. Contractor shall be present when samples of bedding, select backfill, and backfill materials are gathered for analysis or testing.

B. Compaction tests will be performed for each lift or layer.

C. Tests for compaction shall conform to references listed in Part 1.3 of this section.

D. Sample backfill materials per ASTM D75.

E. Compaction testing will be performed in accordance with Section 19-5 of the State Standard Specifications.

1. Compaction testing of areas to be saw cut and replaced shall be one for every 300-LF of adjacent curb and gutter but not less than one for each curb cut area.
2. The Contractor shall not proceed with work over the area being tested until results have been verified by the Engineer. Immediately upon completion of each compaction test, a copy of the results shall be given by the testing laboratory to the Engineer.

F. The percentage composition by weight shall conform to Class 2 aggregate base determined by Test Method No. Calif. 202, modified by Test Method No. Calif. 905 if there is a difference in specific gravity of 0.2 or more between the coarse and fine portion of the aggregate or between blends of different aggregates.

G. Aggregate base shall also conform to the following quality requirements:

<u>Tests</u>	<u>Test Method Calif. No</u>
R-Value	301
Sand Equivalent	217
Durability Index	229

H. Quality Control shall be under the provisions of Section 01 40 00 – Quality Requirements.

PART 2 - PRODUCTS

2.1 MATERIALS

A. AGGREGATE BASE

1. Class 2 Aggregate Base, 3/4-inch maximum; as per Section 26-1.02B, State Standard Specifications.
2. Crushed Portland cement concrete which meets the gradation requirements of State Standard Specification Section 26, Class 2 Aggregate Base, 3/4-inch maximum, may be used as aggregate base course under new pavements.
3. Aggregate for Class 2 aggregate base shall be free from organic material and other deleterious substances.

B. RECYCLED AGGREGATE BASE COURSE

1. Recycled aggregate base course material must meet the requirements of State Standard Specifications, Section 26-1.02B, for Class 2, 3/4-inch maximum. This material shall not contain any metal rebar. Testing required to determine compliance of material shall be at the expense of the Contractor.
2. Recycled aggregate base may be made from Portland cement concrete or asphalt concrete, or a mix of the two.
3. No organic or other deleterious materials may be present in the material.

C. AGGREGATE SUBBASE

1. Class 2 Aggregate Subbases; as per Section 25-1.02B, State Standard Specifications.
2. Crushed Portland cement concrete which meets the gradation requirements of State Standard Specification Section 25, Class 2 Aggregate Subbase may be used as aggregate subbase course under new pavements.
3. Aggregate for Class 2 aggregate subbase shall be free from organic material and other deleterious substances.

D. LEAN CONCRETE BASE

1. Lean Concrete Base shall conform to the State Standard Specifications, Section 28-4, Lean Concrete Base Rapid Setting.
2. State Standard Specifications Section 28-4.04 shall not apply.

E. WATER

1. At the time aggregate base is spread, it shall have a moisture content sufficient to obtain the required compaction. Such moisture shall be uniformly distributed throughout the materials.

PART 3 - EXECUTION

3.1 SUBGRADE PREPARATION

- A. As specified in Sections 31 23 00 - Earthwork

3.2 SPREADING

- A. The aggregate base course material shall be deposited and spread to the required compacted thickness by means that will maintain the uniformity of the mixture. The aggregate base course shall be free from pockets of coarse or fine material.
- B. Deliver aggregate base to the area to be paved as a uniform mixture and spread each layer in one operation.
- C. Aggregate base placed at locations which are inaccessible to the spreading equipment shall be spread in two layers by any means to obtain the specified results.
- D. The aggregate shall not be treated with lime, cement or other chemical materials before the Durability Index test has been performed.
- E. The surface of the finished aggregate base at any point shall not vary more than ± 0.05 -foot from the grade shown.

3.3 PLACING

- A. If the required compacted depth of the aggregate base course exceeds 6 inches, place course in two or more layers of approximately equal thickness. The maximum compacted thickness of any one layer shall not exceed 6 inches.

3.4 MIXING

- A. Mixing shall be in accordance with one of the methods set forth in State Standard Specifications, Section 28-4.03B "Proportioning, Mixing, and Transporting".

3.5 MOISTURE CONTROL

- A. When spread, aggregate base shall have a moisture content sufficient to obtain the specified compaction.

3.6 SURFACE FINISHING

- A. Use a smooth steel wheel roller for the final rolling of top surface base course. Water surface and evenly spread loose stones before final rolling. Make minimum of two complete passes over area to embed stones. Correct soft spots developed during rolling.

- B. Compacted aggregate base course surface shall be smooth and free from waves and other irregularities. Unsatisfactory portions of base course shall be corrected, at no additional expense to the Owner.

3.7 MATERIAL ACCEPTANCE REQUIREMENTS

- A. Acceptance will be based on periodic samples and tests taken following mixing and before placing.

3.8 TOLERANCES

- A. Surface: The finished surface of the base course will be tested with a 10-foot straightedge or other device. The variation between any two contacts with the surface shall not exceed ± 0.05 feet.
- B. Width: Plan dimension, ± 0.10 feet.
- C. Thickness: Plan dimension, ± 0.05 feet.
- D. Any areas not complying with these tolerances shall be reworked to obtain conformity, at no additional expense to the Owner.

3.9 MAINTENANCE

- A. Maintain base course in a satisfactory condition until surfaced or until final acceptance.

END OF SECTION 321123

SECTION 32 12 16 - ASPHALT CONCRETE PAVING

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. The work of this section consists of constructing one or more surface courses composed of a mixture of aggregate, filler if required, asphalt material and placed on a prepared base to lines, grades and details, as shown on the plans and covered within these specifications. This section includes saw cutting and resurfacing additional paving widths as required in the contract or under permit requirements.
- B. Mix aggregate and asphalt binder at a central mixing plant. Haul, spread, and compact the mixture for paved areas as shown and as specified.
- C. Upon completion of all paving, finish the entire roadway. Trim and shape cut and fill slopes to produce smooth surfaces and uniform cross sections. Clean the finished pavement of all dirt and foreign material.
- D. Cross sections of paving shall be as indicated in the Plans.
- E. All work shall be in accordance with the County of Fresno Standard Specifications.

1.2 RELATED WORK

- A. Section 31 23 00 – Earthwork
- B. Section 32 11 23 – Aggregate Base

1.3 REFERENCES

- A. Section 22 – Finishing Roadway, State Standard Specifications
- B. Section 39 – Asphalt Concrete, State Standard Specifications
- C. Section 92 – Asphalt Binders, State Standard Specifications
- D. Section 94 – Asphaltic Emulsions, State Standard Specifications
- E. Section 96 – Geosynthetics, State Standard Specifications

1.4 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures.
- B. Certificates:
 - 1. Certification from the supplier that the asphalt concrete is of correct type and meets requirements of this section.

2. Job mix formula shall be submitted with certification that the mix formula meets the requirements of Standard Specification Specifications Section 39, Asphalt Concrete. The job mix formula shall include definite single values for:
 - a. The percent of aggregate passing the specified sieve, based on dry weight of aggregate.
 - b. The percent of bituminous material to be added, based on the total weight of the mix.
 - c. Kind and amount of chemical additives (anti-stripping, hydrated lime, etc.) as established by the design procedure.
 - d. Maximum theoretical density.
 - e. Temperature ranges for the bituminous material at the point of mixing with the aggregates and bituminous mixture at the paving machine.

1.5 QUALITY ASSURANCE

- A. Asphalt concrete supplier to prepare a mix design; to recommend adjustments to the proportions of the mix, as necessary, to conform to the mix design; and to consult with the Contractor and the Engineer during paving as required.
- B. Testing required to, determine compliance for the work of this section shall be performed by an independent testing laboratory, approved by the Engineer and appointed and paid for by the Contractor. The independent testing laboratory shall be used to sample and test asphalt concrete at the job sites. One test shall be taken for each paving period and at least one test every four hours. As a minimum, results of the test shall include items A, B, C and E of the job mix formula submittal.
- C. Density: Acceptable density of the in-place asphalt concrete pavement shall be 95 percent of the optimum values as determined from the mix design formula. Field sampling and density determination shall be made in accordance with an accepted nuclear procedure.
- D. Testing shall be performed in such a manner that will least encumber the performance of the work. The Contractor shall cooperate by rerouting equipment or by temporarily closing the immediate work area to be tested.
- E. Contractor shall instruct the testing laboratory to provide the test results to the Engineer immediately in the field and a copy of the written report sent directly to the Engineer.

PART 2 - PRODUCTS

2.1 ASPHALTS

- A. Asphalt binder to be mixed with aggregate shall be liquid asphalt PG 64-10, conforming to State Standard Specifications Section 92, Asphalt Binders.
- B. Asphalt Concrete shall be Type A, in accordance with State Standard Specifications 39-2.02.

2.2 AGGREGATE

- A. The combined aggregate grading of the asphalt concrete shall be Type A, 1/2-inch maximum grading, per Section 39-2.02B(4)(b), of the State Standard Specifications.

2.3 FORMS

- A. Redwood header boards shall be two inches wide by six inches deep (nominal measurement).
- B. Metal forms shall be submitted to Engineer for approval prior to use.

PART 3 - EXECUTION

3.1 GENERAL

- A. The pavement section shall comply with County of Fresno Standards and as shown on the Plans.
- B. Prior to any paving and surfacing operations, all pipes and conduits shall be installed and properly backfilled as shown.

3.2 MIXING

- A. Mixing shall conform to the approved mix design.
- B. The weight of asphalt binder to be mixed with aggregate shall be between 3 percent and 7 percent of the weight of the dry aggregate.

3.3 SUBGRADE

- A. Subgrade shall conform to Section 39-2.01C(3)(b), State Standard Specifications.
- B. Unless otherwise specified, the upper six inches of subgrade beneath the structural section shall be scarified, moisture conditioned as necessary and compacted to at least 95 percent relative density.

3.4 EQUIPMENT

- A. Spreading and compacting equipment shall conform to State Standard Specifications Section 39-2.01C(2), Method Compaction Equipment.

3.5 PLACING AND COMPACTING

- A. Placing and compacting shall conform to State Standard Specifications Section 39-2.05A(3)(d), Placing and Compacting Hot Mix Asphalt.
- B. Apply mixture only during hours of daylight; when air temperature is 50 degrees F or higher; when surfaces to be paved are dry and free of frost, snow or ice; and when precipitation is not imminent.

3.6 FORMS

- A. Wood or metal. Place true to line and grade, and anchor securely. Use adequately sized forms or prevent bulging and bending while the bituminous surface is being worked.

3.7 COLD PLANE ASPHALT CONCRETE PAVEMENT

- A. Existing asphalt concrete shall be cold planed at the locations and to the dimensions shown on the plans and in accordance with these special provisions.
- B. The depth, width and shape of the cut shall be as indicated on the typical cross sections or as directed by the Engineer. The final cut shall result in a uniform surface conforming to the typical cross sections. The road surfacing to remain in place shall not be damaged in any way.
- C. The depth shown on the plans for cold plane wedge cuts along existing concrete gutter are to be measured from the surface of the concrete gutter. In some cases where a prior overlay surface was constructed above the gutter lip, the actual depth of cut will exceed the dimension shown on the Plans.
- D. The Contractor shall remove existing pavement overlay from the top surface of gutters adjacent to any area specified to be cold planed.
- E. The planing machine shall be self-propelled and especially designed and built for grinding flexible pavements. It shall plane without tearing or gouging the underlying surface and blade material in a windrow. Drum lacing patterns shall permit a grooved or smooth surface finish as selected by the Engineer and the drum shall be totally enclosed in a shroud to prevent discharge of any loosened material into adjacent work areas. A zero (0) to three (3) inches deep cut to predetermined grade may be required on one (1) pass. The machine shall be adjustable as to crown and depth. The equipment shall meet the standards set by the San Joaquin Valley Air Pollution Control District and the Air Quality Act of 1969 for noise and air pollution.
- F. The Contractor shall provide a smaller machine to trim areas inaccessible to the larger machine at manholes, curb returns and intersections. The smaller machine shall be equipped with a 12-inch wide cutting drum mounted on a three-wheel

chassis allowing it to be positioned without interrupting traffic or pedestrian flow. Jack hammering areas not accessible to grinding machine will not be allowed.

- G. The surface tolerance produced shall be such that a ten-foot straight edge laid laterally will indicate variances of less than three-eighths (3/8) inch. The Contractor shall remove all loosened material from the roadway each day before leaving the site of the work.
- H. The Contractor shall protect structures and provide necessary traffic control and barricades as required by the Engineer.
- I. Temporary oil-sand ramps shall be constructed at intersecting streets, and along longitudinal joints, immediately after cold planing and prior to opening the lanes to traffic. Cold planing operations shall not commence until temporary oil-sand is on site with workers to place material.
- J. Cold planing cuts across travel lanes shall be the last cuts made at each side. After removal of loosened material from such cuts, temporary ramps shall be constructed of oil-sand at the deep end of cuts before opening the lane to traffic.
- K. Irregular, gouged, ripped or damaged areas, as determined by the Engineer, shall not be accepted. All such areas shall be repaired by methods approved by the Engineer, prior to resurfacing operations. The Engineer, at his discretion, may require substitution of planing machine and/or operating personnel if the cold-planed surface does not meet these specifications.
- L. Existing traffic detector loops damaged during cold plane operations will be returned to their original condition.
- M. After conducting cold planing operations on a given street, the Contractor shall begin pavement operations on that street within seven calendar days. Deviations from this requirement must be requested in writing and approved by the Engineer prior to the beginning of planing operations.

3.8 MISCELLANEOUS AREAS

- A. Paving miscellaneous areas shall conform to State Standard Specifications Section 39-2.01C(9), Miscellaneous Areas and Dikes.

3.9 FINISHING PAVED AREAS

- A. Finishing roadway and parking areas shall conform to the provisions of State Standard Specifications Section 22, Finishing Roadways.

3.10 ACCEPTANCE REQUIREMENTS

- A. Surface Tolerance: The variation between any two contacts with the surface shall not exceed ± 0.015 foot in 10 feet. Correct all humps or depressions exceeding the specified tolerance by removing defective work and replacing it with new material at no additional expense to the Owner.

- B. A uniform compacted thickness shall be obtained for each course equal to or greater than the thickness shown. Individual tests shall not vary by more than ± 0.02 foot.
- C. Width: Plan dimension, ± 0.02 foot.
- D. Thickness: Plan dimension, ± 0.02 foot.

END OF SECTION 321216

SECTION 321713 - PRECAST CONCRETE WHEELSTOPS

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. Installation of commercially produced precast concrete wheel stops at the locations detailed on the plans.

1.2 MEASUREMENT AND PAYMENT

- A. Measurement: Precast concrete wheel stops will be measured for payment as an aggregate lump-sum unit, acceptably installed and completed.
- B. Payment: Precast concrete wheel stops will be paid for in aggregate at the Contract Lump-sum price, as indicated in the Bid Schedule of the Bid Form.

1.3 REFERENCES

- A. State of California, Department of Transportation (Caltrans), Standard Specifications, latest edition:
 - 1. Section 95 Epoxy

1.4 SUBMITTALS

- A. Complete assembly, installation drawings, detailed specifications and data covering materials used and accessories forming part of the furnished product shall be submitted in accordance with Section 01 33 00 – Submittal Procedures.
 - 1. Submittals shall be in accordance with the Standard General Conditions and the Supplementary conditions.
- B. Product Data: Submit manufacturers' product data of precast wheel stops and epoxy adhesive for approval.

1.5 QUALITY ASSURANCE

- A. Precast concrete wheel stops shall be manufactured for the intended purpose by a company or firm specializing in the manufacture of precast concrete parking appurtenances.

PART 2 - PRODUCT

2.1 MATERIALS

- A. Precast Concrete Wheel Stops:
 - 1. Provide precast concrete wheel stops in locations shown in Drawings. Wheel stops shall be six inches or eight inches wide and six inches high, trapezoidal in profile with tapered sides and ends, and chamfered and eased corners. Lengths shall be as shown in Drawings.

2. Wheel stops to be installed on at-grade asphalt pavement shall be manufactured with two holes to accommodate the installation rebar. Holes shall be positioned a minimum of 6 inches in from each end.
 3. Wheel stops to be installed on concrete pavement shall be manufactured without holes. Adhesive is required for wheel stops installed on concrete pavement.
- B. Adhesive: Adhesive for anchoring wheel stops to concrete pavement shall be an epoxy adhesive manufactured for the purpose, similar and equal to the adhesives specified in Section 95 of the Caltrans Standard Specifications, Article 95-2.04 or 95-2.05.
- C. The concrete must be air entrained and have a minimum compressive strength of 4,000 psi.
- D. Steel Bars for Installation: Grade 60, No. 5 size.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Precast concrete wheel stops shall be anchored and secured in position on at-grade asphalt pavements, as indicated, with two No. 5 epoxy-coated rebar and an appropriate epoxy adhesive as specified in Article 2.01.B herein.
- B. Precast concrete wheel stops shall be secured in position on at-grade concrete pavements, as indicated, with an appropriate epoxy adhesive as specified in Article 2.01.B herein.

END OF SECTION 321713

SECTION 321723 - TRAFFIC MARKINGS

PART 1 - GENERAL

1.1 WORK INCLUDES

- A. The work of this section consists of furnishing and applying traffic markings.

1.2 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures.
- B. Certificate from manufacturer that materials meet the specified requirements.

1.3 QUALITY ASSURANCE

- A. Traffic markings shall be in accordance with California Manual for Uniform Traffic Control Devices (CA MUTCD) (Current Edition)

1.4 PROJECT CONDITIONS

- A. Apply traffic markings only during daylight hours, when air and pavement temperatures exceed 55 degrees F, weather conditions are favorable, and surface is clean and dry.

PART 2 - PRODUCTS

2.1 PAINT

- A. AASHTO M248-86, Type F, white or yellow traffic paint.

2.2 THERMOPLASTICS

- A. AASHTO M249, yellow or white thermoplastic striping material.

2.3 GLASS BEADS

- A. AASHTO M247, Type 2, moisture resistant with flotation properties.

2.4 RETROREFLECTIVE FILM

- A. Pliant polymer retroreflective film: Stamark, by 3M Company, or Engineer approved equivalent.
 - 1. Lines: Series 420, white and yellow.
 - 2. Legends and Symbols: Series SMS-900, white, blue, and yellow.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean area by sweeping, air blasting, or other acceptable method. Pavement markings shall be applied to the pavement surfaces, which shall be dry and free of glaze, oil, dirt, grease, or other contaminants. Surfaces not meeting these requirements shall be cleaned by the Contractor to a width equal to two inches wider than the stripe to be applied.
- B. When new pavement markings are to be applied directly over existing worn markings (such as existing edge line), the Contractor shall clean the existing residual markings to the extent necessary to ensure adherence of the new markings.

3.2 MARKINGS

- A. Lines shall be four inches wide, $\pm 1/4$ inch.
- B. Figures are as shown on drawings.

3.3 PAINT APPLICATION

- A. Line Location: Before placing paint, mark location by placing spots of paint at intervals to ensure accurate location of line. Engineer shall approve markings prior to application.
- B. Equipment: Spray machine equipped with mechanical agitator, multiple applicators, and automatic skip control, capable of painting a clean-edged stripe of the designated width. Spray nozzle shall be shielded to prevent over spraying. Use adequate hand operated equipment in areas not accessible to striping machine.
- C. Minimum Application Rates:
 - 1. For Striping four-Inch Traffic Stripes: Solid, 16.5 gallons of paint per mile; broken, 6.2 gallons of paint per mile.
 - 2. For Legends and Symbols: One gallon of paint per 100 square feet.
 - 3. For Painted stripes, legends and symbols

3.4 RETROREFLECTIVE FILM

- A. Install in accordance with the manufacturer's recommended procedures. All traffic markings on asphalt pavement shall be inlaid. Apply plastic markings during final compaction of asphalt pavement when the pavement temperature is about 140°F. Roll the marking into the surface with steel wheel roller. The finished pavement marking may extend approximately 10 mils above the final surface. Apply edge stripes by machine.

3.5 ACCEPTANCE

- A. Markings shall be accurately placed, and appear clean and uniform day and night. Unsatisfactory markings shall be corrected at no additional expense to the Owner.
- B. The Contractor shall remove and replace at no additional expense to the Owner and to the satisfaction of the Engineer any material which exhibits any of the following deficiencies:
 - 1. Non adherence to paving surface.
 - 2. Material improperly set or tracked.
 - 3. Insufficient film thickness or width of stripe.
 - 4. Materials spilled or improperly placed.

3.6 PROTECTION

- A. Protect pavement markings until dry or bonded by placing guards or warning devices as necessary and in accordance with the California Manual of Uniform Traffic Control Devices, current edition. In the event any vehicle should cross the wet marking, such marking shall be reapplied and marks, made by the vehicle, removed by the Contractor at no additional expense to the Owner.

END OF SECTION 321723

SECTION 321727 - DETECTABLE WARNING TACTILE PANELS

PART 1 - GENERAL

1.1 WORK INCLUDED

- A. The work shall consist of all labor, material, tools, equipment and services necessary to satisfactorily complete the installation of cast-in-place detectable/tactile warning surfaces at the bottom of curb ramps and other locations, including parallel curb ramps on median, as shown on the plans.

1.2 RELATED DOCUMENTS

- A. Section 03 33 15 – Concrete Walks, Curbs, Gutters & Driveways

1.3 REFERENCES

- A. Section 90 - Concrete, State Standard Specifications.

1.4 SUBMITTALS

- A. As specified in Section 01 33 00 – Submittal Procedures.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Material Test reports from independent testing laboratory indicating that the material proposed for use meets the physical properties indicated herein.
 - 2. Preparation instructions and recommendations.
 - 3. Storage and handling requirements and recommendations.
 - 4. Installation methods.
 - 5. Maintenance instructions for tactile warning panels as required.
- C. Shop Drawings: Provide fabrication details, tactile warning panel surface profile, and plans of placement including joints.
- D. Verification Samples: For each finish product specified, two samples, minimum size 4 inches square, representing actual product, color, and patterns

1.5 QUALITY ASSURANCE

- A. Detectable tactile warning surfaces shall comply in all respects with the Americans with Disabilities Act requirements.

PART 2 - PRODUCTS

2.1 MANUFACTURE

- A. Detectable Warning Tactile Panels shall be equivalent in all respects to those manufactured by the following, to the satisfaction of the Engineer:
 - 1. Detectable Warning Systems' AlertCast product; or
 - 2. Access Tile's Replaceable Cast-in-Place Tiles.

2.2 PANELS

- A. Detectable Warning Tactile Panels shall be made of thermos-set composite, shall be colorfast and UV stable. Panel color shall be Federal Yellow.
- B. Dome geometry shall be in compliance with "ADA Regulations for Detectable Warning Panels" and State Standard Plans.
- C. Panel edges shall have one-half-inch bevel in accordance with ADA requirements regarding Change in Level.
- D. Panels shall meet the following minimum requirements:

Compressive Strength:	30,000 psi
Flexural Strength:	18,000 psi
Dome Spacing:	2.35" center to center
Slip Resistance Index:	1.03 dry, 0.83 wet
Color:	Integral throughout

2.3 ATTACHMENT

- A. Panels shall attach to the new concrete by means of a penetrating anchor system, which shall be placed into the wet concrete immediately after it is poured and before the concrete takes its initial set. Panels shall be attached to the anchors by means of screws. A minimum of four anchors are required per panel.

PART 3 - EXECUTION

3.1 GENERAL

- A. Consult Plans and Details for areas to receive detectable warning panels. Place panels at the bottom of curb ramps or blended transitions. Install across the full width of ramp a minimum 36" in depth and set back 6"-8" from curb line in accordance with installation details. Provide adequate drainage to prevent the accumulation of water and debris on or at the bottom of ramp.

3.2 ATTACHMENT OF PANELS

- A. Panels shall be screwed to the inset anchors placed in the underlying concrete substrate. Attachment system may be supplemented by but shall not rely upon adhesives.

3.3 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.
- B. Expansion joints and control joints shall be located in compliance with ACI recommendations. Joint materials shall follow manufacturer's directions and instructions.

3.4 PREPARATION

- A. Prepare a well-drained and properly compacted subgrade for the panel. Leave no puddles, standing water, ice, frost, or mud. See the Plans and Details for specific sections and preparation information.

3.5 WARRANTY

- A. Manufacture shall warrant that purchased shall be free from defects in material and workmanship and shall not split or crack under normal use and conditions for a period of five (5) years from date of substantial completion.

END OF SECTION 321727

SECTION 323119 - DECORATIVE METAL FENCES AND GATES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Decorative steel fences.
2. Swing gates.
3. Horizontal-slide gates.
4. Gate operators.

B. Related Requirements:

1. Section 033000 "Cast-in-Place Concrete" for concrete bases for gate operators, drives, and controls and post concrete fill.
2. Division 26 Sections for electrical service and connections for system disconnect switches and powered devices including, but not limited to, motor operators, controls, and limit switches.

1.2 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

B. Shop Drawings: For fencing and gates.

1. Include plans, elevations, sections, gate locations, post spacing, and details.
2. Gate Operator: Show locations and details for installing operator components, switches, and controls. Indicate motor size, electrical characteristics, drive arrangement, mounting, and grounding provisions.
3. Wiring Diagrams: Include diagrams for power, signal, and control wiring.

C. Samples: For each fence material and for each color specified.

1. Provide Samples 12 inches in length for linear materials.
2. Provide Samples 12 inches square for sheet or plate materials.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.
- B. Product Test Reports: For decorative metallic-coated-steel tubular picket fences, including finish, indicating compliance with referenced standards.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For gate operators to include in maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Fabricator of products.

PART 2 - PRODUCTS

2.1 DECORATIVE STEEL FENCES

- A. Decorative Steel Fence Assembly: Fences made from steel tubing bars and shapes.
- B. Basis-of-Design Product: Subject to compliance with requirements, provide Ameristar Montage Commercial Ornamental Steel Fence and Personnel Swing Gate with Passport Commercial Ornamental Rolling Gates or comparable product by one of the following:
 - 1. Ameristar Perimeter Security; ASSA ABLOY
 - 2. Ametco Manufacturing Corporation
 - 3. Builders Fence Company, Inc.
- C. Fasteners: Stainless steel carriage bolts and tamperproofnuts.
- D. Fabrication:
 - 1. Assemble fences into sections by welding pickets to rails.
 - a. Fabricate sections with clips welded to rails for field fastening to posts.
 - b. Drill posts and clips for fasteners before finishing to maximum extent possible.
- E. Finish exposed welds to comply with NOMMA Guideline 1, Finish #2 - completely sanded joint, some undercutting and pinholes okay.
- F. Galvanizing: For items other than hardware that are indicated to be galvanized, hot-dip galvanize to comply with ASTM A123/A123M. For hardware items, hot-dip galvanize to comply with ASTM A153/A153M.
 - 1. Hot-dip galvanize posts and rails.

- 2. Hot-dip galvanize rail and picket assemblies after fabrication.
- G. Finish for Steel Items: High-performance coating.
- H. Finish for Metallic-Coated-Steel Items: High-performance coating.

2.2 SWING GATES

- A. Gate Configuration: Single leaf.
- B. Gate Frame Height: As indicated on Drawings.
- C. Gate Opening Width: As indicated on Drawings.
- D. Gate Type: As indicated on Drawings.
- E. Galvanized-Steel Frames and Bracing: Fabricate members from square tubes **2 by 2 inches** formed from **0.108-inch** nominal-thickness, metallic-coated steel sheet or formed from **0.105-inch** nominal-thickness steel sheet and hot-dip galvanized after fabrication.
- F. Frame Corner Construction: Welded.
- G. Additional Rails: Provide as indicated, complying with requirements for fence rails.
- H. Gate Infill: As indicated on Drawings.
- I. Spring Hinges: BHMA A156.17, Grade 1, suitable for exterior use.
 - 1. Function: 320 - Gate spring pivot hinge. Adjustable tension.
 - 2. Material: Malleable iron; galvanized.
- J. Mortise Locks: BHMA A156.13, Grade 1, suitable for exterior use.
 - 1. Function: F07 - Storeroom or closet lock.
 - 2. Material: Brass or bronze.
 - 3. Levers: Cast, forged, or extruded brass or bronze.
 - 4. Mounting Box: Configuration necessary to enclose locks. Fabricate from **1/8-inch** thick steel plate; galvanized.
- K. Electric Strikes: BHMA A156.31, Grade 1, of configuration required for use with lock specified, fail-secure, and suitable for exterior use.
 - 1. Mounting Plate: Configuration necessary for mounting electric strikes. Fabricate from **1/8-inch** thick steel plate; galvanized.
 - 2. Mounting: Mortise into post.
- L. Finish exposed welds to comply with NOMMA Guideline 1, Finish #2 - completely sanded joint, some undercutting and pinholes okay.
- M. Galvanizing: For items other than hardware that are indicated to be galvanized, hot-dip

galvanize to comply with ASTM A123/A123M. For hardware items, hot-dip galvanize to comply with ASTM A153/A153M.

- N. Metallic-Coated-Steel Finish: High-performance coating.
- O. Steel Finish: High-performance coating.

2.3 HORIZONTAL-SLIDE GATES

- A. Gate Configuration: Single leaf for vehicle assembly.
 - 1. Type:
 - a. Groundtrack slide.
- B. Gate Frame Height: As indicated on Drawings.
- C. Gate Opening Width: As indicated on Drawings.
- D. Automated vehicular gates are to comply with ASTM F2200, Class II.
- E. Additional Rails: Provide as indicated, complying with requirements for fence rails.
- F. Finish exposed welds to comply with NOMMA Guideline 1, Finish #2 - completely sanded joint, some undercutting and pinholes okay.
- G. Galvanizing: For items other than hardware that are indicated to be galvanized, hot-dip galvanize to comply with ASTM A123/A123M. For hardware items, hot-dip galvanize to comply with ASTM A153/A153M.
- H. Metallic-Coated-Steel Finish: High-performance coating.
- I. Steel Finish: High-performance coating.

2.4 GATE OPERATORS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Chamberlain Group, Inc. (The)
 - 2. DoorKing, Inc
 - 3. Hy-Security Gate, Inc.; Nice North America; Nice group
- B. Gate Operator Components: Provide factory-assembled automatic operating system designed for gate size, type, weight, and operation frequency. Provide operation control system with characteristics suitable for Project conditions, with remote-control stations, safety devices, and weatherproof enclosures; coordinate electrical requirements with building electrical system.

1. Design operator so that motor may be removed without disturbing limit-switch adjustment and without affecting auxiliary emergency operator.
 2. Provide ASTM F2200-listed automated vehicular gates.
- C. Comply with NFPA 70.
- D. Emergency Access Requirements: Comply with requirements of authorities having jurisdiction for automatic gate operators on gates that must provide emergency access.
- E. Motor Characteristics: Sufficient to start, accelerate, and operate connected loads at designated speeds, within installed environment, with indicated operating sequence, and without exceeding nameplate rating or considering service factor. Comply with NEMA MG 1 and the following:
1. Voltage: NEMA standard voltage selected to operate on nominal circuit voltage to which motor is connected.
 2. Phase: One.
 3. Enclosure: Manufacturer's standard.
 4. Duty: Continuous duty at ambient temperature of **110 deg F** and at altitude of **600 ft.** above sea level.
 5. Service Factor: 1.15 for open dripproof motors; 1.0 for totally enclosed motors.
- F. Gate Operator Supports: Concrete base mounted and as follows:
1. Mechanical Gate Operators: Slide.
 - a. Duty: Heavy duty, commercial/industrial.
 - b. Gate Speed: Fully open to fully close. Speed as recommended in writing by manufacturer.
 - c. Maximum Gate Weight: **800 lb.**
 - d. Frequency of Use: Continuous duty.
 - e. Operating Type: Wheel-and-rail drive, with manual release.
- G. Activation Controls: Electric controls separated from gate and motor and drive mechanism, with NEMA ICS 6, Type 1 enclosure for pedestal mounting, and with space for additional optional equipment. Provide the following remote-control device(s):
1. Card Reader: Functions only when authorized card is presented. Programmable, multiple-code system, permitting four different access periods.
 - a. Reader Type: Proximity.
 - b. Features: Capable of monitoring and auditing gate activity.
 - c. Verify card reader type and features with the County of Fresno Internal Services Department.
- H. Vehicle-Sensing System: System includes automatic closing timer with adjustable time delay and presence detector designed to open and close gate. System includes electronic detector with adjustable detection patterns, adjustable sensitivity and frequency settings, and panel indicator light designed to detect presence or transit of a vehicle over an embedded loop of wire and to emit a signal that activates the gate operator. Consult detection system manufacturer's written recommendations for

number of loops consisting of multiple strands of wire, number of turns, loop size, and method of placement, and indicate locations on Drawings.

- I. Obstruction-Detection Devices: Provide each motorized gate with automatic safety sensor(s). Activation of sensor(s) causes operator to immediately function as follows:
 - 1. Action: Reverse gate in both opening and closing cycles, and hold until clear of obstruction.
 - 2. Internal Sensor: Built-in torque or current monitor senses gate is obstructed.
 - 3. Sensor Edge: Contact-pressure-sensitive safety edge, profile, and sensitivity designed for type of gate and component indicated on Drawings, in locations as recommended in writing by manufacturer. .
- J. Emergency Release Mechanism: Quick-disconnect release of operator drive system of the following type, permitting manual operation if operator fails. Design system so control-circuit power is disconnected during manual operation.
 - 1. Type: Integral fail-safe release, allowing gate to be pushed open without mechanical devices, keys, cranks, or special knowledge.
- K. Battery Backup System: Battery-powered drive and access-control system, independent of primary drive system.
 - 1. Fail-Secure: Gate cycles on battery power, then fail-safe when battery is drained.
- L. Accessories:
 - 1. Warning Module: Visual, strobe-light alarm sounding three to five seconds in advance of gate operation and continuing until gate stops moving; compliant with the United States Access Board's ADA-ABA Accessibility Guidelines.
 - 2. Fire box.
 - 3. Instructional, Safety, and Warning Labels and Signs: In accordance with UL 325.

2.5 STEEL AND IRON MATERIALS

- A. Plates, Shapes, and Bars: ASTM A36/A36M.
- B. Tubing: ASTM A500/A500M, cold-formed steel tubing.
- C. Uncoated Steel Sheet: cold-rolled steel sheet, ASTM A1008/A1008M, Structural Steel, [Grade 50](#).
- D. Galvanized-Steel Sheet: ASTM A653/A653M, structural quality, [Grade 50](#), with [G90](#) coating.
- E. Castings: Either gray or malleable iron unless otherwise indicated on Drawings.
 - 1. Gray Iron: ASTM A48/A48M, Class 30.
 - 2. Malleable Iron: ASTM A47/A47M.

2.6 MISCELLANEOUS MATERIALS

- A. Welding Rods and Bare Electrodes: Select in accordance with AWS specifications for metal alloy welded.
- B. Concrete: Normal-weight, air-entrained, ready-mix concrete complying with requirements in Section 033000 "Cast-in-Place Concrete" with a minimum 28-day compressive strength of **3000 psi**, **3-inch** slump, and **1-inch** maximum aggregate size.
- C. Nonshrink Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C1107/C1107M and specifically recommended in writing by manufacturer for exterior applications.

2.7 GROUNDING MATERIALS

- A. Grounding Conductors: Size as indicated on Drawings. Bare, solid wire for No. 6 AWG and smaller; stranded wire for No. 4 AWG and larger.
 - 1. Material above Finished Grade: Copper.
 - 2. Material on or below Finished Grade: Copper.
 - 3. Bonding Jumpers: Braided copper tape, **1-5/8 inch** wide and **1/16 inch** thick, woven of No. 30 AWG bare copper wire, terminated with copper ferrules.
- B. Grounding Connectors and Grounding Rods: Comply with UL 467.
 - 1. Grounding Rods: Copper-clad steel.
 - a. Size: **5/8 by 96 inches**.

2.8 STEEL FINISHES

- A. Surface Preparation: Clean surfaces in accordance with SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning." After cleaning, apply a conversion coating compatible with the organic coating to be applied over it.
- B. Shop-Painted Finish: Comply with Section 099113 "Exterior Painting."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and conditions, with Installer present, for compliance with requirements for site clearing, earthwork, pavement work, construction layout, and other conditions affecting performance of the Work.
- B. Do not begin installation before final grading is completed unless otherwise permitted by Architect.

- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Stake locations of fence lines, gates, and terminal posts. Do not exceed intervals of **500 ft.** or line of sight between stakes. Indicate locations of utilities, lawn sprinkler system, underground structures, benchmarks, and property monuments.
 - 1. Construction layout and field engineering are specified in Section 017300 "Execution."

3.3 INSTALLATION OF DECORATIVE FENCES

- A. Install fences in accordance with manufacturer's written instructions.
- B. Post Excavation: Drill or hand-excavate holes for posts in firm, undisturbed soil. Excavate holes to a diameter of not less than 4 times post size and a depth of not less than **24 inches** plus **3 inches** for each **foot** or fraction of a **foot** that fence height exceeds **4 ft.**
- C. Post Setting: Set posts in concrete at indicated spacing into firm, undisturbed soil.
 - 1. Verify that posts are set plumb, aligned, and at correct height and spacing, and hold in position during setting with concrete or mechanical devices.
 - 2. Concrete Fill: Place concrete around posts and vibrate or tamp for consolidation. Protect aboveground portion of posts from concrete splatter.
 - a. Concealed Concrete: Top **2 inches** below grade to allow covering with surface material. Slope top surface of concrete to drain water away from post.
 - 3. Posts Set in Concrete: Extend post to within **6 inches** of specified excavation depth, but not closer than **3 inches** to bottom of concrete.
 - 4. Space posts uniformly at **6 ft.** o.c.

3.4 INSTALLATION OF GATES

- A. Install gates in accordance with manufacturer's written instructions, level, plumb, and secure for full opening without interference. Attach hardware using tamper-resistant or concealed means. Install ground-set items in concrete for anchorage. Adjust hardware for smooth operation and lubricate where necessary.

3.5 INSTALLATION OF GATE OPERATORS

- A. General: Install gate operators in accordance with manufacturer's written instructions, aligned and true to fence line and grade.
- B. Excavation: Hand-excavate holes for concrete bases in firm, undisturbed soil to

dimensions and depths and at locations as required by gate operator component manufacturer's written instructions and as indicated on Drawings.

- C. Concrete Bases: Cast-in-place or precast concrete, depth not less than 12 inches, dimensioned and reinforced in accordance with gate operator component manufacturer's written instructions and as indicated on Drawings.
- D. Vehicle-Sensing System: Cut grooves in pavement and bury and seal wire loop in accordance with manufacturer's written instructions. Connect to equipment operated by detector.
- E. Comply with NFPA 70 and manufacturer's written instructions for grounding of electric-powered motors, controls, and other devices.

3.6 GROUNDING AND BONDING

- A. Fence Grounding: Install at maximum intervals of 1500 ft. except as follows:
 - 1. Fences within 100 Ft. (30 m) of Buildings, Structures, Walkways, and Roadways: Ground at maximum intervals of 750 ft..
 - a. Gates and Other Fence Openings: Ground fence on each side of opening.
 - 1) Bond metal gates to gate posts.
 - 2) Bond across openings, with and without gates, except at openings indicated as intentional fence discontinuities. Use No. 2 AWG wire and bury it at least 18 inches below finished grade.
- B. Protection at Crossings of Overhead Electrical Power Lines: Ground fence at location of crossing and at a maximum distance of 150 ft. on each side of crossing.
- C. Grounding Method: At each grounding location, drive a grounding rod vertically until the top is 6 inches below finished grade. Connect rod to fence with No. 6 AWG conductor. Connect conductor to each fence component at grounding location.
- D. Bonding Method for Gates: Connect bonding jumper between gate post and gate frame.
- E. Connections: Make connections so possibility of galvanic action or electrolysis is minimized. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact are galvanically compatible.
 - 1. Use electroplated or hot-tin-coated materials to ensure high conductivity and to make contact points closer in order of galvanic series.
 - 2. Make connections with clean, bare metal at points of contact.
 - 3. Make aluminum-to-steel connections with stainless steel separators and mechanical clamps.
 - 4. Make aluminum-to-galvanized-steel connections with tin-plated copper jumpers and mechanical clamps.
 - 5. Coat and seal connections having dissimilar metals with inert material to prevent

future penetration of moisture to contact surfaces.

3.7 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
 - 1. Grounding-Resistance Tests: Subject completed grounding system to a megger test at each grounding location. Measure grounding resistance not less than two full days after last trace of precipitation, without soil having been moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural grounding resistance. Perform tests by two-point method in accordance with IEEE 81.
 - 2. Excessive Grounding Resistance: If resistance to grounding exceeds specified value, notify Architect promptly. Include recommendations for reducing grounding resistance and a proposal to accomplish recommended work.
 - 3. Report: Prepare test reports of grounding resistance at each test location certified by a testing agency. Include observations of weather and other phenomena that may affect test results.

3.8 ADJUSTING

- A. Gates: Adjust gates to operate smoothly, easily, and quietly, free of binding, warp, excessive deflection, distortion, nonalignment, misplacement, disruption, or malfunction, throughout entire operational range. Confirm that latches and locks engage accurately and securely without forcing or binding.
- B. Automatic Gate Operators: Energize circuits to electrical equipment and devices. Adjust operators, controls, safety devices, alarms, and limit switches.
 - 1. Hydraulic Operators: Purge operating system, adjust pressure and fluid levels, and check for leaks.
 - 2. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
 - 3. Test and adjust controls, alarms, and safeties. Replace damaged and malfunctioning controls and equipment.
- C. Lubricate hardware, gate operators, and other moving parts.

3.9 DEMONSTRATION

- A. Train Owner's personnel to adjust, operate, and maintain gates.

END OF SECTION 323119

SECTION 323300 - SITE FURNISHINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Bicycle racks.

B. Related Requirements:

1. Section 033000 "Cast-in-Place Concrete" for installing anchor bolts cast in concrete footings.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Product Schedule: For site furnishings. Use same designations indicated on Drawings.

1.3 CLOSEOUT SUBMITTALS

A. Maintenance Data: For site furnishings to include in maintenance manuals.

PART 2 - PRODUCTS

2.1 BICYCLE RACKS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. American Bicycle Security Company
2. Madrax; Graber Manufacturing, Inc.

B. Bicycle Rack Construction:

1. Frame: Galvanized steel.
 - a. Pipe OD: Not less than [2-3/8 inches](#).
2. Style: As indicated.
 - a. Overall Height: As indicated.

- b. Overall Width: As indicated.
 - c. Overall Depth: As indicated.
 - d. Capacity: Designed to accommodate no fewer than 12 bicycles.
- 3. Security: Designed to lock wheel and frame.
- 4. Installation Method: As indicated.
- C. Steel Finish: Galvanized.

2.2 MATERIALS

- A. Steel and Iron: Free of surface blemishes and complying with the following:
 - 1. Plates, Shapes, and Bars: ASTM A36/A36M.
 - 2. Steel Pipe: Standard-weight steel pipe complying with ASTM A53/A53M, or electric-resistance-welded pipe complying with ASTM A135/A135M.
 - 3. Tubing: Cold-formed steel tubing complying with ASTM A500/A500M.
 - 4. Mechanical Tubing: Cold-rolled, electric-resistance-welded carbon or alloy steel tubing complying with ASTM A513/A513M, or steel tubing fabricated from steel complying with ASTM A1011/A1011M and complying with dimensional tolerances in ASTM A500/A500M; zinc coated internally and externally.
 - 5. Sheet: Commercial steel sheet complying with ASTM A1011/A1011M.
- B. Anchors, Fasteners, Fittings, and Hardware: Galvanized steel; commercial quality, concealed, recessed, and capped or plugged.
- C. Galvanizing: Where indicated for steel and iron components, provide the following protective zinc coating applied to components after fabrication:
 - 1. Zinc-Coated Tubing: External, zinc with organic overcoat, consisting of a minimum of **0.9 oz./sq. ft.** of zinc after welding, a chromate conversion coating, and a clear, polymer film. Internal, same as external or consisting of 81 percent zinc pigmented coating, not less than **0.3 mil** thick.
 - 2. Hot-Dip Galvanizing: According to ASTM A123/A123M, ASTM A153/A153M, or ASTM A924/A924M.

2.3 FABRICATION

- A. Metal Components: Form to required shapes and sizes with true, consistent curves, lines, and angles. Separate metals from dissimilar materials to prevent electrolytic action.
- B. Welded Connections: Weld connections continuously. Weld solid members with full-length, full-penetration welds and hollow members with full-circumference welds. At exposed connections, finish surfaces smooth and blended, so no roughness or unevenness shows after finishing and welded surface matches contours of adjoining surfaces.
- C. Pipes and Tubes: Form simple and compound curves by bending members in jigs to

produce uniform curvature for each repetitive configuration required; maintain cylindrical cross section of member throughout entire bend without buckling, twisting, cracking, or otherwise deforming exposed surfaces of handrail and railing components.

- D. Exposed Surfaces: Polished, sanded, or otherwise finished; all surfaces smooth, free of burrs, barbs, splinters, and sharpness; all edges and ends rolled, rounded, or capped.
- E. Factory Assembly: Factory assemble components to greatest extent possible to minimize field assembly. Clearly mark units for assembly in the field.

2.4 GENERAL FINISH REQUIREMENTS

- A. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and conditions, with Installer present, for compliance with requirements for correct and level finished grade, mounting surfaces, installation tolerances, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Comply with manufacturer's written installation instructions unless more stringent requirements are indicated. Complete field assembly of site furnishings where required.
- B. Unless otherwise indicated, install site furnishings after landscaping and paving have been completed.
- C. Install site furnishings level, plumb, true, and securely anchored at locations indicated on Drawings.
- D. Post Setting: Set cast-in support posts in concrete footing with smooth top, shaped to shed water. Protect portion of posts above footing from concrete splatter. Verify that posts are set plumb or at correct angle and are aligned and at correct height and spacing. Hold posts in position during placement and finishing operations until concrete is sufficiently cured.

END OF SECTION 323300



County of Fresno

DEPARTMENT OF PUBLIC WORKS AND PLANNING
STEVEN E. WHITE, DIRECTOR

May 22, 2025

Eric Bowen - Owner
BMY Construction Group, Inc.
5485 E. Olive Ave.
Fresno, CA 93727

Transmitted by email to: estimating@bmyinc.com; fhogan@bmyinc.com

**Subject: Notice of Approval, DBH Olive Avenue Campus Remodel
Contract No. 24-S-09**

Dear Eric:

We received your request on May 15, 2025 to allow the purchase of Builder's Risk until just prior to receiving the Notice to Proceed due to the expense. **A Notice to Proceed will not be issued prior to the County of Fresno receiving evidence of Builder's Risk insurance** in accordance with Article XI of the Agreement and Section 007200 General Conditions Article 2.40 E.1 Insurance.

The contract between your firm and the County of Fresno for the referenced project became conditionally operative on May 20, 2025. A copy of the executed contract is enclosed.

DIR Project ID **20250579082** is assigned to Contract No. **24-S-09**

The enclosed copy of Section 41 of the Charter of the County of Fresno is for your reference and compliance. If you have any questions, contact Jennica Geddert at jgeddert@fresnocountyca.gov or (559) 353-4919.

Sincerely,

Mohammad Alimi, Ph.D., P.E.
Design Division Engineer


Jennica Geddert (May 22, 2025 13:09 PDT)

Jennica Geddert
Senior Staff Analyst

Enclosures

cc: Board of Supervisors
Auditor – Controller
Financial Services
Construction Management
Design Division – Design Services

Bond No. EACX4049447
Premium: \$104,609

Document A312™ – 2010

Conforms with The American Institute of Architects AIA Document 312

Performance Bond

CONTRACTOR:

(Name, legal status and address)

BMJ Construction Group, Inc.
5485 E. Olive Avenue
Fresno, CA 93727

SURETY:

(Name, legal status and principal place of business)

Endurance Assurance Corporation
4 Manhattanville Road, 3rd Floor
Purchase, NY 10577

Mailing Address for Notices

(same as above)

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

OWNER:

(Name, legal status and address)

County of Fresno
2220 Tulare St.
Fresno, CA 93721

CONSTRUCTION CONTRACT

Date: April 22, 2025

Amount: \$ Seventeen Million Six Hundred Eighty Seven Thousand and 00/100 Dollars (\$17,687,000.00)

Description:

(Name and location)

DBH OLIVE AVENUE CAMPUS REMODEL
Contract No. 24-S-09
5555 E. Olive Avenue, Fresno, CA 93727

BOND

Date: April 23, 2025


(Not earlier than Construction Contract Date)

Amount: \$ Seventeen Million Six Hundred Eighty Seven Thousand and 00/100 Dollars (\$17,687,000.00)

Modifications to this Bond: ☒ None ☐ See Section 16

CONTRACTOR AS PRINCIPAL

Company: *(Corporate Seal)*
BMJ Construction Group, Inc.

Signature: 

Name *ERIC L. BOWER*
and Title *President*

SURETY

Company: *(Corporate Seal)*
Endurance Assurance Corporation

Signature: 

Name Jon Richard Sullivan
and Title Attorney-in-Fact

(Any additional signatures appear on the last page of this Performance Bond.)

(FOR INFORMATION ONLY — Name, address and telephone)

AGENT or BROKER:

M.B. McGowan & Associates Insurance Agency, Inc.
5955 De Soto Ave., Suite 250, Woodland Hills, CA 91367
707-815-5867

OWNER'S REPRESENTATIVE:

(Architect, Engineer or other party:)

§ 1 The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to the Owner for the performance of the Construction Contract, which is incorporated herein by reference.

§ 2 If the Contractor performs the Construction Contract, the Surety and the Contractor shall have no obligation under this Bond, except when applicable to participate in a conference as provided in Section 3.

§ 3 If there is no Owner Default under the Construction Contract, the Surety's obligation under this Bond shall arise after

- .1 the Owner first provides notice to the Contractor and the Surety that the Owner is considering declaring a Contractor Default. Such notice shall indicate whether the Owner is requesting a conference among the Owner, Contractor and Surety to discuss the Contractor's performance. If the Owner does not request a conference, the Surety may, within five (5) business days after receipt of the Owner's notice, request such a conference. If the Surety timely requests a conference, the Owner shall attend. Unless the Owner agrees otherwise, any conference requested under this Section 3.1 shall be held within ten (10) business days of the Surety's receipt of the Owner's notice. If the Owner, the Contractor and the Surety agree, the Contractor shall be allowed a reasonable time to perform the Construction Contract, but such an agreement shall not waive the Owner's right, if any, subsequently to declare a Contractor Default;
- .2 the Owner declares a Contractor Default, terminates the Construction Contract and notifies the Surety; and
- .3 the Owner has agreed to pay the Balance of the Contract Price in accordance with the terms of the Construction Contract to the Surety or to a contractor selected to perform the Construction Contract.

§ 4 Failure on the part of the Owner to comply with the notice requirement in Section 3.1 shall not constitute a failure to comply with a condition precedent to the Surety's obligations, or release the Surety from its obligations, except to the extent the Surety demonstrates actual prejudice.

§ 5 When the Owner has satisfied the conditions of Section 3, the Surety shall promptly and at the Surety's expense take one of the following actions:

§ 5.1 Arrange for the Contractor, with the consent of the Owner, to perform and complete the Construction Contract;

§ 5.2 Undertake to perform and complete the Construction Contract itself, through its agents or independent contractors;

§ 5.3 Obtain bids or negotiated proposals from qualified contractors acceptable to the Owner for a contract for performance and completion of the Construction Contract, arrange for a contract to be prepared for execution by the Owner and a contractor selected with the Owner's concurrence, to be secured with performance and payment bonds executed by a qualified surety equivalent to the bonds issued on the Construction Contract, and pay to the Owner the amount of damages as described in Section 7 in excess of the Balance of the Contract Price incurred by the Owner as a result of the Contractor Default; or

§ 5.4 Waive its right to perform and complete, arrange for completion, or obtain a new contractor and with reasonable promptness under the circumstances:

- .1 After investigation, determine the amount for which it may be liable to the Owner and, as soon as practicable after the amount is determined, make payment to the Owner; or
- .2 Deny liability in whole or in part and notify the Owner, citing the reasons for denial.

§ 6 If the Surety does not proceed as provided in Section 5 with reasonable promptness, the Surety shall be deemed to be in default on this Bond seven days after receipt of an additional written notice from the Owner to the Surety demanding that the Surety perform its obligations under this Bond, and the Owner shall be entitled to enforce any remedy available to the Owner. If the Surety proceeds as provided in Section 5.4, and the Owner refuses the payment or the Surety has denied liability, in whole or in part, without further notice the Owner shall be entitled to enforce any remedy available to the Owner.

§ 7 If the Surety elects to act under Section 5.1, 5.2 or 5.3, then the responsibilities of the Surety to the Owner shall not be greater than those of the Contractor under the Construction Contract, and the responsibilities of the Owner to the Surety shall not be greater than those of the Owner under the Construction Contract. Subject to the commitment by the Owner to pay the Balance of the Contract Price, the Surety is obligated, without duplication, for

- .1 the responsibilities of the Contractor for correction of defective work and completion of the Construction Contract;
- .2 additional legal, design professional and delay costs resulting from the Contractor's Default, and resulting from the actions or failure to act of the Surety under Section 5; and
- .3 liquidated damages, or if no liquidated damages are specified in the Construction Contract, actual damages caused by delayed performance or non-performance of the Contractor.

§ 8 If the Surety elects to act under Section 5.1, 5.3 or 5.4, the Surety's liability is limited to the amount of this Bond.

§ 9 The Surety shall not be liable to the Owner or others for obligations of the Contractor that are unrelated to the Construction Contract, and the Balance of the Contract Price shall not be reduced or set off on account of any such unrelated obligations. No right of action shall accrue on this Bond to any person or entity other than the Owner or its heirs, executors, administrators, successors and assigns.

§ 10 The Surety hereby waives notice of any change, including changes of time, to the Construction Contract or to related subcontracts, purchase orders and other obligations.

§ 11 Any proceeding, legal or equitable, under this Bond may be instituted in any court of competent jurisdiction in the location in which the work or part of the work is located and shall be instituted within two years after a declaration of Contractor Default or within two years after the Contractor ceased working or within two years after the Surety refuses or fails to perform its obligations under this Bond, whichever occurs first. If the provisions of this Paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall be applicable.

§ 12 Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address shown on the page on which their signature appears.

§ 13 When this Bond has been furnished to comply with a statutory or other legal requirement in the location where the construction was to be performed, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

§ 14 Definitions

§ 14.1 **Balance of the Contract Price.** The total amount payable by the Owner to the Contractor under the Construction Contract after all proper adjustments have been made, including allowance to the Contractor of any amounts received or to be received by the Owner in settlement of insurance or other claims for damages to which the Contractor is entitled, reduced by all valid and proper payments made to or on behalf of the Contractor under the Construction Contract.

§ 14.2 **Construction Contract.** The agreement between the Owner and Contractor identified on the cover page, including all Contract Documents and changes made to the agreement and the Contract Documents.

§ 14.3 **Contractor Default.** Failure of the Contractor, which has not been remedied or waived, to perform or otherwise to comply with a material term of the Construction Contract.

§ 14.4 **Owner Default.** Failure of the Owner, which has not been remedied or waived, to pay the Contractor as required under the Construction Contract or to perform and complete or comply with the other material terms of the Construction Contract.

§ 14.5 **Contract Documents.** All the documents that comprise the agreement between the Owner and Contractor.

§ 15 If this Bond is issued for an agreement between a Contractor and subcontractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

§ 16 Modifications to this bond are as follows:

(Space is provided below for additional signatures of added parties, other than those appearing on the cover page.)

CONTRACTOR AS PRINCIPAL

Company: _____
(Corporate Seal)

SURETY

Company: _____
(Corporate Seal)

Signature: _____
Name and Title: _____
Address _____

Signature: _____
Name and Title: _____
Address _____

CALIFORNIA ACKNOWLEDGMENT

CIVIL CODE § 1189

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California

County of

Fresno

On

April 28, 2025

Date

before me,

Janna Jensen, Notary Public

Here Insert Name and Title of the Officer

personally appeared

Eric Bower

Name(s) of Signer(s)

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.



I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.

Place Notary Seal and/or Stamp Above

Signature

Janna Jensen

Signature of Notary Public

OPTIONAL

Completing this information can deter alteration of the document or fraudulent reattachment of this form to an unintended document.

Description of Attached Document

Title or Type of Document: _____

Document Date: _____ Number of Pages: _____

Signer(s) Other Than Named Above: _____

Capacity(ies) Claimed by Signer(s)

Signer's Name: _____

☐ Corporate Officer – Title(s): _____

☐ Partner – ☐ Limited ☐ General

☐ Individual ☐ Attorney in Fact

☐ Trustee ☐ Guardian or Conservator

☐ Other: _____

Signer is Representing: _____

Signer's Name: _____

☐ Corporate Officer – Title(s): _____

☐ Partner – ☐ Limited ☐ General

☐ Individual ☐ Attorney in Fact

☐ Trustee ☐ Guardian or Conservator

☐ Other: _____

Signer is Representing: _____

ACKNOWLEDGMENT

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California
County of Orange


On April 23, 2025 before me, Emma Nichols, Notary Public
(insert name and title of the officer)

personally appeared Jon Richard Sullivan,
who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are
subscribed to the within instrument and acknowledged to me that he/she/they executed the same in
his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the
person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing
paragraph is true and correct.

WITNESS my hand and official seal.

Signature  (Seal)





SOMPO INTERNATIONAL

INSURANCE

POWER OF ATTORNEY

14938

KNOW ALL BY THESE PRESENTS, that **Endurance Assurance Corporation**, a Delaware corporation ('EAC'), **Endurance American Insurance Company**, a Delaware corporation ('EAIC'), **Lexon Insurance Company**, a Texas corporation ('LIC'), and/or **Bond Safeguard Insurance Company**, a South Dakota corporation ('BSIC'), each, a "Company" and collectively, "**Sompo International**," do hereby constitute and appoint: **Emmalyn Nichols, Cathrine A Pinney, Jon Richard Sullivan, Matt Lockie**

as true and lawful Attorney(s)-In-Fact to make, execute, seal, and deliver for, and on its behalf as surety or co-surety; bonds and undertakings given for any and all purposes, also to execute and deliver on its behalf as aforesaid renewals, extensions, agreements, waivers, consents or stipulations relating to such bonds or undertakings provided, however, that no single bond or undertaking so made, executed and delivered shall obligate the Company for any portion of the penal sum thereof in excess of the sum of **One Hundred Million (\$100,000,000.00)**

Such bonds and undertakings for said purposes, when duly executed by said attorney(s)-in-fact, shall be binding upon the Company as fully and to the same extent as if signed by the President of the Company under its corporate seal attested by its Corporate Secretary.

This appointment is made under and by authority of certain resolutions adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC, a copy of which appears below under the heading entitled "Certificate".

This Power of Attorney is signed and sealed by facsimile under and by authority of the following resolution adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolution has not since been revoked, amended or repealed:

RESOLVED, that the signature of an individual named above and the seal of the Company may be affixed to any such power of attorney or any certificate relating thereto by facsimile, and any such power of attorney or certificate bearing such facsimile signature or seal shall be valid and binding upon the Company in the future with respect to any bond or undertaking to which it is attached.

IN WITNESS WHEREOF, each Company has caused this instrument to be signed by the following officers, and its corporate seal to be affixed this 25th day of May, 2023.

Endurance Assurance Corporation

Endurance American Insurance Company

Lexon Insurance Company

Bond Safeguard Insurance Company

Richard M Appel

Richard M Appel

Richard M Appel

Richard M Appel

By:
Richard Appel; SVP & Senior Counsel

By:
Richard Appel; SVP & Senior Counsel

By:
Richard Appel; SVP & Senior Counsel

By:
Richard Appel; SVP & Senior Counsel



ACKNOWLEDGEMENT

On this 25th day of May, 2023, before me, personally came the above signatories known to me, who being duly sworn, did depose and say that he/she is an officer of each of the Companies; and that he executed said instrument on behalf of each Company by authority of his office under the by-laws of each Company.

By:

Amy Taylor

Amy Taylor, Notary Public – My Commission Expires 3/9/27



CERTIFICATE

I, the undersigned Officer of each Company, DO HEREBY CERTIFY that:

1. That the original power of attorney of which the foregoing is a copy was duly executed on behalf of each Company and has not since been revoked, amended or modified; that the undersigned has compared the foregoing copy thereof with the original power of attorney, and that the same is a true and correct copy of the original power of attorney and of the whole thereof;
2. The following are resolutions which were adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolutions have not since been revoked, amended or modified:
"RESOLVED, that each of the individuals named below is authorized to make, execute, seal and deliver for and on behalf of the Company any and all bonds, undertakings or obligations in surety or co-surety with others: RICHARD M. APPEL, MATTHEW E. CURRAN, MARGARET HYLAND, SHARON L. SIMS, CHRISTOPHER L. SPARRO,
and be it further
RESOLVED, that each of the individuals named above is authorized to appoint attorneys-in-fact for the purpose of making, executing, sealing and delivering bonds, undertakings or obligations in surety or co-surety for and on behalf of the Company."
3. The undersigned further certifies that the above resolutions are true and correct copies of the resolutions as so recorded and of the whole thereof.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal this

23rd

day of

April

2025

By: Daniel S. Luge, Secretary

NOTICE: U. S. TREASURY DEPARTMENT'S OFFICE OF FOREIGN ASSETS CONTROL (OFAC)

No coverage is provided by this Notice nor can it be construed to replace any provisions of any surety bond or other surety coverage provided. This Notice provides information concerning possible impact on your surety coverage due to directives issued by OFAC. **Please read this Notice carefully.**

The Office of Foreign Assets Control (OFAC) administers and enforces sanctions policy, based on Presidential declarations of "national emergency". OFAC has identified and listed numerous foreign agents, front organizations, terrorists, terrorist organizations, and narcotics traffickers as "Specially Designated Nationals and Blocked Persons". This list can be located on the United States Treasury's website – <https://www.treasury.gov/resource-center/sanctions/SDN-List>. In accordance with OFAC regulations, if it is determined that you or any other person or entity claiming the benefits of any coverage has violated U.S. sanctions law or is a Specially Designated National and Blocked Person, as identified by OFAC, any coverage will be considered a blocked or frozen contract and all provisions of any coverage provided are immediately subject to OFAC. When a surety bond or other form of surety coverage is considered to be such a blocked or frozen contract, no payments nor premium refunds may be made without authorization from OFAC. Other limitations on the premiums and payments may also apply.

Any reproductions are void.

Surety Claims Submission: LexonClaimAdministration@sompo-intl.com

Telephone: 615-553-9500 Mailing Address: Sompo International; 12890 Lebanon Road; Mount Juliet, TN 37122-2870

**PAYMENT BOND - PUBLIC WORK
SECTIONS 3247 - 3252, CIVIL CODE
(CALIFORNIA)**

Endurance Assurance Corporation **SURETY COMPANY**

Bond No. EACX4049447

Premium: Included on Performance Bond

KNOW ALL MEN BY THESE PRESENTS:

THAT WHEREAS, The County of Fresno has awarded to BMY Construction Group, Inc.

as Contractor, a contract for the work described as follows: DBH OLIVE AVENUE CAMPUS REMODEL.

AND WHEREAS, Said Contractor is required to furnish a bond in connection with said contract, to secure the payment of claims of laborers, mechanics, materialmen, and other persons as provided by law.

NOW, THEREFORE, We the undersigned Contractor and Surety are held and firmly bound unto the County of Fresno in the amount required by law, the sum of \$ \$17,687,000.00, for which payment well and truly to be made we bind ourselves, our heirs, executors and administrators, successors and assigns, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH,

That if said Contractors shall fail to pay (1) Any of the persons named in Civil Code Section 3181, (2) amounts due under the Unemployment Insurance Code for work or labor performed in connection with said contract by any such claimant, or (3) any amounts required to be deducted, withheld and paid over to the Employment Development Department and to the Franchise Tax Board from wages of the employees of Contractor and his sub-contractors with respect to such work and labor, pursuant to Section 13020 of the Unemployment Insurance Code, then the Surety or Sureties herein will pay for the same in an aggregate amount not exceeding the sum specified in this bond, and also in case suit is brought upon the bond, a reasonable attorney's fee, to be fixed by the court, otherwise the above obligation shall be void.

This bond shall inure to the benefit of any of the persons named in Civil Code Section 3181 so as to give a right of action to such persons or their assigns in any suit brought upon this bond.

This bond is executed and filed to comply with the provisions of the act of Legislature of the State of California as designated in Civil Code, Sections 3247 - 3252 inclusive, and all amendments thereto.

IN WITNESS WHEREOF, We have hereunto set our hands and seals on this 23rd day of April, 2025.

BMY Construction Group, Inc.


Eric L. Bower, President

Contractor

Endurance Assurance Corporation **SURETY COMPANY**

By 
Jon Richard Sullivan, Attorney-in-Fact

CALIFORNIA ACKNOWLEDGMENT

CIVIL CODE § 1189

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California

County of

Fresno

On

April 28, 2025

Date

before me,

Janna Jensen, Notary Public

Here Insert Name and Title of the Officer

personally appeared

Eric Bower

Name(s) of Signer(s)

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.



I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.

Place Notary Seal and/or Stamp Above

Signature

Janna Jensen

Signature of Notary Public

OPTIONAL

Completing this information can deter alteration of the document or fraudulent reattachment of this form to an unintended document.

Description of Attached Document

Title or Type of Document: _____

Document Date: _____ Number of Pages: _____

Signer(s) Other Than Named Above: _____

Capacity(ies) Claimed by Signer(s)

Signer's Name: _____

☐ Corporate Officer – Title(s): _____

☐ Partner – ☐ Limited ☐ General

☐ Individual ☐ Attorney in Fact

☐ Trustee ☐ Guardian or Conservator

☐ Other: _____

Signer is Representing: _____

Signer's Name: _____

☐ Corporate Officer – Title(s): _____

☐ Partner – ☐ Limited ☐ General

☐ Individual ☐ Attorney in Fact

☐ Trustee ☐ Guardian or Conservator

☐ Other: _____

Signer is Representing: _____

ACKNOWLEDGMENT

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California
County of Orange)


On April 23, 2025 before me, Emma Nichols, Notary Public
(insert name and title of the officer)

personally appeared Jon Richard Sullivan,
who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are
subscribed to the within instrument and acknowledged to me that he/she/they executed the same in
his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the
person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing
paragraph is true and correct.

WITNESS my hand and official seal.

Signature  (Seal)





KNOW ALL BY THESE PRESENTS, that **Endurance Assurance Corporation, a Delaware corporation ('EAC'), Endurance American Insurance Company, a Delaware corporation ('EAIC'), Lexon Insurance Company, a Texas corporation ('LIC'), and/or Bond Safeguard Insurance Company, a South Dakota corporation ('BSIC'), each, a "Company" and collectively, "Sompo International,"** do hereby constitute and appoint: **Emmalyn Nichols, Cathrine A Pinney, Jon Richard Sullivan, Matt Lockie**

as true and lawful Attorney(s)-In-Fact to make, execute, seal, and deliver for, and on its behalf as surety or co-surety; bonds and undertakings given for any and all purposes, also to execute and deliver on its behalf as aforesaid renewals, extensions, agreements, waivers, consents or stipulations relating to such bonds or undertakings provided, however, that no single bond or undertaking so made, executed and delivered shall obligate the Company for any portion of the penal sum thereof in excess of the sum of **One Hundred Million (\$100,000,000.00)**

Such bonds and undertakings for said purposes, when duly executed by said attorney(s)-in-fact, shall be binding upon the Company as fully and to the same extent as if signed by the President of the Company under its corporate seal attested by its Corporate Secretary.

This appointment is made under and by authority of certain resolutions adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC, a copy of which appears below under the heading entitled "Certificate".

This Power of Attorney is signed and sealed by facsimile under and by authority of the following resolution adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolution has not since been revoked, amended or repealed:

RESOLVED, that the signature of an individual named above and the seal of the Company may be affixed to any such power of attorney or any certificate relating thereto by facsimile, and any such power of attorney or certificate bearing such facsimile signature or seal shall be valid and binding upon the Company in the future with respect to any bond or undertaking to which it is attached.


IN WITNESS WHEREOF, each Company has caused this instrument to be signed by the following officers, and its corporate seal to be affixed this 25th day of May, 2023.


Endurance Assurance Corporation

Endurance American Insurance Company


Lexon Insurance Company

Bond Safeguard Insurance Company

By: 
Richard Appel; SVP & Senior Counsel

By: 
Richard Appel; SVP & Senior Counsel


By: 
Richard Appel; SVP & Senior Counsel

By: 
Richard Appel; SVP & Senior Counsel




On this 25th day of May, 2023, before me, personally came the above signatories known to me, who being duly sworn, did depose and say that he/she is an officer of each of the Companies; and that he executed said instrument on behalf of each Company by authority of his office under the by-laws of each Company.

By:



Amy Taylor, Notary Public – My Commission Expires 3/9/27



CERTIFICATE

I, the undersigned Officer of each Company, DO HEREBY CERTIFY that:

1. That the original power of attorney of which the foregoing is a copy was duly executed on behalf of each Company and has not since been revoked, amended or modified; that the undersigned has compared the foregoing copy thereof with the original power of attorney, and that the same is a true and correct copy of the original power of attorney and of the whole thereof;
2. The following are resolutions which were adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolutions have not since been revoked, amended or modified:
"RESOLVED, that each of the individuals named below is authorized to make, execute, seal and deliver for and on behalf of the Company any and all bonds, undertakings or obligations in surety or co-surety with others: RICHARD M. APPEL, MATTHEW E. CURRAN, MARGARET HYLAND, SHARON L. SIMS, CHRISTOPHER L. SPARRO,
and be it further
RESOLVED, that each of the individuals named above is authorized to appoint attorneys-in-fact for the purpose of making, executing, sealing and delivering bonds, undertakings or obligations in surety or co-surety for and on behalf of the Company."
3. The undersigned further certifies that the above resolutions are true and correct copies of the resolutions as so recorded and of the whole thereof.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal this

23rd

day of

April

, 20

25

By: Daniel S. Lute, Secretary

NOTICE: U. S. TREASURY DEPARTMENT'S OFFICE OF FOREIGN ASSETS CONTROL (OFAC)

No coverage is provided by this Notice nor can it be construed to replace any provisions of any surety bond or other surety coverage provided. This Notice provides information concerning possible impact on your surety coverage due to directives issued by OFAC. **Please read this Notice carefully.**

The Office of Foreign Assets Control (OFAC) administers and enforces sanctions policy, based on Presidential declarations of "national emergency". OFAC has identified and listed numerous foreign agents, front organizations, terrorists, terrorist organizations, and narcotics traffickers as "Specially Designated Nationals and Blocked Persons". This list can be located on the United States Treasury's website – <https://www.treasury.gov/resource-center/sanctions/SDN-List>.

In accordance with OFAC regulations, if it is determined that you or any other person or entity claiming the benefits of any coverage has violated U.S. sanctions law or is a Specially Designated National and Blocked Person, as identified by OFAC, any coverage will be considered a blocked or frozen contract and all provisions of any coverage provided are immediately subject to OFAC. When a surety bond or other form of surety coverage is considered to be such a blocked or frozen contract, no payments nor premium refunds may be made without authorization from OFAC. Other limitations on the premiums and payments may also apply.

Any reproductions are void.

Surety Claims Submission: LexonClaimAdministration@sompo-intl.com

Telephone: 615-553-9500 Mailing Address: Sompo International; 12890 Lebanon Road; Mount Juliet, TN 37122-2870



BMYCONS-01

JLOPER

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

5/15/2025

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Lodi-Alliant Insurance Services, Inc. 641 South Ham Ln Ste A Lodi, CA 95242	CONTACT NAME: Tami Whittle	
	PHONE (A/C, No, Ext):	FAX (A/C, No):
	E-MAIL ADDRESS: twhittle@alliant.com	
	INSURER(S) AFFORDING COVERAGE	
	INSURER A : National Union Fire Ins Co of Pittsburgh, Pa.	
	INSURER B : Starr Indemnity & Liability Company	
INSURED BMJ Construction Group, Inc 5485 E. Olive Ave Fresno, CA 93727	NAIC #	
	19445	
	38318	
	INSURER C :	
	INSURER D :	
	INSURER E :	
INSURER F :		

COVERAGES

CERTIFICATE NUMBER:

REVISION NUMBER: 1

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	☒ COMMERCIAL GENERAL LIABILITY ☐ CLAIMS-MADE ☒ OCCUR ☒ Owner's & Contractor GEN'L AGGREGATE LIMIT APPLIES PER: ☐ POLICY ☒ PRO-JECT ☐ LOC OTHER:	X	X	3296928	9/1/2024	9/1/2025	EACH OCCURRENCE \$ 2,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 300,000 MED EXP (Any one person) \$ 10,000 PERSONAL & ADV INJURY \$ 2,000,000 GENERAL AGGREGATE \$ 4,000,000 PRODUCTS - COMP/OP AGG \$ 4,000,000
A	☒ AUTOMOBILE LIABILITY ☒ ANY AUTO OWNED AUTOS ONLY ☒ HIRED AUTOS ONLY ☐ SCHEDULED AUTOS ☒ NON-OWNED AUTOS ONLY	X	X	2507820	9/1/2024	9/1/2025	COMBINED SINGLE LIMIT (Ea accident) \$ 2,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$
B	☒ UMBRELLA LIAB ☒ OCCUR ☒ EXCESS LIAB ☐ CLAIMS-MADE DED ☒ RETENTION \$ 10,000			000589100241	9/1/2024	9/1/2025	EACH OCCURRENCE \$ 8,000,000 AGGREGATE \$ 8,000,000
A	☒ WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) ☐ If yes, describe under DESCRIPTION OF OPERATIONS below	N/A	X	WC048240256	9/1/2024	9/1/2025	☒ PER STATUTE ☐ OTH-ER E.L. EACH ACCIDENT \$ 1,000,000 E.L. DISEASE - EA EMPLOYEE \$ 1,000,000 E.L. DISEASE - POLICY LIMIT \$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

RE: #25007 - DBH Olive Avenue Campus Remodel - 5555 E. Olive Ave., Fresno, CA 93727.

The County of Fresno, Department of Public Works and Planning, its officers, officials, employees and volunteers are additional insureds as respects General Liability and Automobile Liability per attached endorsements. GL & Auto coverage is primary. Per project aggregate applies per attached endorsements. GL, Auto & WC waiver of subrogation apply per attached endorsements. Minimum of thirty (30) days' notice of cancellation given to County of Fresno.

Builders risk will be bound prior to NTP and revised certificate will be issued

CERTIFICATE HOLDER

CANCELLATION

The County of Fresno, Department of Public Works and Planning 2220 Tulare Street, 8th Floor Fresno, CA 93721	SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.
	AUTHORIZED REPRESENTATIVE

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

**ADDITIONAL INSURED - OWNERS, LESSEES OR
CONTRACTORS - SCHEDULED PERSON OR
ORGANIZATION**

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART

SCHEDULE

Name Of Additional Insured Person(s) Or Organization(s)	Location(s) Of Covered Operations
ANY PERSON OR ORGANIZATION WHOM YOU BECOME OBLIGATED TO INCLUDE AS AN ADDITIONAL INSURED AS A RESULT OF ANY CONTRACT OR AGREEMENT YOU HAVE ENTERED INTO.	PER THE CONTRACT OR AGREEMENT.
Information required to complete this Schedule, if not shown above, will be shown in the Declarations.	

A. Section II – Who Is An Insured is amended to include as an additional insured the person(s) or organization(s) shown in the Schedule, but only with respect to liability for "bodily injury", "property damage" or "personal and advertising injury" caused, in whole or in part, by:

1. Your acts or omissions; or
2. The acts or omissions of those acting on your behalf;

in the performance of your ongoing operations for the additional insured(s) at the location(s) designated above.

However:

1. The insurance afforded to such additional insured only applies to the extent permitted by law; and
2. If coverage provided to the additional insured is required by a contract or agreement, the insurance afforded to such additional insured will not be broader than that which you are required by the contract or agreement to provide for such additional insured.

B. With respect to the insurance afforded to these additional insureds, the following additional exclusions apply:

This insurance does not apply to "bodily injury" or "property damage" occurring after:

1. All work, including materials, parts or equipment furnished in connection with such work, on the project (other than service,

maintenance or repairs) to be performed by or on behalf of the additional insured(s) at the location of the covered operations has been completed; or

2. That portion of "your work" out of which the injury or damage arises has been put to its intended use by any person or organization other than another contractor or subcontractor engaged in performing operations for a principal as a part of the same project.

C. With respect to the insurance afforded to these additional insureds, the following is added to **Section III – Limits Of Insurance:**

If coverage provided to the additional insured is required by a contract or agreement, the most we will pay on behalf of the additional insured is the amount of insurance:

1. Required by the contract or agreement; or
2. Available under the applicable limits of insurance;

whichever is less.

This endorsement shall not increase the applicable limits of insurance.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ADDITIONAL INSURED - OWNERS, LESSEES OR CONTRACTORS - COMPLETED OPERATIONS

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART

SCHEDULE

Name Of Additional Insured Person(s) Or Organization(s)	Location And Description Of Completed Operations
ANY PERSON OR ORGANIZATION WHOM YOU BECOME OBLIGATED TO INCLUDE AS AN ADDITIONAL INSURED AS A RESULT OF ANY CONTRACT OR AGREEMENT YOU HAVE ENTERED INTO.	PER THE CONTRACT OR AGREEMENT.
Information required to complete this Schedule, if not shown above, will be shown in the Declarations.	

A. Section II – Who Is An Insured is amended to include as an additional insured the person(s) or organization(s) shown in the Schedule, but only with respect to liability for "bodily injury" or "property damage" caused, in whole or in part, by "your work" at the location designated and described in the Schedule of this endorsement performed for that additional insured and included in the "products-completed operations hazard".

However:

1. The insurance afforded to such additional insured only applies to the extent permitted by law; and
2. If coverage provided to the additional insured is required by a contract or agreement, the insurance afforded to such additional insured will not be broader than that which you are required by the contract or agreement to provide for such additional insured.

B. With respect to the insurance afforded to these additional insureds, the following is added to **Section III – Limits Of Insurance**:

If coverage provided to the additional insured is required by a contract or agreement, the most we will pay on behalf of the additional insured is the amount of insurance:

1. Required by the contract or agreement; or
2. Available under the applicable limits of insurance;

whichever is less.

This endorsement shall not increase the applicable limits of insurance.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

PRIMARY AND NONCONTRIBUTORY - OTHER INSURANCE CONDITION

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
LIQUOR LIABILITY COVERAGE PART
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART

The following is added to the **Other Insurance** Condition and supersedes any provision to the contrary:

Primary And Noncontributory Insurance

This insurance is primary to and will not seek contribution from any other insurance available to an additional insured under your policy provided that:

(1) The additional insured is a Named Insured under such other insurance; and

(2) You have agreed in writing in a contract or agreement that this insurance would be primary and would not seek contribution from any other insurance available to the additional insured.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ENDORSEMENT

This endorsement, effective 12:01 A.M. 9/1/24 forms a part of

Policy No. 3296928

By NATIONAL UNION FIRE INSURANCE COMPANY OF PITTSBURGH, PA

AMENDMENT OF LIMITS OF INSURANCE (Per Project or Per Location Aggregate Limit)

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE FORM

I. Your policy is amended to include either a Per Project General Aggregate Limit, a Per Location General Aggregate Limit or a Per Project and Per Location General Aggregate Limit. Please select only one of the following:

☒ [X] Per Project General Aggregate Limit	\$2,000,000
☐ [] Per Location General Aggregate Limit	\$
☐ [] Per Project and Per Location General Aggregate Limit	\$

IF NEITHER OF THESE BOXES ARE CHECKED, THIS ENDORSEMENT IS VOID. IF MORE THAN ONE OF THE THESE BOXES ARE CHECKED, THIS ENDORSEMENT IS VOID.

II. **SECTION III – LIMITS OF INSURANCE**, is amended to include the following:

1. The Limits of Insurance and the rules below fix the most we will pay regardless of the number of:
 - a. Insureds;
 - b. Claims made or "suits" brought; or
 - c. Persons or organizations making claims or bringing "suits".
2. The General Aggregate Limit is the most we will pay for the sum of :
 - a. Medical expenses under Coverage C;
 - b. Damages under Coverage A, except damages because of "bodily injury" or "property damage" included in the products-completed operations hazard"; and
 - c. Damages under Coverage B.
3. The Products-Completed Operations Aggregate Limit is the most we will pay under Coverage A for damages because of "bodily injury" and "property damage" included in the "products-completed operations hazard".
4. Subject to 2. above, the Personal and Advertising Injury Limit is the most we will pay under Coverage B for the sum of all damages because of all "personal and advertising injury" sustained by any one person or organization.
5. Subject to 2. or 3. above, whichever applies, the Each Occurrence Limit is the most we will pay for the sum of:

- a. Damages under Coverage A; and
- b. Medical expenses under Coverage C

because of all "bodily injury" and "property damage" arising out of any one "occurrence".

- 6. Subject to 5. above, the Damage to Premises Rented To You Limit is the most we will pay under Coverage A because of "property damage" to any one premises, while rented to you, or in the case of damage by fire, while rented to you or temporarily occupied by you with permission of the owner.
- 7. Subject to 5. above, the Medical Expense Limit is the most we will pay under Coverage C for all medical expenses because of "bodily injury" sustained by any one person.
- 8. Subject to 2., 4., 5., 6., and/or 7. above, the Per Project Aggregate Limit is the most we will pay under Coverages A, B, and C combined for the sum of:
 - a. Damages under Coverage A;
 - b. Damages under Coverage B; and
 - c. Medical Expenses under Coverage C

arising out of any single Project described above.

- 9. Subject to 2., 4., 5., 6., and/or 7. above, the Per Location Aggregate Limit is the most we will pay under Coverages A, B, and C combined for the sum of:
 - a. Damages under Coverage A;
 - b. Damages under Coverage B; and
 - c. Medical expenses under Coverage C

arising out of the any single Location described above.

The Limits of Insurance of this Coverage Part apply separately to each consecutive annual period and to any remaining period of less than 12 months, starting with the beginning of the policy period shown in the Declarations, unless the policy period is extended after issuance for an additional period of less than 12 months. In that case, the additional period will be deemed part of the last preceding period for purposes of determining the Limits of Insurance.

III. The Limits of Insurance shown in the Declarations are deleted in their entirety and replaced by the Limits of Insurance set forth below.

General Aggregate Limit	\$15,000,000
Each Occurrence Limit	\$2,000,000
Products-Completed Operations Aggregate Limit	\$4,000,000
Personal & Advertising Injury Limit	\$2,000,000
Damage to Premises Rented to You	\$300,000
Medical Expense Limit	\$10,000
Per Project General Aggregate Limit, Per Location General Aggregate Limit or Per Project and Per Location General Aggregate Limit	\$4,000,000

IV. SECTION V – DEFINITIONS, is amended to include the following:

WAIVER OF TRANSFER OF RIGHTS OF RECOVERY AGAINST OTHERS TO US (WAIVER OF SUBROGATION)

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
ELECTRONIC DATA LIABILITY COVERAGE PART
LIQUOR LIABILITY COVERAGE PART
POLLUTION LIABILITY COVERAGE PART DESIGNATED SITES
POLLUTION LIABILITY LIMITED COVERAGE PART DESIGNATED SITES
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
UNDERGROUND STORAGE TANK POLICY DESIGNATED TANKS

SCHEDULE

Name Of Person(s) Or Organization(s):
PURSUANT TO APPLICABLE WRITTEN CONTRACT OR AGREEMENT YOU ENTER INTO.
Information required to complete this Schedule, if not shown above, will be shown in the Declarations.

The following is added to Paragraph 8. **Transfer Of Rights Of Recovery Against Others To Us** of Section IV – Conditions:

We waive any right of recovery against the person(s) or organization(s) shown in the Schedule above because of payments we make under this Coverage Part. Such waiver by us applies only to the extent that the insured has waived its right of recovery against such person(s) or organization(s) prior to loss. This endorsement applies only to the person(s) or organization(s) shown in the Schedule above.

ENDORSEMENT

This endorsement, effective 12:01 A.M. 9/1/24 forms a part of

policy No. 2507820 issued to BMY Construction Group, Inc.

by NATIONAL UNION FIRE INSURANCE COMPANY OF PITTSBURGH, PA

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ADDITIONAL INSURED - WHERE REQUIRED UNDER CONTRACT OR AGREEMENT

This endorsement modifies insurance provided under the following:

BUSINESS AUTO COVERAGE FORM

SCHEDULE

ADDITIONAL INSURED:

ANY PERSON OR ORGANIZATION FOR WHOM YOU ARE CONTRACTUALLY BOUND TO PROVIDE ADDITIONAL INSURED STATUS BUT ONLY TO THE EXTENT OF SUCH PERSON OR ORGANIZATIONS LIABILITY ARISING OUT OF THE USE OF A COVERED AUTO.

I. SECTION II - LIABILITY COVERAGE, A. Coverage, 1. - Who Is Insured, is amended to add:

- d. Any person or organization, shown in the schedule above, to whom you become obligated to include as an additional insured under this policy, as a result of any contract or agreement you enter into which requires you to furnish insurance to that person or organization of the type provided by this policy, but only with respect to liability arising out of use of a covered "auto". However, the insurance provided will not exceed the lesser of:

- (1) The coverage and/or limits of this policy, or
- (2) The coverage and/or limits required by said contract or agreement.



Authorized Representative or
Countersignature (in States Where
Applicable)

ENDORSEMENT

This endorsement, effective 12:01 A.M. 9/1/24 forms a part of

policy No. 2507820 issued to BMY Construction Group, Inc.

by NATIONAL UNION FIRE INSURANCE COMPANY OF PITTSBURGH, PA

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

INSURANCE PRIMARY AS TO CERTAIN ADDITIONAL INSURED


This endorsement modifies insurance provided under the following:

BUSINESS AUTO COVERAGE FORM

Section IV - Business Auto Conditions, B., General Conditions, 5., Other Insurance, c., is amended by the addition of the following sentence:

The insurance afforded under this policy to an additional insured will apply as primary insurance for such additional insured where so required under an agreement executed prior to the date of accident. We will not ask any insurer that has issued other insurance to such additional insured to contribute to the settlement of loss arising out of such accident.

All other terms and conditions remain unchanged.



Authorized Representative or
Countersignature (in States Where
Applicable)

ENDORSEMENT

This endorsement, effective 12:01 A.M. 9/1/24 forms a part of

policy No. 2507820 issued to BMY Construction Group, Inc.

by NATIONAL UNION FIRE INSURANCE COMPANY OF PITTSBURGH, PA

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

WAIVER OF TRANSFER OF RIGHTS OF RECOVERY AGAINST OTHERS TO US

This endorsement modifies insurance provided under the following:

BUSINESS AUTO COVERAGE FORM

Section IV - Business Auto Conditions, A. - Loss Conditions, 5. - Transfer of Rights of Recovery Against Others to Us, is amended to add:

However, we will waive any right of recover we have against any person or organization with whom you have entered into a contract or agreement because of payments we make under this Coverage Form arising out of an "accident" or "loss" if:

- (1) The "accident" or "loss" is due to operations undertaken in accordance with the contract existing between you and such person or organization; and
- (2) The contract or agreement was entered into prior to any "accident" or "loss".

No waiver of the right of recovery will directly or indirectly apply to your employees or employees of the person or organization, and we reserve our rights or lien to be reimbursed from any recovery funds obtained by any injured employee.



AUTHORIZED REPRESENTATIVE

BLANKET WAIVER OF OUR RIGHT TO RECOVER FROM OTHERS ENDORSEMENT

This endorsement changes the policy to which it is attached effective on the inception date of the policy unless a different date is indicated below.

(The following "attaching clause" need be completed only when this endorsement is issued subsequent to preparation of the policy).


This endorsement, effective 12:01 AM 9/1/24 forms a part of Policy No. WC 048-24-0256

Issued to **BMY CONSTRUCTION GROUP, INC.**

By **NATIONAL UNION FIRE INSURANCE COMPANY OF PITTSBURGH, PA.**

We have a right to recover our payments from anyone liable for an injury covered by this policy. We will not enforce our right against any person or organization with whom you have a written contract that requires you to obtain this agreement from us, as regards any work you perform for such person or organization.

The additional premium for this endorsement shall be 2.00 % of the total estimated workers compensation premium for this policy.



PROPOSAL TO THE COUNTY OF FRESNO

Contract: **DBH OLIVE AVENUE CAMPUS REMODEL**

Contract No.: **24-S-09**

Fund / Subclass / Org / Account / Program or Memo No.: **0400 / 10072 / 8872 / 8150 / 91940**

Work to be performed: The work to be done consists, in general, of remodeling the Department of Behavioral Health (DBH) building, an approximately 115,000 square foot office building located at 5555 E. Olive Avenue, Fresno, CA 93727. The building interior will be renovated to provide adult and children behavioral health service suites, adult and children urgent care suites, medical and records support suites, a multi-purpose/childcare suite, and staff offices.

The work to be done is shown on a set of Plans, entitled: "THE COUNTY OF FRESNO DEPARTMENT OF BEHAVIORAL HEALTH OLIVE AVENUE CAMPUS REMODEL – VOLUME 1" and "THE COUNTY OF FRESNO DEPARTMENT OF BEHAVIORAL HEALTH OLIVE AVENUE CAMPUS REMODEL – VOLUME 2"

Building No.: **632**

Project Address:
**5555 E. Olive Avenue
Fresno, CA 93727**

In case of a discrepancy between words and figures, the words shall prevail.

If this proposal shall be accepted and the undersigned shall fail to contract, as aforesaid, and to give the two bonds in the sums to be determined as aforesaid, each issued by a surety satisfactory to the Awarding Authority, within ten (10) days after the award of the contract, the Awarding Authority, at its option, may determine that the bidder has abandoned the contract, and thereupon this proposal and the acceptance thereof shall be null and void, and the forfeiture of such security accompanying this proposal shall operate and the same shall be the property of the County.

The undersigned, as bidder, declares that all addenda issued with respect to this bid have been received and incorporated into this Proposal. The bidder's signature on this Proposal also constitutes acknowledgement of all addenda.

The undersigned, as bidder, declares that the only persons, or parties interested in this proposal as principals are those named herein; that this proposal is made without collusion with any other person, firm or corporation; that the bidder has carefully examined the annexed proposed form of contract, and the plans therein referred to; and the bidder proposes and agrees if this proposal is accepted, that the bidder will contract with the County of Fresno to provide all necessary machinery, tools, apparatus and other means of construction, and to do all the work and furnish all the materials specified in the contract in the manner and time therein prescribed, and according to the requirements of the County as therein set forth, and that the bidder will take in full payment therefor the following lump sum price, to-wit:

BID FORM

BIDDER: BMY Construction Group, Inc.

Contract No.: 24-S-09 Project: DBH OLIVE AVENUE CAMPUS REMODEL	
Lump Sum Price Written In Words	In Figures
1.) Base Bid Seventeen Million six hundred eighty seven thousand Dollars	\$ 17,687,000

Acknowledgment of Addendum:			
Addendum No. <u> 1 </u>	Dated <u> 2/21/25 </u>	Addendum No. <u> 3 </u>	Dated <u> 3-3-25 </u>
Addendum No. <u> 2 </u>	Dated <u> 2/25/25 </u>	Addendum No. <u> </u>	Dated <u> </u>

END OF PROPOSAL FORM
END OF SECTION

BID SECURITY FORM

PROJECT: DBH OLIVE AVENUE CAMPUS REMODEL

CONTRACT: #24-S-09

Accompanying this proposal is security (check one only) in an amount equal to at least ten percent (10%) of the total amount of the bid:

Bid Bond ☒; Certified Check ☐; Cashier's Check ☐; Cash (\$ _____)

The names of all persons interested in the foregoing proposal as principals are as follows:

Business Name BMV Construction Group, Inc.

Note: If bidder or other interested person is a corporation, state legal name of corporation. If bidder is a co-partnership, state true name of firm.

Business Owners and Officers Names Eric Bower- President, Marissa Bower, Officer, Nick Wicks- Officer

Note: If bidder or other interested person is:

- a corporation, list names of the president, secretary, treasurer and manager thereof
- a partnership, list names of all individual co-partners composing firm.
- an individual, state first and last name in full.

Names of Owners and Key Employees Eric Bower - Owner

Note: List majority owners of your firm. If multiple owners, list all. Also include anyone, including key employees, who are actively promoting the contract. (SB1439)

Licensed in accordance with an act providing for the registration of Contractors:

Class A, B, C-8 Contractor License No. 686178 Expires 1/31/2027

DIR Registration Number 1000000147

Business Address: 5485 E. Olive Ave. Fresno, CA 93727

Mailing Address: 5485 E. Olive Ave. Fresno, CA 93727

Business Phone: (559) 243-4200 Fax Number: () N/A

Email Address estimating@bmyinc.com

Signature of Bidder:  Dated: 2/20/2025

NOTE: If bidder is a corporation, the legal name of the corporation shall be set forth above together with the signature of the officer or officers authorized to sign contracts on behalf of the corporation; if bidder is a co-partnership, the true name of the firm shall be set forth above together with the signature of the partner or partners authorized to sign contracts on behalf of the co-partnership; and if bidder is an individual, their signature shall be placed above. If signature is by an agent, other than an officer of a corporation or a member of a partnership, a Power of Attorney must be on file with the Owner prior to opening bids or submitted with the bid; otherwise, the bid will be disregarded as irregular and unauthorized.

END OF SECTION

CONTRACT # 24-S-09

BIDDER: BMY Construction Group, Inc.

SUBCONTRACTORS

The following named subcontractor(s) will perform with labor, or otherwise render services to the general contractor in or about the construction of the work or improvement in an amount in excess of one-half of one percent of the total bid presented herewith. Submission of subcontractor's name, location of business and description of work, California contractor's license number and public works contractor registration number issued pursuant to Section 1725.5 of the Labor Code, all are REQUIRED, by Section 4104 of the California Public Contract Code, to be submitted prior to bid opening. (The "location of business" must specify the city in which the subcontractor's business is located, and the state if other than California.) All other requested information shall be submitted, either with the bid or within 24 hours after bid opening.

Please fill out as completely as possible when submitting your bid. Use subcontractor's business name style as registered with the License Board.

FAILURE TO LIST SUBCONTRACTORS AS DIRECTED MAY RENDER THE BID NON-RESPONSIVE, OR MAY RESULT IN ASSESSMENT OF A PENALTY AGAINST THE BIDDER IN ACCORDANCE WITH SECTION 4110 OF THE CALIFORNIA PUBLIC CONTRACT CODE.

SUBCONTRACTOR: <u>CenCal Services</u>	
Business Address: <u>Fresno</u>	
Class: _____	License No. <u>976935</u> DIR Registration No. <u>1000002906</u>
Item No. or Description of Work: <u>Demolition</u>	
Dollar Amount: _____	OR Percentage of Total Bid: _____
Email Address: _____	

SUBCONTRACTOR: <u>CenCal Services</u>	
Business Address: <u>Fresno</u>	
Class: _____	License No. <u>976935</u> DIR Registration No. <u>1000002906</u>
Item No. or Description of Work: <u>Concrete</u>	
Dollar Amount: _____	OR Percentage of Total Bid: _____
Email Address: _____	

BIDDER: BMY Construction Group, Inc.

SUBCONTRACTOR: Ceiling Experts
Business Address: Roseville
Class: _____ License No. 917629 DIR Registration No. 1000006305
Item No. or Description of Work: Popcorn Acoustic Ceiling
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Popcorn Acoustic Ceiling~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Popcorn Acoustic Ceiling~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Legacy Insulation
Business Address: Salida
Class: _____ License No. 1070962 DIR Registration No. 100817223
Item No. or Description of Work: Insulation
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Popcorn Acoustic Ceiling~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: American Window
Business Address: Napa
Class: _____ License No. 1066478 DIR Registration No. 1000853023
Item No. or Description of Work: Doors / Frames / Hardware
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: American Window
Business Address: Napa
Class: _____ License No. 1066478 DIR Registration No. 1000853023
Item No. or Description of Work: Glass / Glazing
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Jackson Young
Business Address: Clovis
Class: _____ License No. 1026018 DIR Registration No. 1000056320
Item No. or Description of Work: Metal Framing / Drywall
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Visalia Ceramic Tile
Business Address: Visalia
Class: _____ License No. 481599 DIR Registration No. 1000000896
Item No. or Description of Work: Ceramic Tile
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: ~~XXXXXXXXXXXXXXXXXXXX~~
Business Address: ~~XXXXXXXXXXXXXXXXXXXX~~
Class: _____ License No. ~~XXXXXXXXXXXX~~ DIR Registration No. ~~XXXXXXXXXXXX~~
Item No. or Description of Work: ~~XXXXXXXXXXXX~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: DFS Flooring
Business Address: Fresno
Class: _____ License No. 999046 DIR Registration No. 1000006695
Item No. or Description of Work: Flooring
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Duration Painting
Business Address: Fresno
Class: _____ License No. 831 338 DIR Registration No. 1000511999
Item No. or Description of Work: Painting
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: _____
Business Address: _____
Class: _____ License No. _____ DIR Registration No. _____
Item No. or Description of Work: ~~Painting~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Shelco
Business Address: Fresno
Class: _____ License No. 423565 DIR Registration No. 1000007336
Item No. or Description of Work: Toilet Compartments / Accessories
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Pyramid Systems
Business Address: _____
Class: _____ License No. 721011 DIR Registration No. 1000002660
Item No. or Description of Work: Casework
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

BIDDER: BMY Construction Group, Inc.

SUBCONTRACTOR: Johnson Fire Protection
Business Address: Visalia
Class: _____ License No. 945080 DIR Registration No. 1000022773
Item No. or Description of Work: Fire Sprinklers
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: American Inc.
Business Address: Visalia
Class: _____ License No. 292529 DIR Registration No. 1000000369
Item No. or Description of Work: Plumbing
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: ~~FOSS~~
Business Address: ~~FOSS~~
Class: _____ License No. ~~FOSS~~ DIR Registration No. ~~FOSS~~
Item No. or Description of Work: ~~FOSS~~
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: Berg Electric
Business Address: Rancho Cordova
Class: _____ License No. 85046 DIR Registration No. 1000000328
Item No. or Description of Work: Electrical
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

SUBCONTRACTOR: El Dorado Excavation
Business Address: Clovis
Class: _____ License No. 1046481 DIR Registration No. 10000062319
Item No. or Description of Work: Earthwork / Paving
Dollar Amount: _____ OR Percentage of Total Bid: _____
Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: <u>~~Emcor~~ Fresno Fence Connection</u> Business Address: <u>Fresno</u> Class: _____ License No. <u>692620</u> DIR Registration No. <u>1000014751</u> Item No. or Description of Work: <u>Fencing</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: <u>Emcor</u> Business Address: <u>Fresno</u> Class: _____ License No. <u>611215</u> DIR Registration No. <u>1000395293</u> Item No. or Description of Work: <u>HVAC</u> Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: _____ Business Address: _____ Class: _____ License No. _____ DIR Registration No. _____ Item No. or Description of Work: _____ Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: _____ Business Address: _____ Class: _____ License No. _____ DIR Registration No. _____ Item No. or Description of Work: _____ Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____
SUBCONTRACTOR: _____ Business Address: _____ Class: _____ License No. _____ DIR Registration No. _____ Item No. or Description of Work: _____ Dollar Amount: _____ OR Percentage of Total Bid: _____ Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

6

BIDDER: BMY Construction Group, Inc.

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

BIDDER: BMV Construction Group, Inc.

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ **OR** Percentage of Total Bid: _____

Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

BIDDER: BMY Construction Group, Inc.

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

SUBCONTRACTOR: _____

Business Address: _____

Class: _____ License No. _____ DIR Registration No. _____

Item No. or Description of Work: _____

Dollar Amount: _____ OR Percentage of Total Bid: _____

Email Address: _____

END OF SECTION

CONTRACT # 24-S-09

CONTRACT: DBH OLIVE AVENUE CAMPUS REMODEL
CONTRACT NO.: 24-S-09

To the Board of Supervisors, County of Fresno:

NON-COLLUSION DECLARATION TO BE EXECUTED BY BIDDER AND SUBMITTED
WITH BID *

The undersigned declares:

"I am the Owner of
(Owner, Partner, Corporate Officer (list title), Co-Venturer)

BMV Construction Group, Inc., the party making the
foregoing bid.

The bid is not made in the interest of, or on behalf of, any undisclosed person, partnership, company, association, organization, or corporation. The bid is genuine and not collusive or sham. The bidder has not directly or indirectly induced or solicited any other bidder to put in a false or sham bid. The bidder has not directly or indirectly colluded, conspired, connived, or agreed with any bidder or anyone else to put in a sham bid, or refrain from bidding. The bidder has not in any manner, directly or indirectly, sought by agreement, communication, or conference with anyone to fix the bid price of the bidder or any other bidder, or to fix any overhead, profit, or cost element of the bid price, or of that of any other bidder. All statements contained in the bid are true. The bidder has not, directly or indirectly, submitted his or her bid price or any breakdown thereof, or the contents thereof, or divulged information or data relative thereto, to any corporation, partnership, company, association, organization, bid depository, or to any member or agent thereof, and has not paid, and will not pay, any person or entity for that purpose.

Any person executing this declaration on behalf of a bidder that is a corporation, partnership, joint venture, limited liability company, limited liability partnership, or any other entity, hereby represents that he or she has full power to execute, and does execute, this declaration on behalf of the bidder.

I declare under penalty of perjury under the laws of the State of California that the foregoing is true and correct and that this declaration is executed on

February 20, 2025 at Fresno, CA.
[date] [city] [state]

Eric Bower
(Printed or Typed Name)


(Signature)

(See Title 23 United States Code Section 112; Calif Public Contract Code Section 7106)

* **NOTE:** Completing, signing, and returning the Non-collusion Declaration is a required part of each Proposal. Bidders are cautioned that making a false certification may subject the certifier to criminal prosecution.

END OF SECTION

**TITLE 13, CALIFORNIA CODE OF REGULATIONS § 2449(I) GENERAL REQUIREMENTS
FOR IN-USE OFF-ROAD DIESEL-FUELED FLEETS**

In conformance with Title 13 § 2449(i), bidders will be required to attach copies of valid Certificates of Reported Compliance for the fleet selected for the contract and their listed subcontractors.

Before May 15th of each year, the prime contractor must collect a new valid Certificate of Reported Compliance for the current compliance year, as defined in section 2449(n), from all fleets that have an ongoing contract with the prime contractor as of March 1 of that year. Prime contractors must not write contracts to evade this requirement. Annual renewals must be provided to the Resident Engineer at least one week prior to the expiration date of the current certificate.

<https://ww2.arb.ca.gov/resources/fact-sheets/fact-sheet-contracting-requirements>

Choose all that apply:

- ☒ Bidder's Certificate of Reported Compliance has been attached to the bid.
- ☐ Bidder does not have a fleet subject to this regulation as outlined in Section 2449(i)(1)-(4).
- ☒ Listed subcontractors' certificates have been attached or will be submitted within five (5) calendar days of the bid opening.
- ☐ The following subcontractors do not have a fleet subject to this regulation as outlined in Section 2449(i)(1)-(4):

**FAILURE TO PROVIDE THE CERTIFICATES OF REPORTED COMPLIANCE AS
DIRECTED MAY RENDER THE BID NON-RESPONSIVE.**

END OF SECTION

CONTRACT # 24-S-09

California Environmental Protection Agency
Air Resources Board


January 1, 2025

**CERTIFICATE OF REPORTED COMPLIANCE
OFF-ROAD DIESEL VEHICLE REGULATION**

is issued to

BMY CONSTRUCTION GROUP INC.

This certificate indicates that the fleet listed above has reported off-road diesel vehicles to the California Air Resources Board and has certified they are in compliance with title 13 CCR, section 2449. All applicable vehicles owned by the individual, company, or agency must be reported and labeled, as specified in Section 2449, with all possible completeness, else this certificate is null and void. **Certificate expires 2/28/2026**



Jack Kitowski
Chief, Mobile Source Control Division
California Air Resources Board

Off-road Diesel Fleet Identification

153899

To verify the authenticity of this certificate, enter this number at
http://www.arb.ca.gov/doors/compliance_cert1.html

DBH OLIVE AVENUE CAMPUS REMODEL
FRESNO, CA

GUARANTY
SECTION 006536 - 1

**DBH OLIVE AVENUE CAMPUS REMODEL
CONTRACT NO: 24-S-09**

This guaranty shall be executed by the successful bidder in accordance with Section 2.32 of the General Conditions. The bidder may execute the guaranty on this page at the time of submitting the bid or may, in the alternative, submit it with the insurance certificates and bonds within ten (10) days after award.

GUARANTY

To the Owner: County of Fresno


The undersigned guarantees the construction and installation of the following work included in this project:

ALL WORK

Should any of the materials or equipment prove defective or should the work as a whole prove defective, due to faulty workmanship, material furnished or methods of installation, or should the work or any part thereof fail to operate properly as originally intended and in accordance with the plans and specifications, due to any of the above causes, all within twelve (12) months after the date on which this contract is accepted by the Owner, the undersigned agrees to reimburse the Owner, upon demand, for its expenses incurred in restoring said work to the condition contemplated in said project, including the cost of any such equipment or materials replaced and the cost of removing and replacing any other work necessary to make such replacement or repairs, or, upon demand by the Owner, to replace any such material and to repair said work completely without cost to the Owner so that said work will function successfully as originally contemplated.

The Owner shall have the unqualified option to make any needed replacement or repairs itself or to have such replacements or repairs done by the undersigned. In the event the Owner elects to have said work performed by the undersigned, the undersigned agrees that the repairs shall be made and such materials as are necessary shall be furnished and installed within a reasonable time after the receipt of demand from the Owner. If the undersigned shall fail or refuse to comply with their obligations under this guaranty, the Owner shall be entitled to all costs and expenses reasonably incurred by reason of said failure or refusal.

Name (Printed): Eric Bower

Signature: 

Title: President

Date: 2/20/2025

Contractor: BMY Construction Group, Inc.

END OF SECTION

CONTRACT # 24-S-09

Document A310™ – 2010

Conforms with The American Institute of Architects AIA Document 310

Bid Bond

CONTRACTOR:

(Name, legal status and address)

BMV Construction Group, Inc.
5485 E. Olive Ave.
Fresno, CA 93727

SURETY:

(Name, legal status and principal place of business)

Endurance Assurance Corporation
4 Manhattanville Road
Purchase, NY 10577

OWNER:

(Name, legal status and address)

County of Fresno
2220 Tulare Street
Fresno, CA 93721

Mailing Address for Notices

Same as Above

This document has important legal consequences.

Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

BOND AMOUNT: Ten Percent (10%) of Bid Amount

PROJECT:

(Name, location or address, and Project number, if any)

DBH Olive Avenue Campus Remodel
5555 E. Olive Avenue, Fresno, CA 93727

The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.

If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

Signed and sealed this 20th day of February, 2025.



(Witness)

BMV Construction Group, Inc.

(Principal)


(Seal)



(Title) ERIC Z. BOWER, PRESIDENT

Endurance Assurance Corporation

(Surety)



(Title) Jon Richard Sullivan, Attorney-in-Fact

CALIFORNIA ACKNOWLEDGMENT

CIVIL CODE § 1189

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California

County of

Fresno

On

February 20, 2025

Date

before me,

Janna Jensen, Notary Public


Here Insert Name and Title of the Officer

personally appeared

Eric Bower

Name(s) of Signer(s)

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

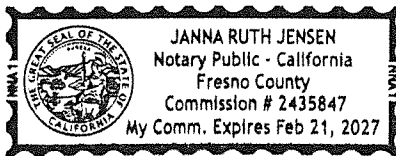

Place Notary Seal and/or Stamp Above

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.

Signature

Janna Jensen

Signature of Notary Public

OPTIONAL

Completing this information can deter alteration of the document or fraudulent reattachment of this form to an unintended document.

Description of Attached Document

Title or Type of Document: _____

Document Date: _____ Number of Pages: _____

Signer(s) Other Than Named Above: _____

Capacity(ies) Claimed by Signer(s)

Signer's Name: _____

☐ Corporate Officer – Title(s): _____☐ Partner – ☐ Limited ☐ General☐ Individual ☐ Attorney in Fact☐ Trustee ☐ Guardian or Conservator☐ Other: _____

Signer is Representing: _____

Signer's Name: _____

☐ Corporate Officer – Title(s): _____☐ Partner – ☐ Limited ☐ General☐ Individual ☐ Attorney in Fact☐ Trustee ☐ Guardian or Conservator☐ Other: _____

Signer is Representing: _____

ACKNOWLEDGMENT

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California
County of Marin)

On February 20, 2025 before me, Emma Nichols, Notary Public
(insert name and title of the officer)

personally appeared Jon Richard Sullivan,
who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are
subscribed to the within instrument and acknowledged to me that he/she/they executed the same in
his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the
person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.


I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing
paragraph is true and correct.

WITNESS my hand and official seal.

Signature



(Seal)

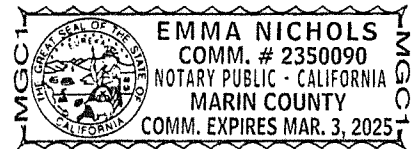

KNOW ALL BY THESE PRESENTS, that Endurance Assurance Corporation, a Delaware corporation ('EAC'), Endurance American Insurance Company, a Delaware corporation ('EAIC'), Lexon Insurance Company, a Texas corporation ('LIC'), and/or Bond Safeguard Insurance Company, a South Dakota corporation ('BSIC'), each, a "Company" and collectively, "Sompo International," do hereby constitute and appoint: Emmalyn Nichols, Cathrine A Pinney, Jon Richard Sullivan, Matt Lockie

as true and lawful Attorney(s)-In-Fact to make, execute, seal, and deliver for, and on its behalf as surety or co-surety; bonds and undertakings given for any and all purposes, also to execute and deliver on its behalf as aforesaid renewals, extensions, agreements, waivers, consents or stipulations relating to such bonds or undertakings provided, however, that no single bond or undertaking so made, executed and delivered shall obligate the Company for any portion of the penal sum thereof in excess of the sum of **One Hundred Million (\$100,000,000.00)**

Such bonds and undertakings for said purposes, when duly executed by said attorney(s)-in-fact, shall be binding upon the Company as fully and to the same extent as if signed by the President of the Company under its corporate seal attested by its Corporate Secretary.

This appointment is made under and by authority of certain resolutions adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC, a copy of which appears below under the heading entitled "Certificate".

This Power of Attorney is signed and sealed by facsimile under and by authority of the following resolution adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolution has not since been revoked, amended or repealed:

RESOLVED, that the signature of an individual named above and the seal of the Company may be affixed to any such power of attorney or any certificate relating thereto by facsimile, and any such power of attorney or certificate bearing such facsimile signature or seal shall be valid and binding upon the Company in the future with respect to any bond or undertaking to which it is attached.

IN WITNESS WHEREOF, each Company has caused this instrument to be signed by the following officers, and its corporate seal to be affixed this 25th day of May, 2023.

Endurance Assurance Corporation

Endurance American Insurance Company

Lexon Insurance Company

Bond Safeguard Insurance Company

Richard M Appel

Richard M Appel

Richard M Appel

Richard M Appel

By:
Richard Appel; SVP & Senior Counsel

By:
Richard Appel; SVP & Senior Counsel

By:
Richard Appel; SVP & Senior Counsel

By:
Richard Appel; SVP & Senior Counsel



ACKNOWLEDGEMENT

On this 25th day of May, 2023, before me, personally came the above signatories known to me, who being duly sworn, did depose and say that he/she is an officer of each of the Companies; and that he executed said instrument on behalf of each Company by authority of his office under the by-laws of each Company.

By:

Amy Taylor

Amy Taylor, Notary Public - My Commission Expires 3/9/27

CERTIFICATE

I, the undersigned Officer of each Company, DO HEREBY CERTIFY that:

1. That the original power of attorney of which the foregoing is a copy was duly executed on behalf of each Company and has not since been revoked, amended or modified; that the undersigned has compared the foregoing copy thereof with the original power of attorney, and that the same is a true and correct copy of the original power of attorney and of the whole thereof;
2. The following are resolutions which were adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolutions have not since been revoked, amended or modified:
"RESOLVED, that each of the individuals named below is authorized to make, execute, seal and deliver for and on behalf of the Company any and all bonds, undertakings or obligations in surety or co-surety with others: RICHARD M. APPEL, MATTHEW E. CURRAN, MARGARET HYLAND, SHARON L. SIMS, CHRISTOPHER L. SPARRO, and be it further
RESOLVED, that each of the individuals named above is authorized to appoint attorneys-in-fact for the purpose of making, executing, sealing and delivering bonds, undertakings or obligations in surety or co-surety for and on behalf of the Company."
3. The undersigned further certifies that the above resolutions are true and correct copies of the resolutions as so recorded and of the whole thereof.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal this

20th

day of

February

2025

By: Daniel S. Luge, Secretary

NOTICE: U. S. TREASURY DEPARTMENT'S OFFICE OF FOREIGN ASSETS CONTROL (OFAC)

No coverage is provided by this Notice nor can it be construed to replace any provisions of any surety bond or other surety coverage provided. This Notice provides information concerning possible impact on your surety coverage due to directives issued by OFAC. **Please read this Notice carefully.**

The Office of Foreign Assets Control (OFAC) administers and enforces sanctions policy, based on Presidential declarations of "national emergency". OFAC has identified and listed numerous foreign agents, front organizations, terrorists, terrorist organizations, and narcotics traffickers as "Specially Designated Nationals and Blocked Persons". This list can be located on the United States Treasury's website - <https://www.treasury.gov/resource-center/sanctions/SDN-List>. In accordance with OFAC regulations, if it is determined that you or any other person or entity claiming the benefits of any coverage has violated U.S. sanctions law or is a Specially Designated National and Blocked Person, as identified by OFAC, any coverage will be considered a blocked or frozen contract and all provisions of any coverage provided are immediately subject to OFAC. When a surety bond or other form of surety coverage is considered to be such a blocked or frozen contract, no payments nor premium refunds may be made without authorization from OFAC. Other limitations on the premiums and payments may also apply.

Any reproductions are void.

Surety Claims Submission: LexonClaimAdministration@sompo-intl.com

Telephone: 615-553-9500 Mailing Address: Sompo International; 12890 Lebanon Road; Mount Juliet, TN 37122-2870

